


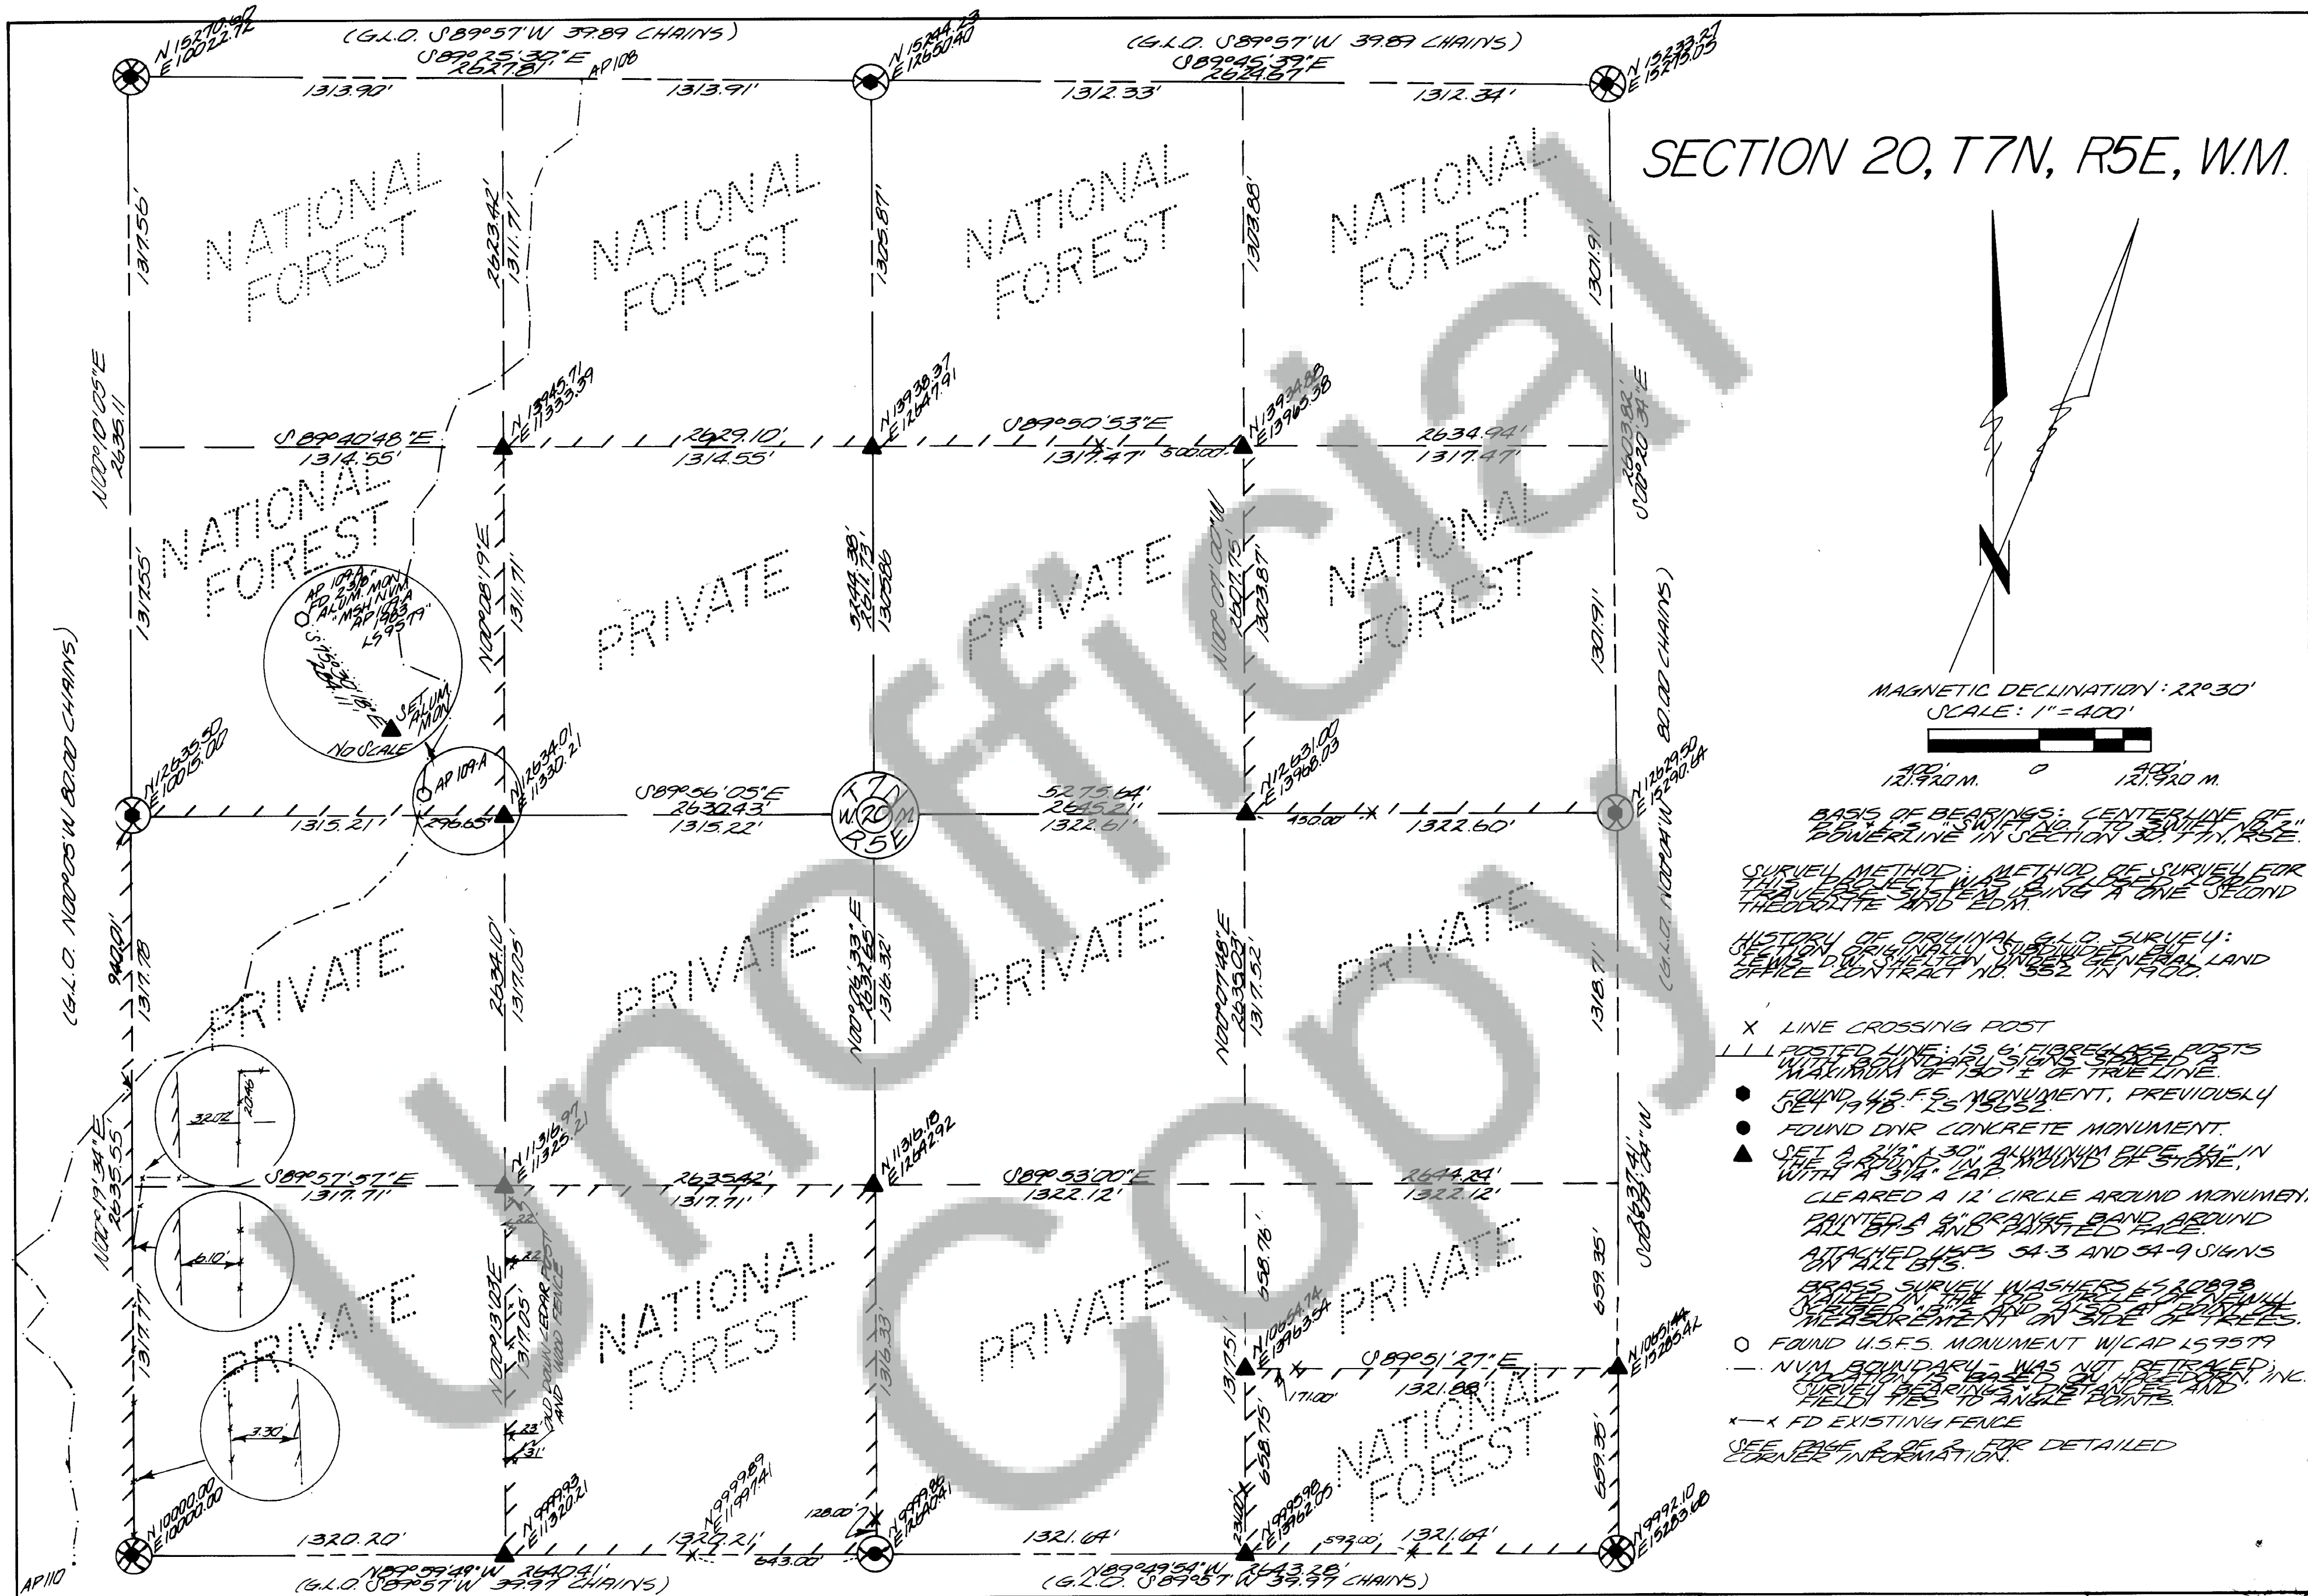

CERTIFICATE NO. _____		SURVEYOR'S CERTIFICATE		RECORD OF SURVEY		BUTLER & ZENKNER LANDSURVEYORS, INC.	
AUDITOR'S CERTIFICATE		THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME		SECTION 20, T7N, R5E, W.M., SKAMANIA		475 NW CHEHALIS AVENUE	
FILED FOR RECORD THIS 20th DAY OF _____, 1984		OR UNDER MY DIRECTION IN CONFORMANCE WITH THE		COUNTY, WASHINGTON.		P.O. BOX 149 (206) 748-8803	
AT 10:00 A.M. IN BOOK _____ OF SURVEYS AT PAGE 113		REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE				CHEHALIS, WASHINGTON	
AT THE REQUEST OF BUTLER & ZENKNER LAND SURVEYORS, INC.		REQUEST OF U.S.D.A. FOREST SERVICE IN AUGUST,				DRN MARLETA / DATE 8-6-84	
_____		1984, UNDER CONTRACT NO. 40-05K3-4-1A74.				CHK'D CAVAL CADRETECH	
_____		_____				JOB NO. 84-47	
COUNTY AUDITOR		LICENSE NO. 20898				SCALE 1" = 400' SHEET 1 OF 2	

SECTION 20, T 7N, R 5E, W.M.
CORNER INFO

7TN R5E
SS 1/64
S20 S21
1984
LS 20898

SOUTH - SOUTH 1/64 SECTION 20, FB 259-C, PG 16
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
7" Hemlock N06°W 36.20', scribed "SS 1/64 S20 BT"
22" Fir S20°W 30.24', scribed "SS 1/64 S20 BT"
Set a 6' fibre-glass guard post West 3.0' on line
with 54-9 sign attached.

7TN R5E
S20
C-W 1/16
1984
LS 20898

CENTER - WEST 1/16 SECTION 20, FB 259-C, PG 21
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
16" Fir S79°W 26.43', scribed "CW 1/16 S20 BT"
14" Fir on double butt N57°E 23.45', scribed "CW 1/16 S20 BT"
Set a 6' fibre-glass guard post N45°W 4.7' with 54-9
sign attached.

7TN R5E
S20
NW 1/16
1984
LS 20898

NORTHWEST 1/16 CORNER SECTION 20, FB 259-C, PG 21
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
12" Fir N40°E 23.05', scribed "NW 1/16 S20 BT"
16" Hemlock S59°E 12.59', scribed "NW 1/16 S20 BT"
Set a 6' fibre-glass guard post N45°W 4.6' with
54-9 sign attached.

7TN R5E
C-N 1/16 • S20
1984
LS 20898

CENTER - NORTH 1/16 CORNER SECTION 20, FB 259-C, PG 22
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
6" Hemlock N01°W 20.95', scribed "CN 1/16 S20 BT"
12" Hemlock S59°E 12.14', scribed "CN 1/16 S20 BT"
Set a 6' fibre-glass guard post North 3.0' on line
with 54-9 sign attached.

7TN R5E
C-E 1/16 • S20
1984
LS 20898

CENTER - EAST 1/16 CORNER SECTION 20, FB 259-C, PG
No stone available within 250' for stone mound
around monument.
Scribed new BT's: (Bark Scribed)
16" Alder N58°W 13.40', scribed "CE 1/16 S20 BT"
12" Alder S19°W 32.47', scribed "CE 1/16 S20 BT"
Set a 6' fibre-glass guard post North 4.40' on line
with 54-9 sign attached.

7TN R5E
S20
NE 1/16
1984
LS 20898

NORTHEAST 1/16 CORNER SECTION 20, FB 259-C, PG
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
29" Hemlock N72°W 30.92', scribed "NE 1/16 S20 BT"
6" Hemlock N88°E 33.44', scribed "NE 1/16 S20 BT"
Set a 6' fibre-glass guard post South 4.70' on line
with 54-9 sign attached.

7TN R5E
S20
E 1/16
1984
LS 20898

EAST 1/16 CORNER SECTIONS 20/29, FB 259-C, PG 17
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
33" Fir S05°W 10.19', scribed "E 1/16 S29 BT"
33" Fir N45°E 7.09', scribed "E 1/16 S20 BT"
Set a 6' fibre-glass guard post West 3.20' on line
with 54-9 sign attached.

7TN R5E
S20
W 1/16
1984
LS 20898

WEST 1/16 CORNER SECTIONS 20/29, FB 259-C, PG 16
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
18" Fir N73°W 23.18', scribed "W 1/16 S20 BT"
23" Fir N56°E 36.68', scribed "W 1/16 S20 BT"
Set a 6' fibre-glass guard post East 3.30' on line
with 54-9 sign attached.

7TN R5E
S20-C-S-SE 1/64
1984
LS 20898

CENTER-SOUTH SOUTHEAST 1/64 CORNER SECTION 20, FB 259-C, PG 18
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
8" Fir BT S30°W 23.63', scribed "C-S-SE 1/64 S20 BT"
13" Hemlock N45°E 14.54', scribed "C-S-SE 1/64 S20 BT"
Set a 6' fibre-glass guard post West 4.20' on line
with 54-9 sign attached.

7TN R5E
S20 • C-S 1/16
1984
LS 20898

CENTER-SOUTH 1/16 CORNER SECTION 20, FB 259-C, PG 20
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
24" Fir S42°W 59.13', scribed "C-S 1/16 S20 BT"
9" Hemlock N80°W 19.26', scribed "C-S 1/16 S20 BT"
Set a 6' fibre-glass guard post West 4.5' on line
with 54-9 sign attached.

7TN R5E
S20 • SW 1/16
1984
LS 20898

SOUTHWEST 1/16 CORNER SECTION 20, FB 259-C, PG 19
No stone available within 250' for stone mound
around monument.
Scribed new BT's:
12" Hemlock N70°W 19.25', scribed "SW 1/16 S20 BT"
12" Hemlock N34°E 10.10', scribed "SW 1/16 S20 BT"
Set a 6' fibre-glass guard post N45°W 5.00 feet
with 54-9 sign attached.

CERTIFICATE NO. _____

AUDITOR'S CERTIFICATE

FILED FOR RECORD THIS _____ DAY OF _____, 19____
AT _____ IN BOOK _____ OF _____ AT PAGE _____
AT THE REQUEST OF BUTLERB ZENNER LAND SURVEYORS, INC.

COUNTY AUDITOR

SURVEYOR'S CERTIFICATE

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME
OR UNDER MY DIRECTION IN CONFORMANCE WITH THE
REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE
REQUEST OF USOR. FOREST SERVICE IN AUGUST
1984, UNDER CONTRACT NO. 48-05K3-4-1214

License No. 20898

BUTLERB ZENNER LANDSURVEYORS, INC.

475 NW CHEHALIS AVENUE
P O BOX 49 (206) 748-8803
CHEHALIS, WASHINGTON

DRAWN BY E.A.B.

DATE 8-6-84

CHK'D E.A.B.

JOB NO 84-47

SCALE 1/8" = 1' SCALE

SHEET 2 OF 2