

92420

WEYERHAEUSER COMPANY

LONGVIEW AREA

BOOK 12/6 PAGE 2

LAND CORNER RECORD

SKAMANIA

County

T 10N N. R. 6E W.M.

Corner Code No. K-L-3-4

Segregated Surveys:

Name PHOENIX No 1 LODGE

Corner No. 2

DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

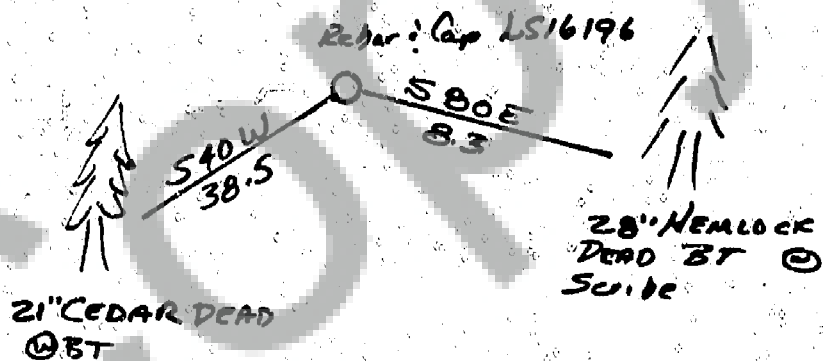
1. History of Corner Establishment and Subsequent Restoration: Segregation Survey

2. Description of Evidence Found: Cedar Post Lying on ground

2 scribed BT's

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 1-81 Page No. 7 Date of work 1-15-81

① 1/4x2 1/4 GALVANIZED NAIL

Washington Plane Coordinates: Zone, Y, X
Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at:

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 2-Feb-81

Signature Archie B. Carpenter

Certificate No. 16196



AUDITOR'S CERTIFICATE

Filed for record this 11th day of May 1981 at 2:00 P.M. In Book 10 of 10 at page 2 at the request of Archie B. Carpenter

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

 ROLL 051981B
 MARRIAGE APPLICATIONS
 DAILY RECORDINGS
 BOARD OF W. COMMISSIONERS
 WEEK OF MAY 7-14

 ROLL
 051981B

 MARRIAGES
 RECORDINGS
 COMMISSIONS

ROLL
051481B

MARRIAGES
RECORDINGS
COMMISSIONERS

ROLL 051981B
MARRIAGE APPLICATIONS
DAILY RECORDINGS
BOARD OF CO. COMMISSIONERS
WEEK OF MAY 7-14

CORNER RECORD INDEX DIAGRAM

A	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
B																									
C			6			5			1					3				2						1	
D																									
E																									
F																									
G			7			8			0					10				11						12	
H																									
J																									
K																									
L			13			17			16					15				14						13	
M																									
N																									
O																									
P			18			20			21					22				23						24	
Q																									
R																									
S																									
T			20			20			24					27				28						25	
U																									
V																									
W																									
X			31			32			33					34				35						36	
Y																									
Z																									

1. The corner record form may be duplicated with the land surveyor's or company name and address at the top.

2. Section and Sectional Subdivision Corners.

Corner Code No. refers to an alphabetical-numerical coordinate number derived from the system shown on the township diagram: i.e., the corner common to sections 5, 6, 7 and 8 is identified by E-5; the $\frac{1}{4}$ corner between sections 10 and 15 by J-15. In those cases where double or triple corners exist, the code number will be for a single point but the corner record must clearly show which corner is being reported.

Corners such as meander corners, angle points, witness points, etc., which fall on one line only will be identified by the line and line sector: i.e., a corner falling between B and C on line 5 would be coded BC-5 and a corner falling on line E between lines 3 and 4 would be designated E-3-4. Corners common to two or more townships will be properly coded and filed in each township affected.

3. Segregated surveys (DLC, HES, Indian Allotments, Tracts, etc.).

Corners of segregated tracts will be identified by the name or designation of the tract followed by the number assigned that corner during the original survey, or if not so numbered in the original survey, will then be numbered in sequence as established. Example: Homestead Entry Survey No. 218, Corner No. 5; John D. Smith Donation Land Claim, Corner No. 1; Tract 42, Corner No. 7; Mineral Survey No. 11047, Corner No. 2; Charlie Wood Indian Allotment, Corner No. 3.

Corners of segregated tracts may be spatially located by the township code: i.e., MN-4-5 would locate a corner in the SE $\frac{1}{4}$, SE $\frac{1}{4}$ of section 18. HJ-9 would locate a tract corner which happens to fall on a section line and should be indexed under both the township code and the segregated tract number.

4. Parts 1, 2 and 3 of the record form boil down to: what information and physical evidence may be available by which a corner position may be ascertained; what evidence was recovered to substantiate this position and what physical evidence and corollary information is available to assist the next person to recover this corner. Let the kind of a corner record you would like to find be your guide in building this record.

Corner records will normally be numbered in sequence for each township as received and the page numbers will be cross indexed on the proper township index plat.