

92954

WEYERHAEUSER COMPANY

LONGVIEW AREA

10/5 PAGE 49

LAND CORNER RECORD

21.22

SKAMANIA

County

Corner Code No. P-13

T 10 N. R. 5 E W.M.

Segregated Surveys:

Corner No.:


Name:

DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration: GLO
 Set rebar in rotten corner tree stump 18" shell 12" above ground.

2. Description of Evidence Found: Remains of corner tree


2 B.T.'s



3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 6-81 Page No. 8 Date of work 14 July 81

☐ Reference plate☒ 4x2 1/4 Galvanized nail

Corner lies 50' north of
 small flat area on ridge
 top. Ground slope 80%
 north.

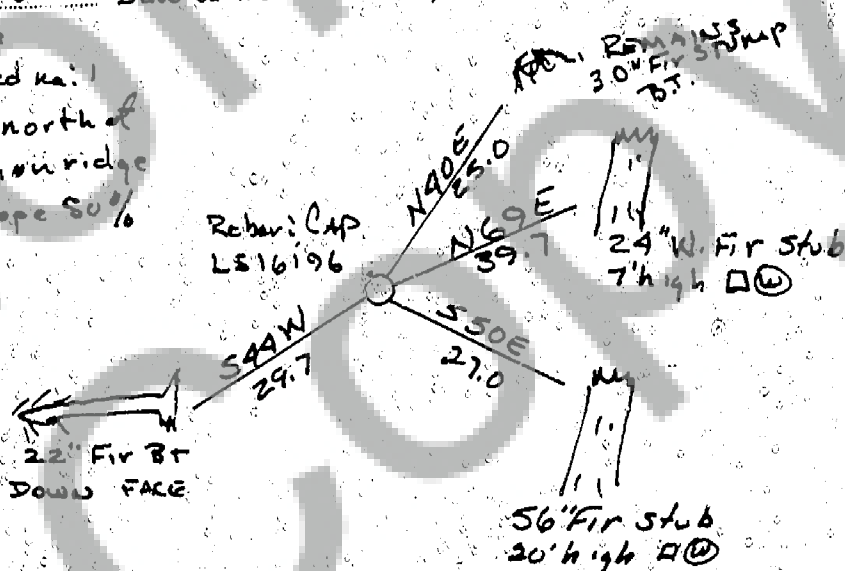

MAGNETIC

Washington Plane Coordinates: _____ Zone, Y _____ X _____
 Order Accuracy. Derived From: _____
 Pin Pointed on Photo No. _____ Date _____ Located at: _____

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 10 Aug 81

Signature Archie B. Carpenter

Certificate No. 16196

Registered ☒
 Indexed Dir. ☒
 Indirect ☒
 Recorded ☒
 Mailed ☒



AUDITOR'S CERTIFICATE

Filed for record this 14th day of August 1981 at 12:30 P.M. In
 Book 10/5 of Monuments at page 49 at the request of Brian Carpenter - Weyerhaeuser Company

D. J. Messenger
 County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

CORNER RECORD INDEX DIAGRAM

A 26x26 grid with letters A-Z on the left and numbers 1-25 on the top. A diamond shape is formed by the intersection of row P and column 13. The diamond is shaded black.

2. Section and Sectional Subdivision Corners.

Corners, such as quarter corners, angle points, witness points, etc., which fall on one line only will be identified by the line and line sector, i.e., a corner falling between B and C on line 5 would be coded BC-5 and a corner falling on line E between lines 3 and 4 would be designated E-3-4. Corners common to two or more townships will be properly coded and filed in each township affected.

- corners of segregated tracts may be spatially located by the township codes, i.e., MN-4-5 would locate a corner in the SE 1/4, SE 1/4, of section 18. H-2-9 would locate a tract corner which happens to fall on a section line and should be indexed under both the township code and the segregated tract number.

- Corner records will normally be numbered in sequence for each township as received and the page numbers will be cross indexed on the proper township index plat.