

Weyerhaeuser Company
Longview Area

LAND CORNER RECORD

SKAMANIA

County

Corner Code No. J-11

T 7 N. R 5 E W.M.

Segregated Surveys:

Name:


Corner No.:

DLC, H&B, Tract, Mining Claim, Indian Allotment, Federal Reserve, Tornado.

1. History of Corner Establishment and Subsequent Restoration: GLO. DNR MON Set 1 Sept 1970 From 2 Br's by C.E. Whitten. High water & debris from the May 18, 1980 eruption deposited 5 to 10' of debris in SW. ft creek either covering or removing corner. Reset R/C from 1970 survey which tied corner. Set rebar with cap Weyco Control on E-W side of 1/4 Cor for reference.

2. Description of Evidence Found: None

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 7-81 Page No. 1 Date of work 9-8-81

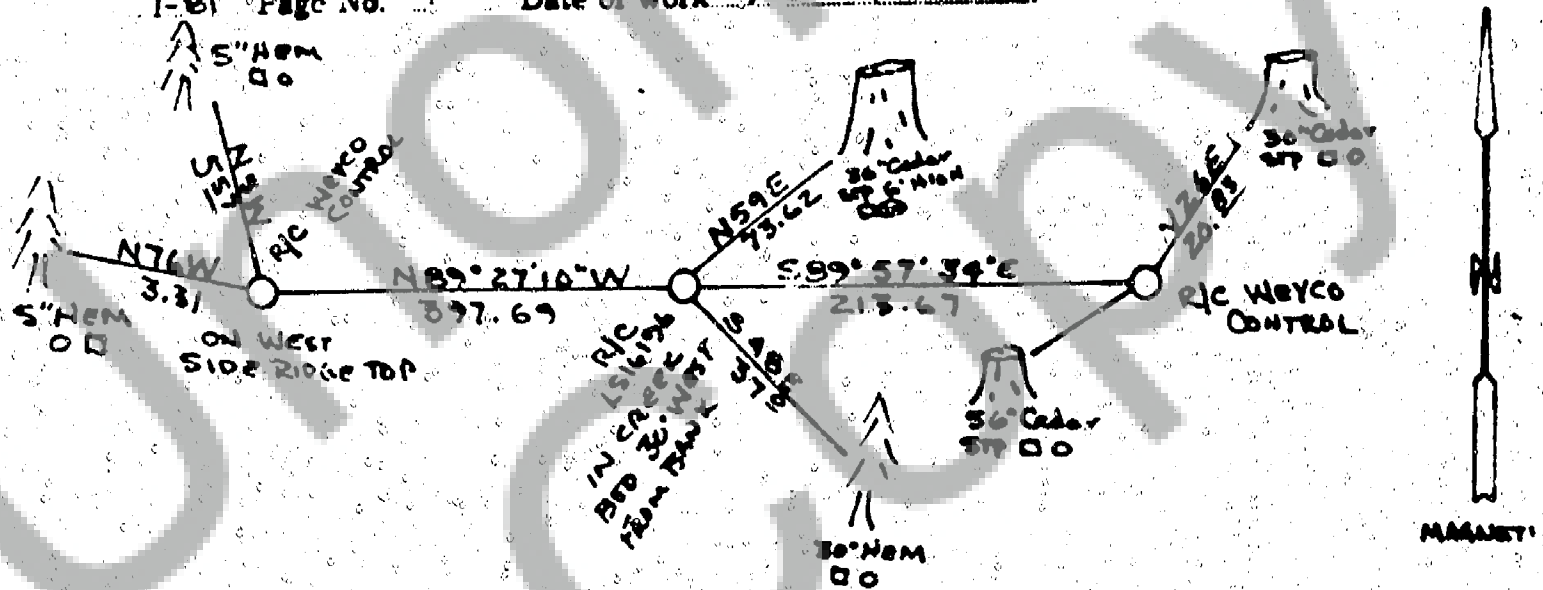

Washington Plane Coordinates: Zone, Y, X
Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 15 Sept 81

Archie B. Carpenter

16156
Certificate No.

Registered
Indexed: ☒
Indirect: ☒
Recorded: ☒
Mailed: ☒

AUDITOR'S CERTIFICATE

Filed for record this 16th day of September 1981 at 11:20 AM. In Book 7/15 of 16156 at page 6 at the request of

Archie B. Carpenter for Weyerhaeuser Company

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 8 (3), Chapter 50, Laws of 1973.

CORNER RECORD INDEX DIAGRAM

A 26x26 grid with letters A-Z on the left and numbers 1-26 on the top. A black diamond is at the intersection of row H and column 10. A large, faint watermark 'C' is visible across the grid.

The former is a form only for distribution with the fund statement or company name and address of the fund.

2. Sample size and frequency distribution of current

Consider Case 3, where α is an algebraic (non-rational) coordinate number derived from the system's data or the townships' structure. In the corner common to sections 5, 6, 7, and 8, a line is identified by the corner's coordinates, (x, y) , and the line's bearing is α . In these cases, where double or triple bearings are used, the surveyor is required to indicate that the corner is or must clearly show.

Sections of a township, blocks, single lots, within blocks, etc., which fall on one line only, will be designated by the line and the section, i.e., a corner falling between B and C on line 5 would be designated as B 5 and a corner falling on line 1 between lines 3 and 4 would be designated E 3 4. Township corners for two or more townships will be properly located and filed in each township affected.

[illegible]

Corner No. 1 is placed at the point identified by the name or designation of the street followed by the corner number assigned that corner during the original survey and if not so numbered in the original survey, will then be placed in sequence as established. Thus, in a rectangular survey, the corners would be: Corner No. 1, South Street on East Side; Corner No. 2, East 42nd Street; Corner No. 3, West 42nd Street; Corner No. 4, North Street on East Side; Corner No. 5, North Street on West Side; Corner No. 6, West 42nd Street; Corner No. 7, South Street on West Side; Corner No. 8, South Street on East Side.

Some of the information is partially limited by the township code. For MN 4-5 would be the township code for the township of 4-5. It would be the township code which happens to be the township code for the township code for the township code and the segregated map number.

4. Part 2 and 3 of the report form deal with the what information and physical evidence may be available in what a corner police may be directed and when evidence was recorded to substantiate the suspect and when physical evidence and witness information is available to assist the investigator to recover the complete information. Do you think you would like to find out more about this report?

Other records, if any, be numbered in sequence for each township as directed and the page numbers will be next indexed on the proper township index plan.