

RES 20-1802(9-77)

BOOK 3/4 PAGE 1

94313

LAND CORNER RECORD

COWLITZ

County

T 8 N. R. 4 E W.M.

Corner Code No. E-17

Segregated Surveys:

Name: NORTHWEST CORNER OF SECTION ELEVEN Corner No. 1
DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Township

History of Corner Establishment and Subsequent Restoration:

ORIGINALLY SET BY GOVERNMENT LAND OFFICE SURVEY

RE-SET BY BUREAU OF LAND MANAGEMENT - 1969

Description of Evidence Found:

FD 2 1/2" PIPE WITH 3" BRASS CAP STAMPED: T8N R4E S31.52 8" UNDER THE SURFACE
S10.511 1969

7" HEMLOCK STUMP, S 44° E, 55.11', VISIBLE SCRIBE, SET BY BLM


36" HEMLOCK STUMP, S 11° W, 40.34', VISIBLE SCRIBE, REC. DIST - 37.62', DISTURBED BY LOGGING

37" HEMLOCK STUMP, N 38° E, 26.80', VISIBLE SCRIBE, REC. DIST - 32.67', DISTURBED BY LOGGING

48" FIR STUMP, N 30° W, 33.99', VISIBLE SCRIBE, PARTIALLY BURIED BY LOGGING

Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 169-1 Page No. 4 Date of work 6-30-82

REFERENCE MONUMENTS ARE
1/2" REBAR WITH CAP (LS15652)
APPROX 4" ABOVE GROUND
HAVE 54-3 AND 54-4 USFS
SIGNS RIVETED TO FIBERGLASS
POST BEHIND EACH RM.
FACING CORNER

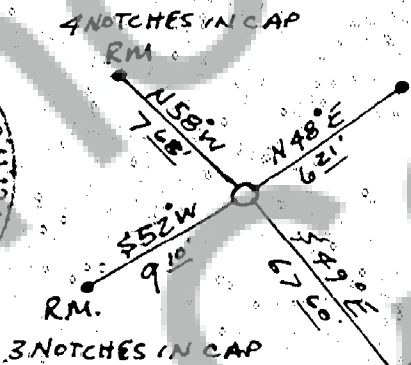

11" HEMLOCK
SCRIBED: T8N R4E S11 BT
BT HAS: 54-3, 54-4 USFS SIGNS
6" PAINTED ORANGE BAND
DIST. TAKEN LEVEL FROM MON TO BRASS TAG TOP CIRCLE
OF NEWLY SCRIBED 8"

Washington Plane Coordinates: Zone, Y

Order Accuracy, Derived From:

Pin Pointed on Photo No.

Date

Located at

SURVEYOR'S CERTIFICATE

[SEAL]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date July 3, 1982

Signature: Michael G. Hobbs Certificate No. 94313

AUDITOR'S CERTIFICATE

Filed for record this 7 day of July 1982 at 11 A.M. In Book 3/4 of Cowlitz County at page 1 at the request of Michael G. Hobbs

County Auditor