

94489

RES 20-1808(9-77)

U.S.F.S.

7/5

39

LAND CORNER RECORD

SKAMANIA

County

Corner Code No. A-25

T 7 N. R 5E W.M.

Segregated Surveys:

Name: NE CORNER SECTION 1 - TIN-RSE

Corner No.: NE - 1

DLC, HES, Tracts Mining Claims, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

ORIGINALLY SET BY G.L.O.

RESTORED BY B.L.M. 1961


2. Description of Evidence Found:

B.L.M. MON. 2 1/2" PIPE W/ BRASS TABLET MARKED.

ORIGINAL CORNER STONE & 1 1/2" I.P. NEXT TO MON.

- OBS'D F.N.D. 28" SILVER FIR (ALIVE) VIS. SCRIBE S 80 1/2° E 4 62' WEYLO R.P. ("PK" NAIL)
 27" SILVER FIR SNAG VIS. SCRIBE S 29 3/4° W 11 88' U.S.F.S. BT. SIGN
 32" SILVER FIR STUMP FACE ONLY U 08 3/4° W 13 86' U.S.F.S. LOC. POSTER
 - ASSUMED B.T. 1961 18" S. FIR (ALIVE) N 39 3/4° E 29 20' U.S.F.S. BT. SIGN

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 161 Page No. 8 Date of work 9/22/81

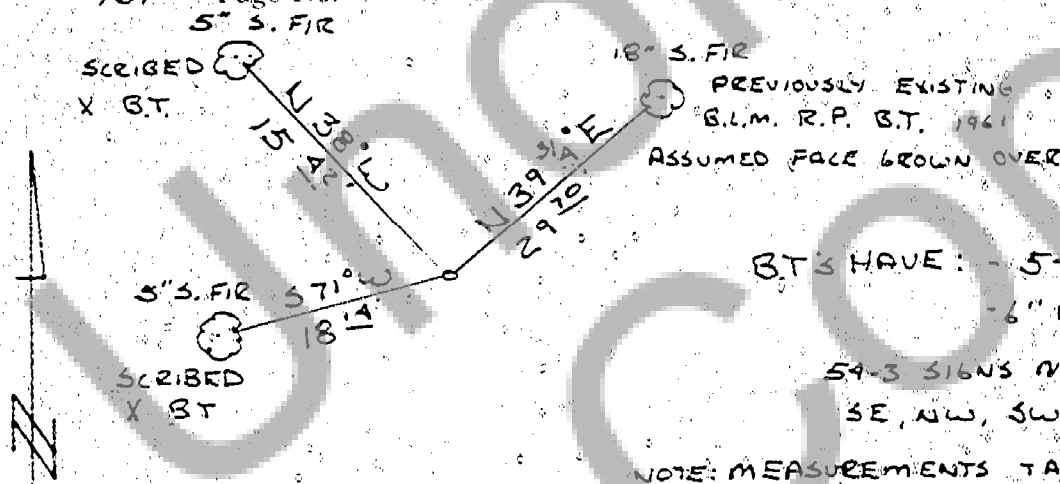

BT'S HAVE: - 54-4 & 54-3 SIGNS NAILED ON
 - 6" RED BANDS PAINTED ON
 54-3 SIGNS NAILED TO O.B.T.'S TO
 SE, NW, SW

NOTE: MEASUREMENTS TAKEN HORZ FROM MON TO
 BRASS SURVEY TAGS (LS 15652) NAILED IN TOP
 CIRCLE OF NEWLY SCRIBED "B"s

Washington Plane Coordinates: Zone Y X
 Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or
 under my direction in compliance with the provisions of Chapter
 50, Laws of 1973. Date July 24, 1982

Signature

Certificate No. LS15652

AUDITOR'S CERTIFICATE

Filed for record this 30th day of JULY 1982 at 2:00 P.M. In
 Book 7/5 of MONUMENTS at page 39 at the request of
 MICHAEL C. HOBBS

J.M. Olson Jr. A. News
 County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2),
 Chapter 50, Laws of 1973.

VOLCANO III