

LAND CORNER RECORD

T. 2 N, R. 5 East, W.M. Skamania County
Segregated Surveys: Corner Code No. Z-1
Name: n/a Corner No.: n/a
DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite

1. History of Corner Establishment and Subsequent Restoration:

Originally set by Justin Chenoweth during 1856 G.L.O. survey of TIN. R4E.
In May 1971, Dept of Game noted 2 B.T.'s and a stone mound, and set a 1-1/4" pipe and cap which was not found during D.N.R. survey.

2. Description of Evidence Found:

58" live Fir B.T. with visible scribing at N 72 W, 85.8 ft.
18" diameter mound of rock at N 82 W, 20.4 ft.
50" live Fir B.T. at S 63 W, 269 ft.
50" live Fir B.T. at S 63 E, 98.34 ft.

54
m.g.k.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 607.07 Page No. 36 Date of work 22 July, '81

Set standard D.N.R. iron pipe and stamped brass cap from intersection of 2 live Fir B.T.'s (NW & SE B.T.'s.)
Shown on D.N.R. Final May 441.
See sketch on back.

Washington Plane Coordinates: South Zone Y 104,813.42 X 1,552,659.72
3rd Order Accuracy Derived From: USC & GS 'Ells' and DNR 3-3N-4E

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Sept 27, 1983

Signature

11977
Certificate No.



AUDITOR'S CERTIFICATE

Filed for record this 6th day of OCTOBER 1983 at 2:30 P.M. In Book 2/5 of MONUMENTS at page 27 at the request of Washington State Department of Natural Resources

M. M. Olson by J. News Dep.
County Auditor

G.L.O. 1857

Post


4" Alder N 7E 84 LKS
 10" Fir N 78W 130 LKS
 6" Fir S 58E 149 LKS
 6" Fir S 63W 408 LKS

Corner is trav station 402 pg 33 this book

Township Cor $\frac{36131}{116}$ 7142W R445E

58" Live Fir BT 120" into tree
 50" Live Fir BT 120" into tree
 50" Live Fir BT 120" into tree
 50" Live Fir BT 120" into tree
 50" Live Fir BT 120" into tree

Dept of Game Survey, May 1971 notes 2 BTs and pile of stones. They set 1 1/4" pipe/rod - we did not find pipe, but pile of stones are 20.4 feet off as shown on sketch.

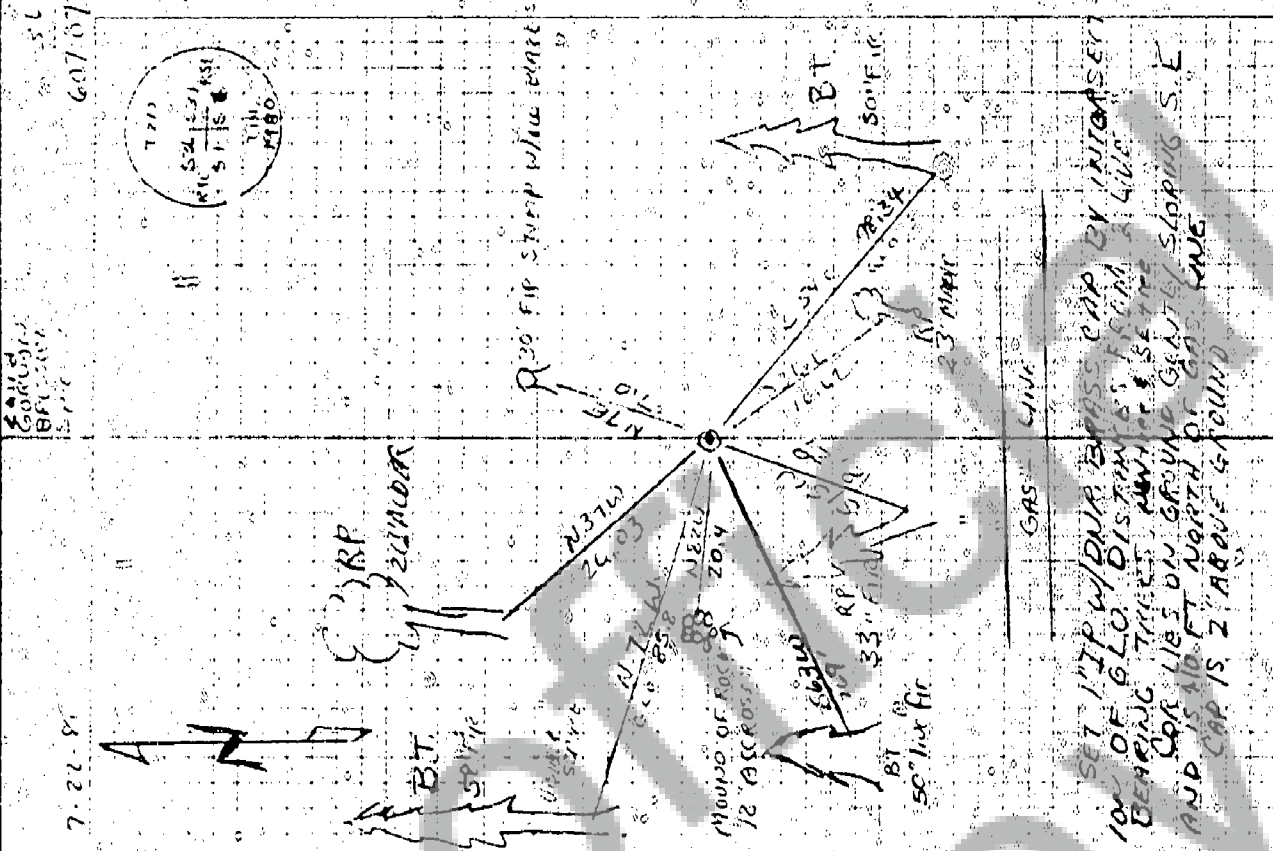

SET 1 1/4" PIPE WITH BRASS CAP BY INTERSECT
 100' OF G.L.O. DISTANCE FROM A 4" PIPE
 BEARING THREE POINTS
 COR 118.5 ON GROUND GRADIENT SLOPING S.E.
 AND COR 118.5 FT NORTH OF COR LINE
 AND COR 118.5 FT ABOVE GROUND