

### LAND CORNER RECORD

T. 2 N, R. 4 East, W.M. Skamania Clark County Corner Code No. X-25  
 Segregated Surveys: Name: n/a Corner No. n/a  
 DLC. HES. Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:  
 Originally set by John Truten during 1857 G.L.O. survey. Restored with 1" iron pipe inside 5" well casing, date set unknown. Skamania County records indicate this pipe to be a witness corner to the 1/4 corner being 34 ft South in the Washougal River. 1" pipe used as 1/4 corner on 1971 unrecorded survey by Dept. of Game. In 1977, Wallace and Assoc. used Dept. of Game tie to 1" pipe as shown in Book 7 pg 106.

2. Description of Evidence Found:  
 Above mentioned 1" x 30" iron pipe inside 5" well casing at N 82 W, 21.51 ft. from D.N.R. R.M. position. Not accepted this survey.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 607.07A Page No. 20 Date of work 20 Jan '82

Corner calculated at mid-point, however unable to set as corner falls in the Washougal River. Set standard D.N.R. concrete monument and stamped brass cap in stone and concrete mound as R.M. to corner at N 1° 31' 24" E, 25.00 ft. from position 6 ft. +/- North of north bank of river. Shown on D.N.R. Final Map 441.

See sketch on back.



Washington Plane Coordinates: South Zone, Y 107,444.60 X 1,552,729.69  
 3rd Order Accuracy. Derived From: USC & GS 'Ells' and DNR 3-3N-4E

Pin Pointed on Photo No. Date Located at

#### SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Sept. 27, 1983

Signature M. A. Kinnaman 11977 Certificate No.



#### AUDITOR'S CERTIFICATE

Filed for record this 6th day of OCTOBER 1983 at 2:40 P.M. In Book 2/4 of MONUMENTS at page 11 at the request of Washington State Department of Natural Resources


J. M. Olson by J. New, Dep. County Auditor

LAIRD  
GORDON  
BRESSLER

20

607.07A

120-82

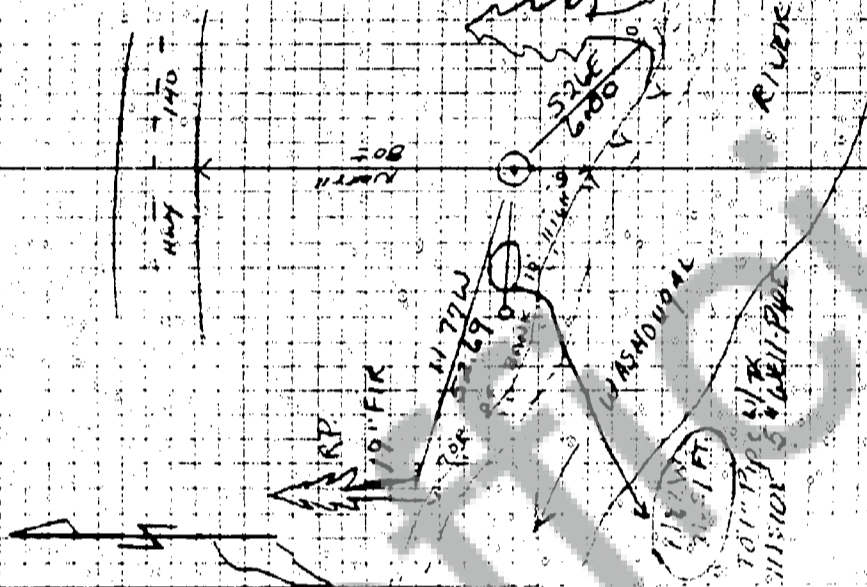

G.I.O. of 1857  
North on the East boundary Sec 36  
38.25 Washington River 175 ft. W. West  
40.00 Marked on Alder 5" for 1/4 corner  
An Alder 5" S S P E 3 L  
An Alder 6" S B 9 W 5 L

REFERENCE MONUMENT AT

E 1/4 Section 36 T 2N R 4E

Found a 1" iron pipe, 20" high, inside a  
5" pipe. Skamania County records  
indicate this pipe to be a witness  
corner, the 1/4 corner being 3 1/4' south  
in the river. No mention of any original  
evidence exists in the county records.  
Did not accept the 1" iron pipe

Set corner by single proportion  
other surveys:

571 Dept. of Gen. & Assoc. used W.C. as the 1/4 corner  
1977 Wallace & Assoc. used D.O.G.'s tie to 1" pipe

SET 3" CYL. CONE MON. W/ BRASS CAP 2"  
ABOVE MOUND OF ROCK CEMENT 6" N. OF  
TOP OF RIVER BANK. THE 1/4 CORNER IS TO SECS  
38.2N. 4E & 31.2N. 5E. FALLS IN WASHINGTON  
RIVER S. 1-31-24W. 25.00 FT. FROM MONUMENT

17.05  
16.05  
52.69