

96505

RES 20-1808(9-77)

BOOK 2/4 PAGE 15

LAND CORNER RECORD

T 2 N, R 4 East, W.M. ~~Skamania~~ Clark County
 Segregated Surveys: Corner Code No. V-23
 Name: n/a Corner No. n/a
 DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

Originally set by John Truten during 1857 G.L.O. survey. Restored with 2" pipe with plug, date and by whom set unknown and in 1971 Dept. of Game set a concrete monument by proportioning from Fred Law's 3/4" pipe 1/2 mile west. In 1977, Wallace & Assoc. used Dept. of Game monument as shown in Book 7 page 106. In 1978, Alpha Engineers calculated a corner position as shown in Book 10 page 199.

2. Description of Evidence Found:

Above mentioned 2" pipe with plug at N 46 W, 26.13 ft. from corner position. Not accepted this survey.
 Above mentioned Dept. of Game concrete monument at N 88 E, 8.47 ft. from corner position. Not accepted this survey.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 607.07A Page No. 19 Date of work 20 Jan '82

Set standard D.N.R. concrete monument and stamped brass cap at calculated mid-point corner position.
 Shown on D.N.R. Final Map 441.
 See sketch on back.

Washington Plane Coordinates: South Zone Y 110,127.40 X 1,550,143.68
 3rd Order Accuracy. Derived From: USC & GS 'Ells' and DNR 3-3N-4E

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Sept. 27, 1982

Signature M. A. Kinnaman Certificate No. 11977



AUDITOR'S CERTIFICATE

Filed for record this 6TH day of OCTOBER 1983 at 2:55 P.M. In Book 2/4 of MONUMENTS at page 15 at the request of Washington State Department of Natural Resources

J. M. Olson by J. Davis, Dep.
 County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

GLO of 1857

40.48 Set Post

4 H Fir Stk 20" S20W 75L 49.50'

1 Fir Stk 20" N45E 53L 34.98'

N 1/4 corner Sec 36 T2N R4E

FOUND NO ORIG. EVIDENCE

Find 2" pipe w/plug at N46°W 26.13N
from calculated position. NOT ACCEPTED

NOT able to determine origin

Find Game Department Conc. Mon. at


N88°E 8.47 feet from calculated position

NOT ACCEPTED. In 1971 O.D.G. proportions

this corner using lands 3/4" pipe 1/2 mile west.

In 1979 Alpha Engr. calc. their own corner book 10 pg 199.

In 1977, Wallace & Assoc. used D.O.G. mon. book 7 pg 106

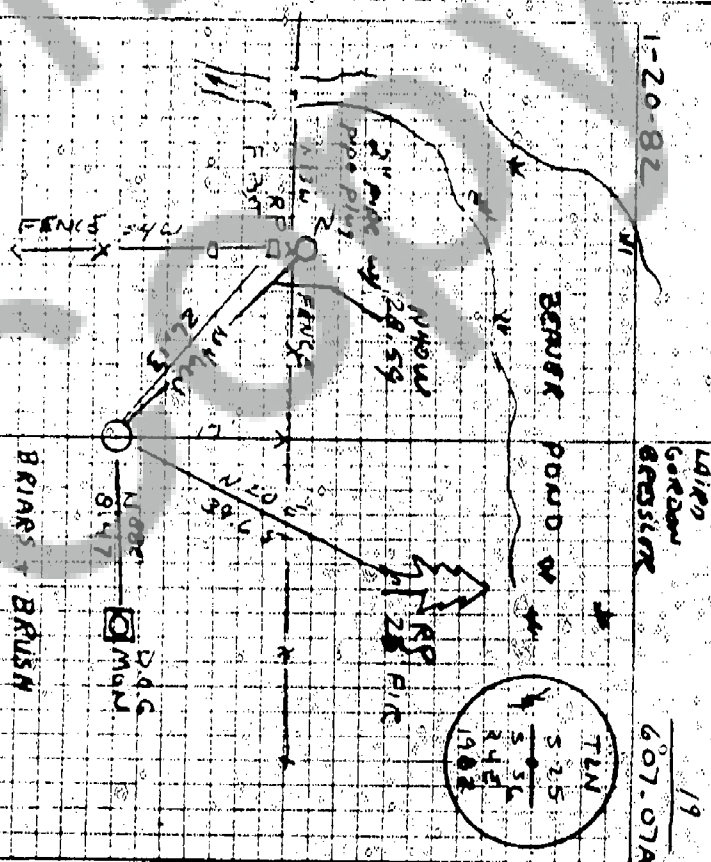

SET 3" SCL. O.D.G. CONC. MON. w/ BRASS
CAP 4" ABOVE GROUND 110' BRASS PLATE
BEHIND TOWN 75-80' N. of CORNER