

RES 20-1808(9-77)

LAND CORNER RECORD

T. 2 N, R. 4 East, W.M. : Skamania Clark County
 Segregated Surveys: Corner Code No. V-21
 Name: n/a Corner No.: n/a
 DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

Originally set by John Truten during 1857 G.L.O. survey. Restored with 3/4" iron pipe set by Fred Law in 1962 from corner 1 mile west. Pipe replaced by John Lawson, L.S. 11989, in 1981 with 2-1/2" iron pipe. In 1938, B.P.A. found 1-1/2" pipe. In 1949, Hwy. Dept. found 1-1/2" pipe. In 1962, Bert Mason used 3/4" pipe. In 1977, Wallace & Assoc. used 3/4" pipe. (See Book 7 pg. 106) In 1979, Alpha Engineers used 3/4" pipe. (See Book 10 pg. 199)

2. Description of Evidence Found:

Above mentioned 2-1/2" iron pipe and stamped brass cap. 3/4" x 36" iron pipe laying alongside Lawson monument.
 1-1/2" iron pipe at N 88 W, 125.66 ft. from Lawson monument. Not accepted this survey.

Accepted corner.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 607.07A Page No. 50 Date of work 19 Jan '82

Shown on D.N.R. Final Map 441.
 See sketch on back.

Washington Plane Coordinates: South Zone, Y 110,179.03 - X 1,547,487.71 -
 3rd Order Accuracy. Derived From: USC & GS 'Ells' and DNR 3-3N-4E

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Sept. 27, 1983

Signature

1977
 Certificate No.




AUDITOR'S CERTIFICATE

Filed for record this 6th day of OCTOBER 1983 at 3:00 P.M. In Book 2/4 of MONUMENTS at page 17 at the request of Washington State Department of Natural Resources

J.M. Olson by J. Davis, Dep.
 County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

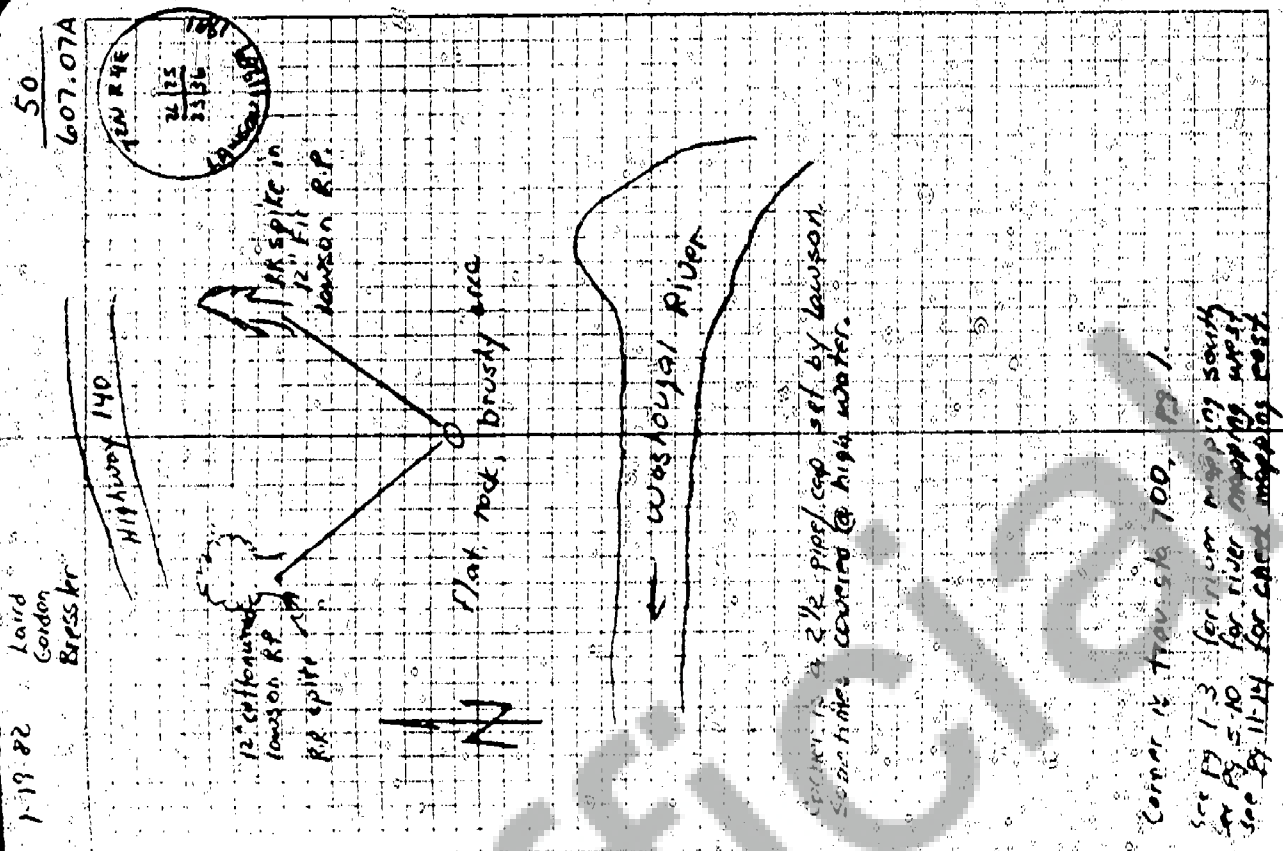

610 survey of 1897
 7700 Foot of descent & intersect Washington River
 7800 Across river
 8000 Set a post
 Balm gilead 3" SW 696"
 Willow 4" NW 78W 30L
 Alder 3" N 42E 15L
 Alder 4" SPIE 56L
 Section Corner 25/36 7 2N R 4E
 found 2 1/2" iron pipe w/ brass cap in mound of conc. set by J. Lawson. Pipe sticks up 11". A 3 1/2" x 36" iron pipe is lying beside mound. The creek call 500 ch east. 1/5 per cent, as does the 60.50 ch foot of descent call, which is the Washington (1700) is within 15' of 610, which is within limits for an even chain call. We also found a 1 1/2" iron pipe 126' west of Lawsons pipe.
 1938 - BPA found the 1 1/2" pipe
 1949 Highway Dept. notes finding the 1 1/2" pipe
 1962 Fred Lewis set 3/4" pipe record dist from corner 1 mi west.
 1962 Bert Mason used the 1 1/2" pipe
 1971 Game Dept. used the 3/4" pipe
 1977 Wallace & Assoc. used 3/4" pipe book 7 pg 106
 1979 Alpha Engr. used 3/4" pipe book 10 pg 199
 See also LCR by Lawson on file w/ Clark Co. Public works
 1981 Lawson set 2 1/2" pipe 15' west of 3/4" pipe. book 13 pg 10