

96920

RES 20-1808(9-77)

PAGE 31

LAND CORNER RECORD

T. 3 N. R. 10 W.M. Skamania County
 Segregated Surveys: Corner Code No. J-9
 Name: n/a Corner No.: n/a
 DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

Originally set by G.L.O. surveyors, Smith and Spray, in 1875.

A 1" Iron pipe, date and by whom set is unknown. Pipe and bearing trees called by the B.P.A. in 1939.

2. Description of Evidence Found:

Above described 1" iron pipe (replaced).

30" Fir B.T. with bottom of burned face and axe marks at N 60 E, 28.5 feet.

44" Fir B.T. with visible scribing at S 47 E, 24.3 feet.

25" Fir bark collar with axe marks and burned face at S 24 W, 8.4 feet.

20" downed & rotted Fir snag at N 10 W, 31.4 feet.

(2 B.T.'s to south were switched in G.L.O. notes)

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 603.26A, Page No. 58 Date of work 10-14-82

Replaced pipe with standard D.N.R. concrete monument with stamped brass cap.

Shown on D.N.R. Final Map # 483.

See corner diagram on reverse side.

Washington Plane Coordinates: South Zone Y 155,114.49 X 1,727,484.16
 3rd Order Accuracy. Derived From: Ties to USC & GS "Brought"

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Dec 27, 1982

Signature: M. A. Kinnaman

11977

Certificate No.



AUDITOR'S CERTIFICATE

Filed for record this 3 day of Dec 1984 at M. In
 Book 3/10 of Monument at page 37 at the request of
 M. In

Harry M. Clason
 County Auditor

G.L.O. of 1875 by Smith & Spray

20.00 CH. Set Downward Post from which

36" FIR SOW 371.2 24.42

24" FIR NGSE HTL 31.02

30" FIR SOW 13L 8.58

24" FIR N10E SIL 33.66

N.W. CORNER S. 1/4 T3N R10E

Fd 1" IP by T. Post.

44" FIR STUMP W/US. SCRIBE

547E 24.3 FT

38" FIR BACK COLLAR S 24W 8.4 FT

AXE MARK + BURNED FACE

N 60E 30" FIR STUMP 18.5

BOTTOM OF BURNED FACE + AXE MARK

20" FIR SHAG, DOWN + RAKED N10W

31.4' NO SCRIBE OR MARKS Fd.

In A39, BPA Called an iron pipe
and bearing trees


10-11/82

GORDON
CLASSEN

58

1603.26A

T3N
S 1/4
S 1/4
R10E
A39

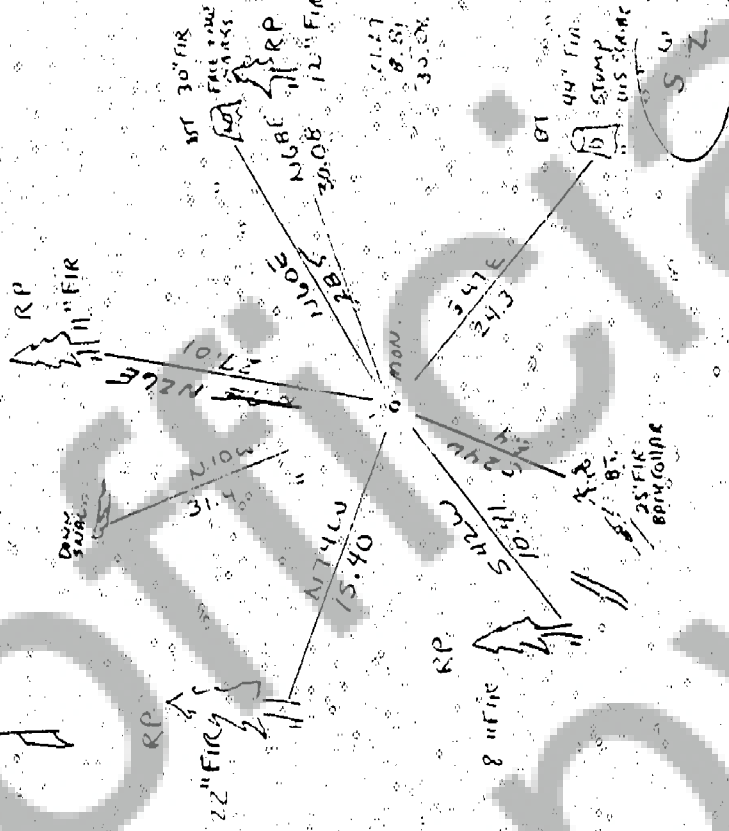

Replaced 1" ID x 18" I.P. with CONC MON
WIDEN BRASS CAP 6" ABOVE GROUND

REPOST TO ALUM NAILS 25 BT RAGS UP.