

LAND CORNER RECORD

Skamania

County

T. 3 N. R. 7 E. W.M.

Corner Code No. J-23

Segregated Surveys:

Name:

N/A

Corner No.: N/A

DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.


1. History of Corner Establishment and Subsequent Restoration:

G.L.O. survey by Jacob Richardson in 1893. Set post and two B.T.'s. Re-established by single proportion by Bert Mason in 1966. Found no evidence of original corner or bearing trees. Corner fell in old fir stump. He set iron rod 2" north of corner. D.N.R. set concrete monument witness corner in 1968.

2. Description of Evidence Found:

Found D.N.R. brass disc set in concrete.
12" fir with tag and healed over blaze, bears No. 52° W. 24.9 feet, (marked S. 40° E.)
12" white fir with D.N.R. tag and no blaze, bears N. 80° E. 21.2 feet.
18" fir with D.N.R. tag and healed over blaze, bears S. 50° E. 45 feet.
Distances to center of trees.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. _____ Page No. _____ Date of work May 18, 1984

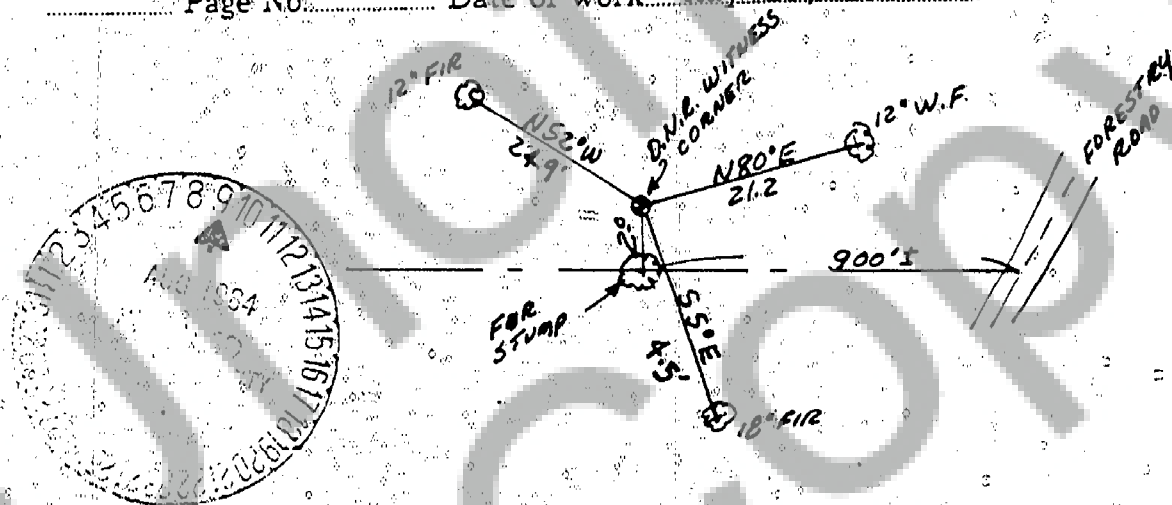

Washington Plane Coordinates: _____ Zone, Y _____, X _____

Order Accuracy. Derived From: _____

Pin Pointed on Photo No. _____ Date _____ Located at _____

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date July 31, 1984

Signature

Certificate No. 11733

98032

AUDITOR'S CERTIFICATE:

Filed for record this 9th day of AUGUST 1984 at 3:00 P.M. In Book 3/7 of MONUMENTS at page 53 at the request of

TENNESON ENGINEERING CORP.

Witnessed by d. Davis, Dep
County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

