

LAND CORNER RECORD

T 3 N, R 7 East W.M. Skamania County
Segregated Surveys: Corner Code No. A-25
Name: Recinds L.C.R. #87583 dated 14 November 1978 Corner No.: n/a
DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:


Originally set by G.L.O. surveyor, Jacob Richardson, during 1895 G.L.O. survey.
During 1903 G.L.O. Retracement survey this corner was found and reestablished by Robert F. Whitham.
In 1978, the Dept. of Natural Resources set a D.N.R. concrete monument at calculated corner position.

2. Description of Evidence Found:

Above described D.N.R. concrete monument with stamped brass cap.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 600.12 Page No. 37 Date of work 9-26-'84

Reset found D.N.R. concrete monument to newly calculated modified single proportion corner position. Date restamped on brass cap '1984'.
Shown on D.N.R. Final Map # 315.
See corner diagram on reverse side.



Washington Plane Coordinates: South Zone, Y 166,009.14, X 1,648,094.37
3rd Order Accuracy. Derived From: Ties to USC & GS Control Stations
'Greenleaf' and 'Sedum Point'.
Pin Pointed on Photo No. _____ Date _____ Located at _____

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Jan 15, 1985
Signature M. A. Kinnaman Certificate No. 11977



AUDITOR'S CERTIFICATE

Filed for record this 21st day of JANUARY 1985 at 11:50 A.M. In
Book 37 of MONUMENTS at page 25 at the request of
Washington State Department of Natural Resources

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

6" fir 582'30"W 175' L

North 78.31 found correct

1903 Retirement of 2nd Guide Medication

North 79-601 corner boons E, 40 A.K.A's distance.

Post & RT's burned down. Set a fire


past, raised mound of stone around

post, 30" base, 20" high

Township Corner	36	T 34 N	R 7 E	W. M.
	1	T 32 N		

Fond original evidence

Gordon
Bressler

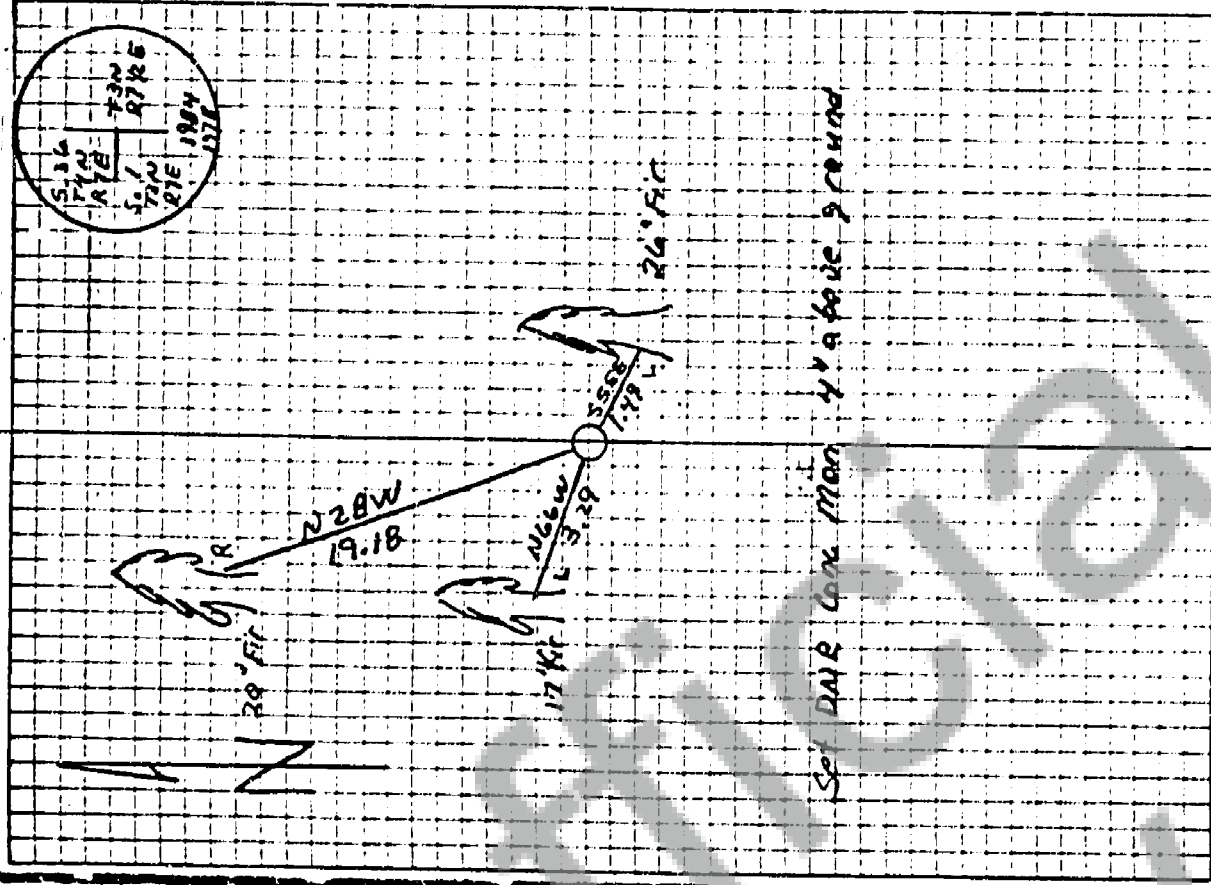

Set Date Low Mon
4 v a b o v e 3 c o u n d