

RES 20-1818 (N 01/84)
102282

BOOK 6/5 PAGE 27

State of Washington
DEPARTMENT OF NATURAL RESOURCES
BUREAU OF SURVEYS AND MAPS
LAND CORNER RECORD

1/4
33
4

Skamania County

T 6 N, R 5 E, W.M.

Corner Code No. Z-11

Segregated Surveys:
Name: n/a

Corner Number: n/a

1. History of Corner Establishment and Subsequent Restoration:

Originally established in 1909 by GLO surveyor C. Frank Rhodes with a marked stone and 1 dead BT and 1 live BT.

No subsequent restoration found.

FILED FOR RECORD
SKAMANIA CO. WASH
BY _____

Dec 1 1 28 PM '86

2. Description of Evidence Found:

- Original stone marked 1/4 (closed four).
- 26" BT stub at N81E 56 feet.
- 30" BT stub S45E 26.4 feet.
- 36" fir line tree at west, 265 feet.
- 36" fir line tree at west, 392 feet.

AUDITOR
GARY M. OLSON

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 601.07, Page No. 52. Date of work June 25, 1986.

Replaced original stone with DNR aluminum monument with stamped cap.

See reverse side for corner diagram.

SURVEYOR'S CERTIFICATE

[Seal]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date: November 18, 1986.

H. Thomas Laird Jr. Signature
21490 Certificate No.



AUDITOR'S CERTIFICATE

Filed for record this _____ day of _____ 19____ at _____ M.
In Book _____ of _____ at page _____ at the request
of Washington State Department of Natural Resources.


County Auditor

52

Gordon
McCarrison

6-25-86

1963
S 23° RSE
1/4 S 4
1986

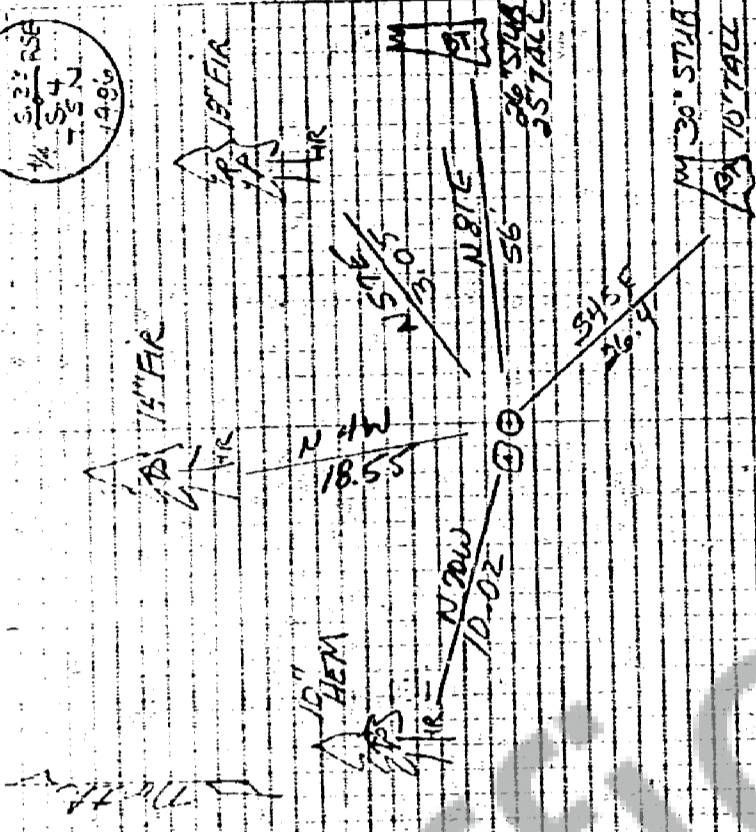

SET SID DNR ALUM MON F CAP WITH
CAP 5" ABOVE GROUND. PLACED STOOD
0.8 WEST OF MAN

See survey of 1909 Rhodes

45.00 Set sandstone, 14x9x9 with

1/4 marks on north face

24" dead fir N79 1/2 E 85 L 56.1'

26" pine S47 E 40 L 26.4'

1/4 corner $\frac{33}{4}$ T S 60 N R 5 E

FOUND 16x7x6" STONE W 1/4

ON NORTH FACE

27" STUB 36" DIA 3.5' TALL 118 E

56 FT. NO SCRIBE

27" STUB 30" DIA 10' TALL S 45 E

26.4 FT. NO SCRIBE

36" D. FIR LINE TREE 26 S' WEST

IS NOW A STUB 25' HIGH

36" D. FIR LINE TREE 39 1/2' WEST

IS NOW A STUB 10' HIGH



State of Washington
DEPARTMENT OF NATURAL RESOURCES
BUREAU OF SURVEYS AND MAPS
LAND CORNER RECORD

1/4
33
4

Skamania County

T 6 N, R 5 E, W.M.

Corner Code No. Z-11

Segregated Surveys:
Name: n/a

Corner Number: n/a

1. History of Corner Establishment and Subsequent Restoration:

Originally established in 1909 by GLO surveyor C. Frank Rhodes with a marked stone and 1 dead BT and 1 live BT.

No subsequent restoration found.

FILED FOR RECORD
SKAMANIA CO. WASH
BY TOM LAIRD

DEC 1 1 28 PM '86

2. Description of Evidence Found:

- Original stone marked 1/4 (closed four).
- 26" BT stub at N81E 56 feet.
- 30" BT stub S45E 26.4 feet.
- 36" fir line tree at west, 265 feet.
- 36" fir line tree at west, 392 feet.

of Wash. Dep.
AUDITOR
GARY M. OLSON

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 601.07, Page No. 52. Date of work June 25, 1986.

Replaced original stone with DNR aluminum monument with stamped cap.

See reverse side for corner diagram.

SURVEYOR'S CERTIFICATE

[Seal]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date: November 18, 1986.

H. Thomas Laird Signature
21490 Certificate No.



AUDITOR'S CERTIFICATE

Filed for record this _____ day of _____ 19____ at _____
In Book _____ of _____ at page _____ at the request
of Washington State Department of Natural Resources.

County Auditor