

103620

BOOK 6/5 PAGE 33

State of Washington
DEPARTMENT OF NATURAL RESOURCES
BUREAU OF SURVEYS AND MAPS
LAND CORNER RECORD

 $\frac{1}{4}$
22 | 23

Skamania County

T 6 N, R 5 E, W.M.

Segregated Surveys:

Name: n/a

Corner Code No. P-17

Corner Number: n/a

1. History of Corner Establishment and Subsequent Restoration:

Originally establish in 1909 by GLO Surveyor C. Frank Rhodes with a marked stone and 2 BTs.

2. Description of Evidence Found:

Stone with "1/4" marked on west face.
35" dead fir BT at S32E 110 feet, healed over face.
36" live fir BT at S15W 92.4 feet with visible scribing.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location.
Diagram corner and indicate meridian and reference to map of record. Surveyor's Field
Book No. 601.07A, Page No. 30. Date of work July 27, 1987.

Corner is the original GLO stone.

See reverse side for sketch.

SURVEYOR'S CERTIFICATE

This corner record correctly represents work
performed by me or under my direction in compliance
with the provisions of Chapter 50, Laws of 1973.
Date: August 3, 1987.

H. Thomas Laird Jr. 21490
Signature Certificate No.

AUDITOR'S CERTIFICATE

Filed for record this _____ day of _____ 19____ at _____ M.
In Book _____ of _____ at page _____ at the request
of Washington State Department of Natural Resources.

Registered 5
Indexed, 5
Indirect 5
Filmed
Mailed

County Auditor




FILED
BY D.S.H.S.
AUG 3 2 35 PM '87
[Seal]

Evidence found:
 Stone, firmly set, 4" exposed
 with 4" on west face
 E.T. 25' Dead fir size 115'
 are marks on bark & overgrowth
 face (closed)
 B.T. 36" live fir S15W 924,
 series visible (22)

Section corner 2243, T4N, R5E.

G.L.O. of 1909, Frank Rhodes
 274 2750 (tree 81, 12400)
 40.00 18x10.17 stone with 1/4
 on west face
 28" fir S31W 166 (1096)
 28" fir S15W 140 (924)
 40.50 fence Greenwood after bark

Corner is the original stone set by
 G.L.O. survey with 1/4 marked on east
 face

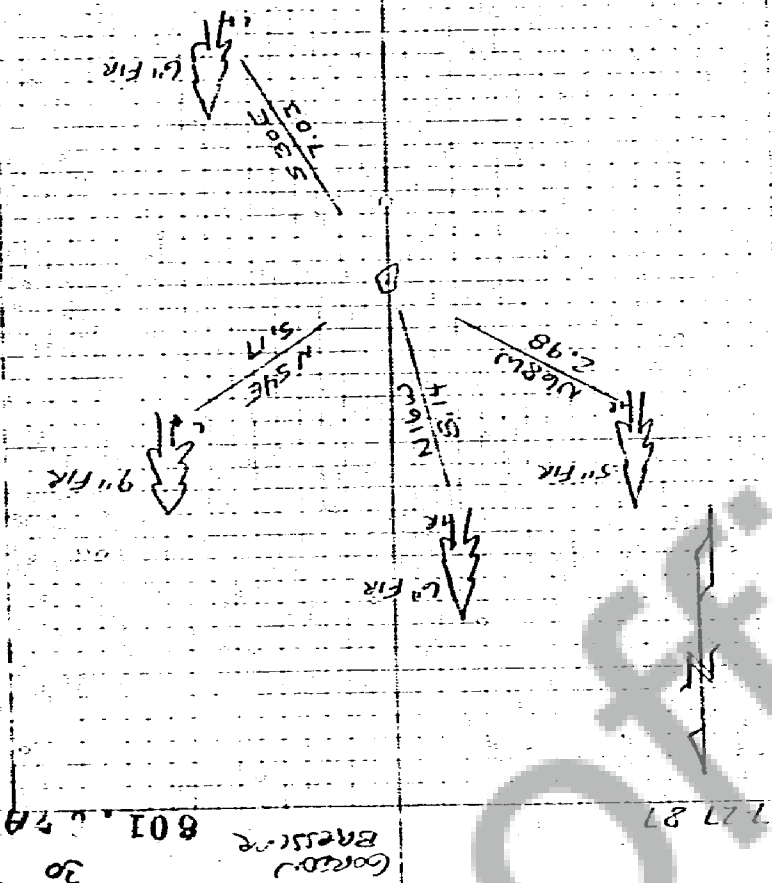

Corner
 bearing
 801.424
 30