

LAND CORNER RECORD

SKAMANIA

County

Corner Code No.

2-15

T 5 N, R 9 E, W.M.

Segregated Surveys:

Name:

Corner No.:

D.L.C. HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

CORNER ESTABLISHED BY DEPUTY SURVEYOR JACOB RICHARDSON UNDER HIS CONTRACT No. 383, OCTOBER 1892, SET POST FROM WHICH BEARS:
 18" FIR, N 39° W, 121ks., MARKED "SC 1/4 S BT"
 15" FIR, S 8° 30' E, 381ks., " " "SC 1/4 S BT"

FILED FOR RECORD
 SKAMANIA CO. WASH
 BY TERRA SURVEYING


2. Description of Evidence Found:

NO REMAINS OF OLD EVIDENCE FOUND

OCT 28 9 36 AM '87
 J. N. W. O.P.
 AUDITOR
 GARY M. OLSON

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 4 Page No. 24 Date of work 7-27-87

SET STANDARD FOREST SERVICE 2 1/2" x 30"
 ALUMINUM PIPE / CAP, 24" IN THE GROUND, FROM
 WHICH BEARS:
 5/8" x 30" IRON ROD WITH PLASTIC "TERRA-LS18731" CAP,
 N 23° 00' E, 11.70 FT.
 5/8" x 30" IRON ROD WITH PLASTIC "TERRA-LS18731" CAP,
 S 49° 45' E, 4.80 FT.
 SET CARBONITE GUARD POST NEAR MONUMENT.

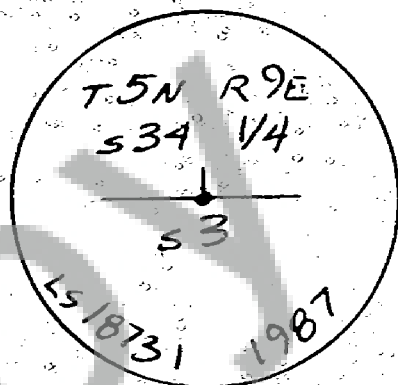

Washington Plane Coordinates: Zone, Y, X

Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 8/87

Signature

Certificate No. 18731



AUDITOR'S CERTIFICATE

Filed for record this day of 19 at M. In
 Book of at page at the request of

Registered S

Ind. x. J. ir

Indirect

Filed

Mailed

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5-2, Chapter 50, Laws of 1973.