

FILED FOR RECORD
SKAMANIA CO. WA
BY TERRA SURVEY
1987
OCT 28 10 13 AM
AUDITOR
GARY M. OLS

LAND CORNER RECORD

T 4 N, R 9 E, W.M.
Segregated Surveys:

SKAMANIA

County
Corner Code No. E-19

Name: Corner No.:
DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:
CORNER ESTABLISHED BY DEPUTY SURVEYOR JACOB RICHARDSON UNDER
HIS CONTRACT NO. 383 DATED OCTOBER/NOVEMBER 1892, SET POST FROM WHICH
BEARS:
12" FIR, S 40° W, 71 Ks, MARKED "1/4 S BT"
4" FIR, N 70° W 6 Ks, " " "1/4 S 1 BT"


2. Description of Evidence Found:
3/4" ID. x 30" GALVANIZED PIPE @ CORNER
18" HIGH CUT STUMP, BURNED, S 40° W, 4.62 FT., FACE CUT OUT, SCRIBING
VISIBLE.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Dia-
gram corner and indicate meridian, and reference to map of record. Surveyor's Field Book No.
1 Page No. 12 Date of work 4-3-87

SET STANDARD FOREST SERVICE 2 1/2" x 30" ALUMINUM MONUMENT
24" IN THE GROUND FROM WHICH BEARS:
21" O. FIR, N 89° 15' E, 321.0 FT, SCRIBED "1/4 S 2 BT"
21" O. FIR, S 50° 45' E, 210.0 FT, " " "1/4 S 11 BT"
PLACED 3/4" IRON PIPE IN HOLE ALONGSIDE
MONUMENT.

TREES HAVE RED PAINTED BANDS, TAGS, AND
BRASS WASHERS, "PLS 18731". SET CARBONITE GUARD
POST NEAR MONUMENT.

ALSO SET AN IRON ROD WITH PLASTIC CAP, "LS 18731",
ON EACH OF THE TWO NEW BT BEARINGS @ 10.0 FT
FROM THE MONUMENT.

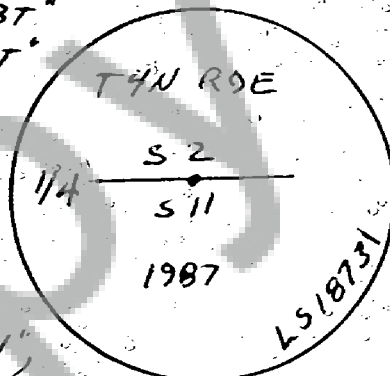

Washington Plane Coordinates: Zone, Y, X
Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or
under my direction in compliance with the provisions of Chapter
50, Laws of 1973. Date 8/87

Signature: [Signature] Certificate No. 18731



AUDITOR'S CERTIFICATE

Filed for record this day of 19 at M. In
Book of at page at the request of

County Auditor

Registered S
Ind. x.d. Sir
Filed
Mailed