

LAND CORNER RECORD

T. 4 N. R. 9E W.M.
Segregated Surveys:

SHAMANIA

County

Corner Code No. A-21

Name:

Corner No.:
D.L.C., HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

CORNER ESTABLISHED by DEPUTY SURVEYOR JACOB RICHARDSON
UNDER CONTRACT NO 383, DATED OCTOBER / NOVEMBER, 1892
SET POST FROM WHICH BEARS:
7" FIR, 512-30E, 40 LKS MARKED "TAN R9E S1BT"
6" FIR, 553-30W, 5 1/2 LKS MARKED "TAN R9E S2BT"
6" FIR, N14-45W, 13 1/2 LKS MARKED "TAN R9E CC S1+2BT"

2. Description of Evidence Found:

NO REMAINS OF GLO EVIDENCE FOUND
FOUND OLD FENCE BTH 70' ± NORTH
AND 75' ± WEST.

FILED FOR RECORD
SHAMANIA CO. WASH
BY TERRA SURVEYING

APR 14 11 32 AM '88

J. Pub. Dep
AUDITOR

GARY M. OLSON

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

10 Page No. 8 Date of work 7-87

SET STANDARD FOREST SERVICE 2 1/2" X 30" ALUMINUM
PIPE WITH CAP, 24" IN GROUND FROM WHICH BEARS:

13" WHITE FIR N57-30W, 40.0' scribed "S36BT"


15" DOUG FIR S23-15W, 27.8' scribed

"S2CCBT"

26" DOUG FIR, S43-30E, 44.4' scribed

"S1CCBT"

TREES HAVE RED PAINTED BAND
TAGS AND BRASS WASHER "PLS18731"
SET CAVONITE GRAD POST ALONG
SIDE MONUMENT

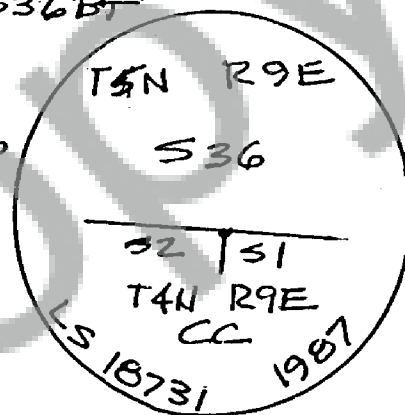

Washington Plane Coordinates:

Zone, Y

X

Order Accuracy. Derived From:

Pin Pointed on Photo No.

Date

Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or
under my direction in compliance with the provisions of Chapter
50, Laws of 1973. Date 12, 1988

Signature

Certificate No. 18731

[SEAL]



AUDITOR'S CERTIFICATE

Filed for record this

day of

19

at

M. In

Book

of

at page

at the request of

Prepared S

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2),
Chapter 50, Laws of 1973.