

LAND CORNER RECORD

T. S. N. R. 9E, W.M. County
Segregated Surveys: Corner Code No. 2-21
Name: Corner No.:
D.L.C., H.R.S., Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:
CORNER ESTABLISHED BY DEPUTY Surveyor JACOB RICHARDSON UNDER CONTRACT NO 383, OCTOBER, 1892, SET POST FROM WHICH BEARS:
9" MAPLE, N 38-30E, 43 LKS, SCRIBED T5N, R9E, S 36 BT.
20" FIR, N 23-30W, 23 LKS, SCRIBED T5N, R9E, S 35 BT
10" FIR, S 56-30W, 9 LKS, SCRIBED T5N, R9E, S 35+36 BT

2. Description of Evidence Found:
20" Doug FIR, NW 35" IN GOOD Condition WITH VISIBLE BLAZE
OTHER BTS GONE.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 14 Page No. 14 Date of work 4-6-87


SET STD. FOREST SERVICE 2 1/2" X 30" ALUMINUM PIPE & CAP, 34" IN THE GROUND FROM WHICH BEARS:

35' Doug FIR N 23-30W, 15.18' WITH HEALED GLO BLAZE

32" Doug FIR N 83-30E, 10.53', SCRIBED S 36 S 36 BT

15' HEMLock S 8-30E, 54.10', SCRIBED T4N S2 BT

TREES HAVE RED PAINTED BANDS, TAGS AND BRASS WASHERS "PLS 18731". SET CAWSONITE POST NEAR MONUMENT

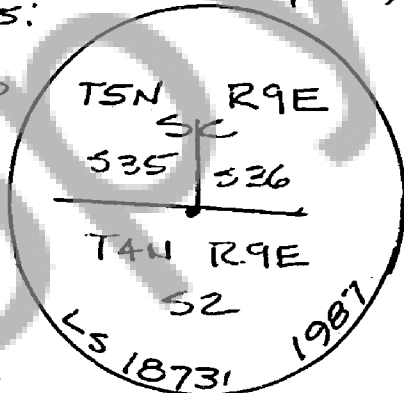

Washington Plane Coordinates: Zone, Y, X
Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date APRIL 19, 1988

Signature: [Signature] Certificate No. 18731



AUDITOR'S CERTIFICATE

day of 19 at M. In
of at page at the request of

County Auditor

FILED FOR RECORD
SKAMANIA CO. WASH
BY TERRA
APR 14 12 08 PM '88
AUDITOR
GARY M. OLSON