

# LAND CORNER RECORD

SKAMANIA

County

T 5 N, R 9 E, W. 1.  
Segregated Surveys:

Corner Code No. 2-25

Name:

Corner No.:

D.L.C. RES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite

### 1. History of Corner Establishment and Subsequent Restoration:

CORNER ESTABLISHED BY DEPUTY SURVEYOR JACOB RICHARDSON UNDER CONTRACT NO 383, OCTOBER, 1892. SET POST FROM WHICH BEARS:  
10" FIR, N58E, 23 LKS SCRIBED "TSN R10E S31BT"  
10" FIR, N9W, 58 LKS SCRIBED "TSN R9E S36BT"  
5" FIR, S64E, 4 LKS SCRIBED "SC TSN R9 & 10E BT"


### 2. Description of Evidence Found:

10" Doug FIR, Now 38" N58E, 54.78' WITH HEALED BLAZE  
10" Doug FIR, Now 36", N9W, 38.28' WITH HEALED BLAZE.

### 3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

4 Page No. 12 Date of work 3-31-87

SET STANDARD 2 1/2" X 30" ALUMINUM PIPE & CAP  
24" IN GROUND IN A 2' X 2' X 6" MOUND  
OF STONE, FROM WHICH BEARS:  
34" DOUG FIR N24-45W, 36.90', SCRIBED  
"S36 SC BT"  
29" DOUG FIR S72-45E, 62.50' SCRIBED  
"S1 BT"

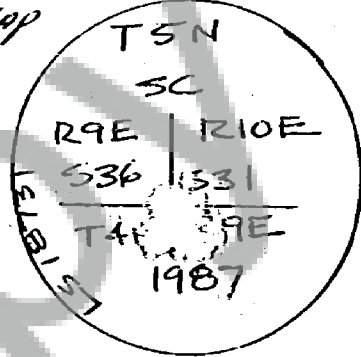

Trees HAVE RED PAINTED BAND, TAGS  
AND BRASS WASHER "PLS 18731" SET CARBONITE  
POST NEAR MONUMENT


Washington Plane Coordinates: \_\_\_\_\_ Zone, Y \_\_\_\_\_, X \_\_\_\_\_  
Order Accuracy. Derived From: \_\_\_\_\_

Pin Pointed on Photo No. \_\_\_\_\_ Date \_\_\_\_\_ Located at \_\_\_\_\_

### SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date April 12, 1988

Signature Roy O. Gaylord Certificate No. 18731



### AUDITOR'S CERTIFICATE

I have received this \_\_\_\_\_ day of \_\_\_\_\_ 19 \_\_\_\_\_ at \_\_\_\_\_ M. In \_\_\_\_\_ of \_\_\_\_\_ at page \_\_\_\_\_ at the request of \_\_\_\_\_

County Auditor

FILED FOR RECORD  
SKAMANIA CO. WASH  
BY TERRY  
SURVEYOR

APR 14 12 23 PM '88

AUDITOR  
GARY H. SON