

RIS 20-1808(9-77)

LAND CORNER RECORD

T 4 N, R 9 E, W.M. County SKAMANIA
 Segregated Surveys Corner Code No. R-17
 Name S.E. COR. SEC. 22 Corner No.:
 D.L., T.P.S., Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite

1. History of Corner Establishment and Subsequent Restoration:

CORNER ESTABLISHED BY JACOB RICHARDSON UNDER CONTRACT # 383 IN 1892.
 SET CORNER POST FROM WHICH BEARS,

48" FIR N42°E 75 LKS MARKED T4N R9E S23 BT
 60" FIR 379°E 22 " " T4N R9E S26 BT
 36" FIR 538°W 14 " " T4N R9E S27 BT
 42" FIR N40°W 88 " " T4N R9E S22 BT

RESTORED BY BROUGHTON LBR. CO. WITH 1 1/4" IN 1904
 D.N.R. SET MON. IN 1977

TRANSON SURVEYING TIED TO COR. IN 1987

2. Description of Evidence Found:

COR. - D.N.R. CONC. MON. 2" ABOVE GROUND, MARKED
 AXLE LAYING NEAR COR.
 6" ORANGE PLASTIC POST W/ 54-9 4' SOUTH

BT - 48" D. FIR STUMP N42°E 49.30' W/ D.N.R. BT TAG
 POSSIBLE OLD FACE

BT - 60" D. FIR SNAG 379°E 15.42' W/ D.N.R. BT TAG
 NO ORIG. MARKS.


RP - 24" D. FIR STUMP 558°W 6.87' W/ D.N.R. TAG
 4 BROUGHTON LBR. CO. TAG

R.P. - 44" D. FIR SNAG N4°E 14.59' W/ D.N.R. TAG

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

1. Page No. 2 Date of work 9-8-88

CORNER USED AS PART OF A
 SURVEY FOR U.S.F.S. AND
 FILED WITH SKAMANIA COUNTY

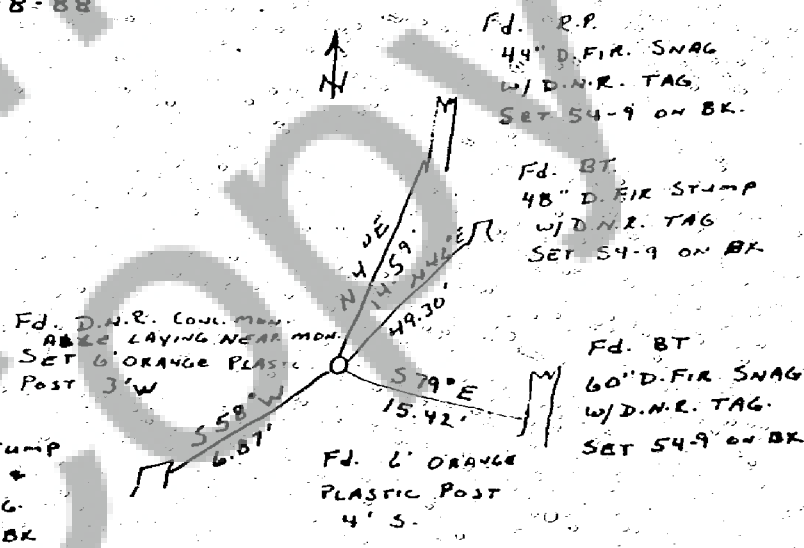

Washington Plane Coordinates: Zone, Y
 Order Accuracy Derived From: X

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or
 under my direction in compliance with the provisions of Chapter
 50, Laws of 1973. Date 10-26-88

Signature Frederick L. Martin

10785
 Certificate No.



AUDITOR'S CERTIFICATE

Filed for record this day of 19 at M. In
 Book of 5 at page at the request of

2-3-89

County Auditor