

102283

State of Washington
DEPARTMENT OF NATURAL RESOURCES
BUREAU OF SURVEYS AND MAPS
LAND CORNER RECORD

33	34
4	3

Skamania County

T 6 N, R 5 E, W.M.

Corner Code No. Z-13

Segregated Surveys:

Corner Number: n/a

Name: n/a

1. History of Corner Establishment and Subsequent Restoration:

Originally established in 1909 by GLO surveyor C. Frank Rhodes with a notched stone and 4 dead BTs.

Recovered in 1966 by James E. Jelley, BLM. He set BLM pipe and cap and scribed 4 new BTs.

FILED FOR RECORD
SKAMANIA CO. WASH
BY TOLLETT

Dec 11 29 PM '86

2. Description of Evidence Found:

Original stone with proper notches.
BLM pipe and stamped brass cap.
30" fir stub BT at N22W 19.8, with visible scribing.
4 - 1966 BTs.

AUDITOR
GARY M. OLSON

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location.
Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 601.07, Page No. 50. Date of work June 26, 1986.

Corner is BLM pipe and stamped brass cap.

See reverse side for corner diagram.


SURVEYOR'S CERTIFICATE

[Seal]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973.
Date: November 18, 1986.


H. Thomas Laird Jr.
Signature

21490
Certificate No.




AUDITOR'S CERTIFICATE

Filed for record this _____ day of _____ 19____ at _____ M.
In Book _____ of _____ at page _____ at the request
of Washington State Department of Natural Resources.



County Auditor



GLE Survey of 1909 (Rhodes)

6-12-86

Laird
Bressler
Harris

54

Set Sandstone 15x11x9 with 4 notches
on east and 2 notches on west.

24" dead fir	N79E	38L	25.1
50" dead fir	S14E	77L	50.8
40" dead fir	S37W	10L	4.6
40" dead fir	N4W	31L	20.5

TSN
RSE
551 533
551 54
TSN
1786

Section Corner $\frac{27.133}{514}$ T56N R5E

Found 13x10x7 sandstone with all GLE notches.

Rotted remains of 24" fir @ N79E, 25'

50" fir stub, 12' high, @ S14E 51'


40" fir stump crush'd, 2 logs, @ S37W 7'

40" cut fir stump @ N4W 20'

The above measurements are to the centers.

No axe work or scribing visible.

Placed Alum log on Huffman Peak trail, which
is approx 330' east of corner

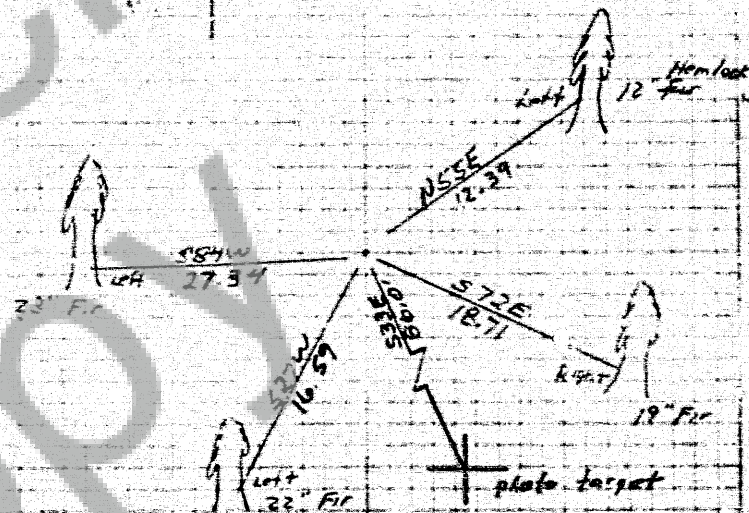

Corner is an Alum Mar. with 3" above
ground. It is set in the bucked out
portion of a 42" log. (The 50" RT broken
off and fell in corner) Set original stone
on south side of monument

26" pine 5475 40 L 26.5

1/4 corner $\frac{33}{4}$ T 54622 R 5E

FOUND 16" X 7" X 6" STONE W/ 1/4

ON NORTH FACE

BT. STUB 26' DIA 25' THICK 1281E

56 FT. NO SCRIBE

2. STUB 30" DIA 10' TALL S45E

26.4 FT. NO SCRIBE

36' D. FIR LINE TREE 265' WEST

IS NOW A STUB 25' HIGH

36' D. FIR LINE TREE 392' WEST

IS NOW A STUB 10' HIGH

6-25-76

Gordon
MacPherson

52

