

LAND CORNER RECORD

SKAMANIA

County

T. S. N. R. 9E W.M.

Corner Code No. Z-B

Segregated Surveys:

Name:

Corner No.:

DLC, HRS, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

CORNER ESTABLISHED BY DEPUTY SURVEYOR JACOB RICHARDSON UNDER CONTRACT NO 383, DATED OCTOBER/NOVEMBER, 1892. SET POST FROM WHICH BEARS:
 6" FIR, N42-30E, 37 LKS, MARKED "TSN R9E S34 BT"
 30" FIR, N55W, 33 LKS MARKED "TSN R9E SC 33+34 BT"
 10" FIR, S8-30W, 22 LKS " " "TSN R9E SC 33+34 BT"

2. Description of Evidence Found:

6" Doug FIR, Now 12" WINDFALL, N42-30E, 24.4'
 30" Doug FIR, Now 42", N55W, 21.78', "BT" FOUND
 10" Doug FIR, Now 16" SNAG, S8-30W, 14.52'

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record, Surveyor's Field Book No. 4 Page No. 20 Date of work 4-16-87

SET STANDARD FOREST SERVICE ALUMINUM MONUMENT WITH CAP, (2 1/2" x 30"), 24" IN THE GROUND FROM WHICH BEARS:

34" Doug FIR, N83-45E, 80.81 FT, scribed

"S34 SC BT"


32" Doug FIR, S89-30W, 40.05', scribed

"S4 BT"

42" Doug FIR N55W, 21.78' WITH GLO BLAZE.

TREES ARE PAINTED WITH RED ZING TAGS AND BRASS WASHER "PLS 18731"

SET CARBONITE GUMD POST NEAR MONUMENT.

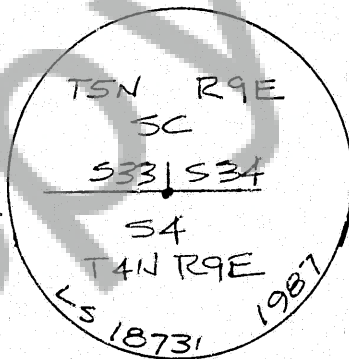

Washington Plane Coordinates: Zone, Y X

Order Accuracy. Derived From:


Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date APRIL 12, 1988

Signature

Certificate No. 18731



AUDITOR'S CERTIFICATE

Filed for record this day of 19 at M. In of at page at the request of

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

FILED FOR RECORD
 SKAMANIA CO. WASH
 BY TERRA SURVEYING
 APR 14 11 57 AM '88
 AUDITOR
 GARY H. OLSON