

113740

BOOK 2/5

PAGE 160
SKAMANIA CO. WASH
BY Bob Glaeser

JUN 16 4 05 PM '92

J. Lowry
FOR
GARY M. OLSON**LAND CORNER RECORD**

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

Corner Indexing Information:

TWP 2 North RGE 5 East Corner Code R-1
(Willamette Meridian)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

Northwest Corner Section 30, Township 2 North, Range 5 East, Willamette Meridian

REG.	
INT.	
INDEXED	
FILED	6/24/92
MAILED	


Skamania County Washington:

AUDITOR'S USE

Land Surveyor Information: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under by direction in conformance with the Survey Recording Act.

Company or agency:
Minister & Glaeser Surveying, Inc.
2208 E. Evergreen Blvd.
Vancouver, WA. 98661
(206) 694-3313

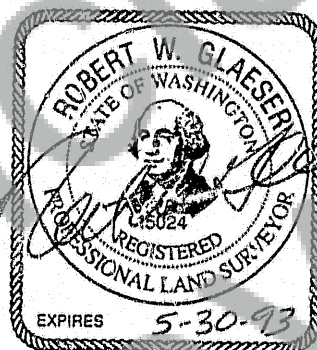

Signature [Signature] Date: 6-15-92 Seal:

Washington Plane Coordinates: N:
Order: Zone:

E:
Datum (Date of adjustment):

Corner Information: Use the space below to provide the following information regarding the corner.

(1) Pertinent Corner History:

The original survey was conducted by Deputy Surveyor John Trutch, under Contract No. 24, dated February 21, 1857. The survey was performed between April 9 and June 24, 1857. Set corner common to Sections 19, 24, 25, and 30 at 80.00 chains North of the Southwest corner to Section 30.

B.T.'s were as follows:

10" Dia. Fir, S. 28° E., 57 Links
60" Dia. Fir Stub, N. 30° W., 59 Links
30" Dia. Fir Stub, N. 48° E., 1.36 Links
20" Dia. Fir Stub, S. 72° W., 81 Links

(2) Evidence Found at the Corner:

No original evidence found. Found 3/4" iron pipe with brass cap along with R.P.'s as found in Skamania County Survey Book 1, Page 196. The 3/4" iron pipe with brass cap was accepted as the corner based on reputation and use.

(3) Corner Perpetuation Information:
Corner is shown on the following Clark County Maps
of Record.

Surveys

Subdivisions

Short Plats

Unofficial
Copy

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE
BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C		6			5			4			3			2			1								
D																									
E																									
F																									
G		7			8			9			10			11			12								
H																									
J																									
K																									
L		18			17			16			15			14			13								
M																									
N																									
O																									
P		19			20			21			22			23			24								
Q																									
R																									
S																									
T		30			29			28			27			26			25								
U																									
V																									
W																									
X		31			32			33			34			35			36								
Y																									
Z																									

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: