

116205

FILED FOR RECORD
SKAMANIA CO. WASH
BY *Robert Glaeser*

May 11 2 57 PM '93

ADDITIONAL
GARY M. OLSON**LAND CORNER RECORD**

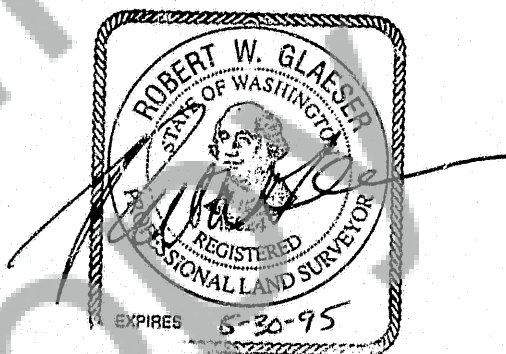
BOOK 135 PAGE 235

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY
OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT
TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON
THE BACK.)

Registered	
Indexed, Dir	<i>p</i>
Indirect	<i>p</i>
Filed	
Mailed	

Corner Indexing Information:TWP 1N RGE 6E Corner Code A-5
(Willamette Meridian)ADDITIONAL IDENTIFIER: (e.g., BLM designation
for the corner, street intersection, plat name,
block, lot, etc.)Northwest corner of Section 5, Township 1 North, Range 6 East,
Willamette Meridian.Skamania County Washington:

AUDITOR'S USE

Land Surveyor Information: (or Public Officer as per RCW 58.09.050)This corner record correctly represents work performed by me or
under by direction in conformance with the Survey Recording Act.Company or agency:
Minister & Glaeser Surveying, Inc.
2208 E. Evergreen Blvd.
Vancouver, WA. 98661
Phone: (206) 694-3313
Fax: (206) 694-2410Signature *[Signature]* Date: 5-6-93 Seal: 18024Washington Plane Coordinates: N: _____ E: _____
Order: _____ Zone: _____ Datum (Date of adjustment): _____**Corner Information:** Use the space below to provide the following
information regarding the corner.(1) **Pertinent Corner History:** The original survey was conducted by
deputy Surveyor, Lewis Van Vleet and John Newsom under contract No.
7; dated April 29, 1859. Set a post for corner common to Sections
5, 6, 32, and 31, 80 chains East to the Northeast Section corner 5.
B.T.'s are as follows:50" Diameter Fir; North 40° East, 11 links.
48" Diameter Fir; South 25° West, 8 links.
24" Diameter Fir; South 67° East, 77 links.In August of 1969, C.E. Whitten and Gerald C. Otto (with Dept. of
Natural Resources, State of Washington) had conducted a survey and
stated:The 1918 G.L.O. brass cap was found as were the Section 31 and 6
B.T.'s (with scribing). I (C.E.W. and G.C.O.) set the monument at

the exact point for the corner and buried the iron pipe and cap alongside.

Set 3 tag reference points:

008011

B.T. 24" Fir stump, North 40° West, 13.8 feet.

B.T. 24" Fir stump, South 27° West, 15.2 feet.

B.T. 16" Fir stump, South 74° East, 24.0 feet.

Corner common to Sections 5 and 6 and 31 and 32, Township 1 North and Township 2 North, Range 6 East, Willamette Meridian.

(2) Evidence Found at the Corner: No original evidence found. Found State of Washington Department of Natural Resources concrete monument.

(3) Corner Perpetuation Information:

Surveys

Subdivisions

Short Plats

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C																									
D																									
E																									
F																									
G																									
H																									
I																									
J																									
K																									
L																									
M																									
N																									
O																									
P																									
Q																									
R																									
S																									
T																									
U																									
V																									
W																									
X																									
Y																									
Z																									

RCW 59.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: