

118211
LAND CORNER RECORD

FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL
RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:

TWP_6N RCE_5E CORNER CODE_ST = 2-3
(Willamette Meridian) (See instructions on back of form)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

CLARK COUNTY GPS DESIGNATION : 42111 S-2000 ROAD
GPS CONTROL SERIAL NUMBER : 0098
POINT ALIAS : QUARRY

COUNTY: SKAMANIA

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: CLARK COUNTY SURVEYOR'S OFFICE

ADDRESS: 1300 ESTHER STREET
SUITE 106
VANCOUVER, WA 98660

WASHINGTON PLANE COORDINATES: N: E:

THIS POINT WAS OBSERVED IN THE 1992 CLARK COUNTY
GLOBAL POSITIONING SYSTEM SURVEY. CONTACT THE
COUNTY SURVEYOR'S OFFICE FOR POSITION INFORMATION.

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

NOTE: THIS DOCUMENT IS BEING RECORDED IN BOTH CLARK AND SKAMANIA COUNTIES. THE CLARK COUNTY VERSION IS INDEXED IN TEN RCE.

THE POINT IS A 2-1/2 INCH DIAMETER BRASS DISK STAMPED "CLARK COUNTY CONTROL POINT 42111 1992" SET INTO A 3/4 INCH IRON PIPE IN THE TOP OF A CONCRETE MONUMENT FLUSH WITH THE SURFACE AT THE NORTHEASTERN EDGE OF A WIDE TURNOUT AND OUTSIDE OF A SWITCHBACK IN ROAD S2000 OPPOSITE A ROCK BORROW PIT. THE STATION IS IN THE SE 1/4 NW 1/4 SECTION 30 TOWNSHIP 6 NORTH RANGE 5 EAST WILLAMETTE MERIDIAN.

THE STATION IS ABOUT 6 MILES SOUTHEAST OF COUGAR. TO REACH THE POINT FROM THE COUGAR STORE:

- * GO EAST ON SR-503 SPUR (USFS 90) 3.0 MILES TO THE JUNCTION WITH INTERNATIONAL PAPER (I.P.) ROAD NO. 10 AT APPROX. MILEPOST 39.6.
- * GO RIGHT (SOUTHWEST AND WEST) ON ROAD 10 0.2 MILES TO THE BRIDGE OVER SWIFT CREEK AND THE LINE BETWEEN COWLITZ AND CLARK COUNTIES.
- * BEAR LEFT (SOUTH AND EAST) AT THE END OF THE BRIDGE, CONTINUING ON ROAD No. 10 0.4 MILES TO ROAD S6000.
- * GO RIGHT (SOUTH) ON S6000 4.7 MILES TO S1000 IN A SADDLE AT MILE POST 5.
- * CONTINUE SOUTH ON S1000 4.1 MILES TO BRIDGE OVER N. FORK SIOUXON RIVER.
- * CONTINUE SOUTH ON S1000 0.7 MILES TO S2000.
- * GO LEFT (NORTHEAST) ON S2000 1.4 MILES TO SWITCHBACK TO RIGHT AND QUARRY.

ALTERNATIVELY, FROM THE INTERSECTION OF STATE ROUTE 503 (NE YALE BRIDGE ROAD) AND NE HEALY ROAD IN THE TOWN OF CHELATON: GO EAST AND NORTH ON HEALY ROAD AND USFS 54 6.5 MILES TO MILE POST 30.5 AND YELLOW GAYE ACROSS ROAD 8050 ON THE LEFT.

- * GO LEFT (EAST AND NORTH) ON 8050 1.1 MILES TO 8050C.
- * GO LEFT (NORTH) ON 8050C 1.1 MILES TO S1000.
- * GO RIGHT (EAST) 1.8 MILES TO BRIDGE OVER SIOUXON CREEK.
- * CONTINUE NORTH ON S1000 0.3 MILES TO S2000.
- * GO RIGHT (NORTHEAST) ON S-2000 1.4 MILES TO THE STATION.

SEE REVERSE FOR SKETCH AND REFERENCE POINTS.

BOOK 740 PAGE 150


FILED FOR RECORD
SKAMANIA CO. WASH
BY David Hills
Clark Co. Surveyor
Dec 10 4 43 PM '93
P. Lowry
AUDITOR
GARY M. OLSON

AUDITOR'S USE



SEAL/SIGNATURE/DATE


Registered
Indexed, Dir
Indirect
Filmed
Mailed

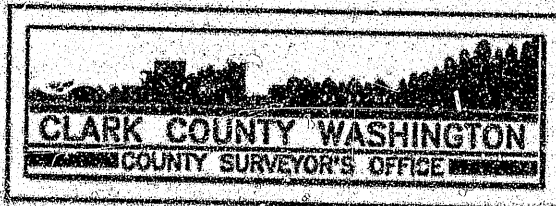

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:
(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

- (a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.
(2) For corners that are not located at the intersection of two lines (Header corners, DLC's, HES's, reservation boundaries, mining claims, etc.):
(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.
(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated HH-4-5.

BOOK 140 PAGE 151

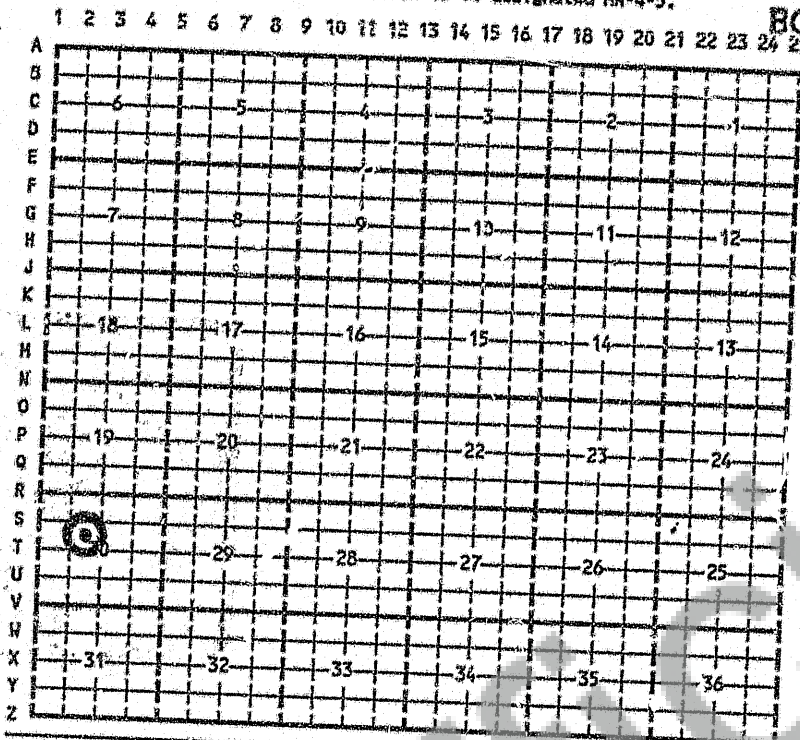

RCM 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

GPS CONTROL PT. #98

42111 RD. S-2000 (ONE)

FOUND 3" BRASS DISC 7' ± FROM (TOP OF BANK) (TOPOGRAPHIC)
TURNOUT @ GRD. LEVEL W/STL POST
+ B.T. TAG 20° ±, N 30° W

RP#1 FND. 5" IR W/RED CLARK Co. CAP 7' ±
FROM TOP OF BANK
N 38° W; 92' ±
W/STL POST + B.T. TAG

RP#2 FND. 5" IR W/RED CLARK Co. CAP
4' ± FROM TOP OF BANK
S. 22° E; 30' ±
W/STL POST + B.T. TAG

RP#3 FND. 5" IR W/RED CLARK Co. CAP
5' ± W OF RD. EDGE + 5' ± S. OF
HP 1/2 S 32° W; 102' ±
W/STL POST + B.T. TAG

3-18-93

HAND COMPASS:
200' STL. CAN.

ANDREWS
FARNESS

