

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:

TWP 3 N. RGE 7 E. W.M. J-17
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

118502

BOOK 140 PAGE 861

COUNTY: Skamania


AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: Tenneson Engineering Corporation

ADDRESS: 409 Lincoln Street, The Dalles, Oregon 97058



WASHINGTON PLANE COORDINATES: N:

E:

ORDER:

ZONE:

DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

1. (a) G.L.O. survey by Jacob Richardson in 1893, set post for corner
 - A maple 9" diameter bears N. 47° E., 570 lks. dist.
 - A fir 48" diameter bears S. 50° W., 22 lks. dist.
 - A maple 4" diameter bears S. 28° E., 14 lks. dist.
 - A fir 8" diameter bears N. 52° W., 8 lks. dist.
- (b) In July, 166, Bert Mason, L.S. 5266, under joint survey agreement between Crown Zellerbach and D.N.R. recovered original B.T. and reset corner
 - A fir snag, 48" diameter, bears S. 50° W., 22 lks, dist. with catface and notch
 - A fir 8" diameter bears S. 58° W., 14.2'
 - A fir 6" diameter bears N. 86° W., 12.5'
 - A fir 9" diameter bears N. 32° E., 3.75'
 - A fir 8" diameter bears S. 45° E., 20.6'
- (c) In 1966, D.N.R. set concrete monument
2. Found D.N.R. concrete monument
 - Found 16" fir with healed blaze, N. 32° E., 3.8'
 - (Set R.P. spike in root crown, N. 32 1/2° E., 2.77')
 - Found 16" fir with healed blaze, S. 45° E., 20.6'
 - (Set R.P. spike in root crown, S. 45 1/2° E., 19.37')
 - Found 14" fir with healed blaze N. 86° W., 12.5'
 - (Set R.P. spike in root crown N. 89° W., 11.30')
 - Found 14" fir with healed blaze, S. 58° W., 14.2'
 - Found 48" fir snag S. 50° W., 14.5'
 - Set steel fence post North 2.0'

Registered	<input checked="" type="checkbox"/>
Indexed, Ur	<input checked="" type="checkbox"/>
Indirect	<input checked="" type="checkbox"/>
Filmed	<input type="checkbox"/>
Matted	<input type="checkbox"/>

NOTE: Survey and BT ties basis of bearing is Washington State Coordinate System, South Zone Grid.

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:


(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

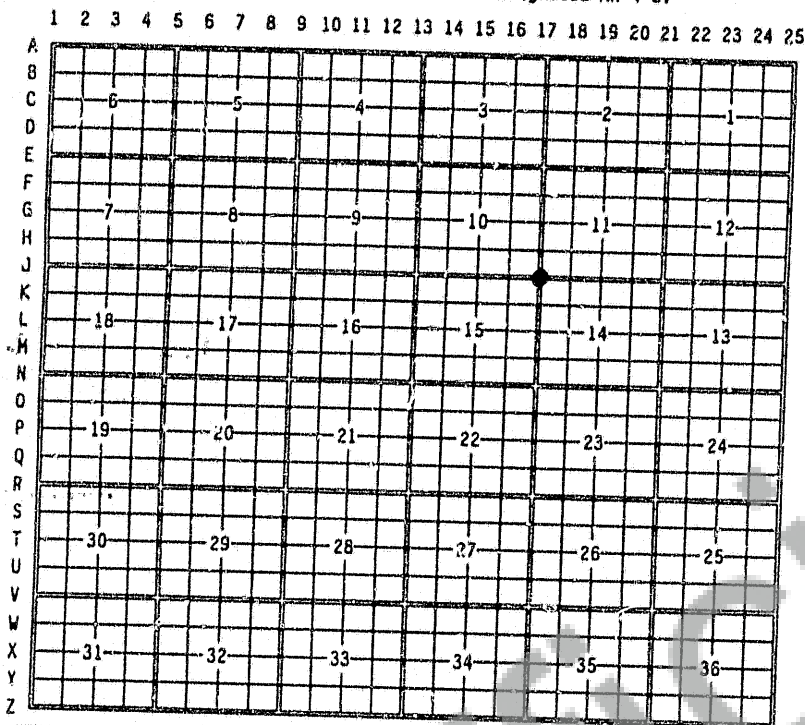

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: