

122177
LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.03. ALPHA-KINEMATIC INDEX DIAGRAM ON THE BACK.)

BOOK 144 PAGE 550

FILED FOR RECORD
SKAMANIA CO. WASH
BY *Terry Trantow*

CORNER INDEXING INFORMATION:

TWP 3N RGE 9E
(Willamette Meridian)

CORNER CODE V-15

(See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLK designation for the corner, street intersection, plat name, block, lot, etc.)

1/4 corner between Sections 27 & 34

Apr 27 4 47 PM '95
Gary Olson
AUDITOR
GARY M. OLSON

COUNTY: SKAMANIA

AUDITOR'S USE

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.080)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: TRANTOW SURVEYING, INC.

ADDRESS: PO BOX 287 - 412 W. JEFFERSON
BINGEN, WA 98605-0287
509 / 493-3111



WASHINGTON PLANE COORDINATES: N: 140203.88

E: 1703814.80

ORDER: third

ZONE: SOUTH DATUM (Date of adjustment): 1927-U.S.E.-Bonneville

CORNER INFORMATION: Use the space below to provide the following information regarding the corner:
(1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

GLO in 1879 marked a 6" fir for this corner from which bears:

4" fir, S35W, 17 links (11.22 feet)

4" fir, North, 15 links (9.90 feet)

U.S. Engineers in the Bonneville Project set this corner circa 1937 marked with a brass cap.


The 1909 plat of COOKS used this corner as a plat corner, with no relevant information provided.

A 1978 survey of the Plat of Cooks recovered the USE monument, at the coordinates provided.

2. Found a 3½" USE brass cap set in a 9" concrete block, marked as shown
3. From the monument bear the following:
 - 16" D-fir, S88W, 25.35 ft. to nail at center of tree scribed WT, tagged
 - 18" D-fir, S09W, 21.80 ft. to nail at center of tree scribed WT, tagged
 - 6" maple, N19E, 8.11 ft. to nail at center of tree scribed WT, tagged

6" RM WT

S 88W
16" DF WT 25.35

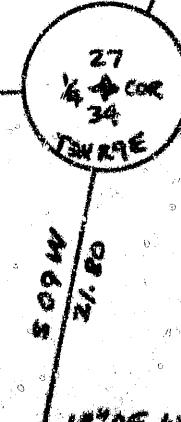

Mag. Dist = 223° E Date of work 4/10/1995

DATE OF FORM: 2/92

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER SIDE BLANK ON THE OTHER SIDE:
(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

- (a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.
- (2) For corners that are not located at the intersection of two lines (Meander corners, GLC's, MES's, reservation boundaries, mining claims, etc.):
 - (a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.
 - (b) for corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

A																									
B																									
C	6		5		4		3		2		1														
D																									
E																									
F																									
G	7		8		9		10		11		12														
H																									
J																									
K																									
L	18		17		16		15		14		13														
M																									
N																									
O																									
P	19		20		21		22		23		24														
Q																									
R																									
S																									
T	30		29		28		27		26		25														
U																									
V																									
W																									
X	31		32		33		34		35		36														
Y																									
Z																									

RCM 58.09.000 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

ISSUED