

124687  
**LAND CORNER RECORD**

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.08. ALPHABETIC INDEX DIAGRAM ON THE BACK.)

BOOK 155 PAGE 777

FILED FOR RECORD  
 SKAMANIA CO. WASH  
 BY Olson Engineering

**CORNER INDEXING INFORMATION:**

TWP 7 NORTH RGE 6 EAST CORNER CODE J-3  
 (Winnipeg Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g. BLM designation for the corner, street intersection, plat name, block, lot, etc.)

FEB 28 12 44 PM '96

*Olson*  
 AUDITOR  
 GARY M. OLSON


NORTH QUARTER SECTION 18 COUNTY: SKAMANIA

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.030)

AUDITOR'S USE

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: **OLSON ENGINEERING, INC.**  
 1111 BROADWAY  
 ADDRESS: **VANCOUVER, WA 98660**



WASHINGTON PLANE COORDINATES:

N:


E: 2113/26

ORDER:

ZONE:

DATUM (Date of adjustment):

**CORNER INFORMATION:** Use the space below to provide the following information regarding the corner:  
 (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner perpetuation information. Please title and number the parties of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work). (See the back of this form for the requirements of the Survey Recording Act).



The original North quarter corner was established by Lewis, D.W. Shelton, under contract #552 in 1900 as a White Fir post marked "1/4 S 7" on the North face and "1/4 S 18" on the South face with these accessories: A 36" scribed White Fir South 42.5° East, 15 links, and a 4" scribed White Fir North 42.5° West 12 links.

In 1966 the Bureau of Land Management found the original bearing trees and set an iron post with a brass cap and accessories of an 11" scribed White Fir North 67.5° West 83 links, and an 11" scribed White Fir South 35.75° West 31 links.

Olson Engineering found the monument in 1976, however, due to logging, the only remaining accessory was the original Southwest bearing tree. The newer accessories are: a spike in the base of a 24" snag North 63° East, 1.29 feet and a spike in the base of a 6" Hemlock North 4.80 feet.

Registered ☒  
 Indexed, Air ☒  
 Indirect ☒  
 Filmed ☐  
 Mailed ☐

**OLSON** LAND SURVEYORS  
 ENGINEERS  
 ENGINEERING INC. 1111 BROADWAY, VANCOUVER, WA 98660 (206) 695-1385

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:


(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, NES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

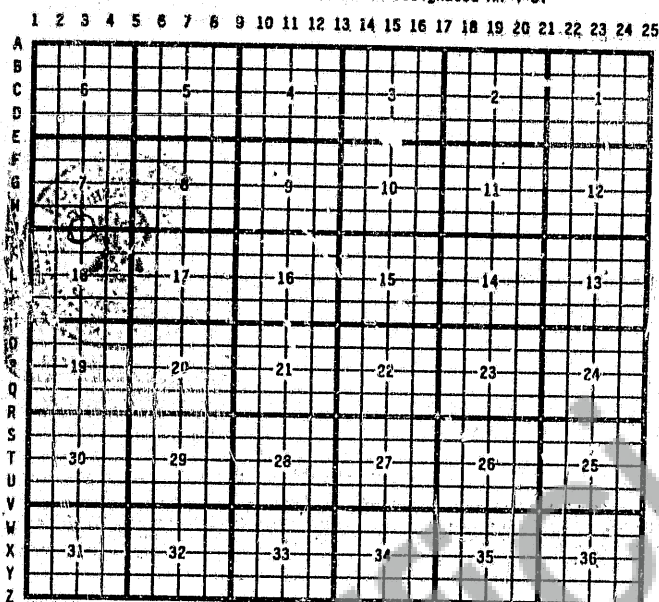

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: