

127319

BOOK 162 PAGE 542

FILED FOR RECORD  
SKAMANIA WASH  
By Terry Trantow

FEB 11 4 44 PM '97

GARY M. OLSON  
AUDITOR

**LAND CORNER RECORD**

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents the corner established by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: TRANTOW SURVEYING, INC.  
ADDRESS: 412 W. JEFFERSON PO BOX 287  
BINGEN, WA 98605-0287



SEAL/SIGNATURE/DATE  
01 Feb. 1997

GRANTER: PUBLIC

LEGAL: TWP: 2 N RGE 5 E CORNER CODE: P-3

ADDITIONAL IDENTIFIER: (BLM designation, street or plat names, block, lot, etc.)  
C 1/4 Section 19

COUNTY: SKAMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER: 31 ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and, if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.



No record of previous establishment.

No evidence of previous establishment.

Position based on ties to north and south 1/4 corners and calculations from surveys of record. At the position determined, set a 1 1/4" x 30" IP with 2 1/4" brass cap 26" in the ground, from which bear:  
20° Douglas-fir, East, 39.75 feet to nail at center of tree scribed WT, tagged  
38° Douglas-fir, S10E, 25.91 feet to nail at center of tree scribed WT, tagged  
RR tie fence post; S67W, 16.72 feet to nail in post, tagged.

Corner lies approximately 80 feet West of Skye Road.

Work conducted January 29, 1997 for conduct of Project #1368 and bearings are magnetic by hand compass.

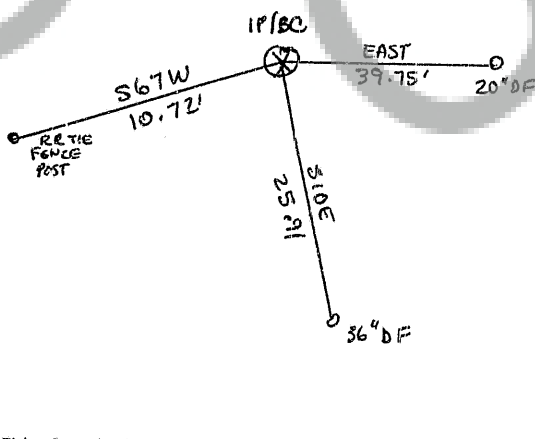

NO SCALE

Registered   
Indexed, Dir   
Indirect   
Filmed   
Mailed

This form is in compliance with the intent of RCW 65.04.045 and prescribed by the Public Land Survey Office, Department of Natural Resources - 1/97.

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:  
 For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C			6		5			4					3												
D																									
E																									
F																									
G			7		8			9					10												
H																									
I																									
J																									
K																									
L																									
M																									
N																									
O																									
P																									
Q																									
R																									
S																									
T																									
U																									
V																									
W																									
X																									
Y																									
Z																									

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

