

FILED FOR RECORD
SKAMANIA CO. WASH.
BY *Donald Kersch*

AUG 16 1 25 PM '02

O. Harvey
AUDITOR
J. MICHAEL GARVISONRegistered
Surveying
Engineer
Title
V.S. No.**LAND CORNER RECORD**

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction, in conformance with the Survey Recording Act.

COMPANY OR AGENCY: USDA Forest Service

ADDRESS: Gifford Pinchot National Forest
10600 NE 51st Circle
Vancouver WA 98682Don Kersch
Forest Land Surveyor8/9/2002
Date

GRANTEE: PUBLIC

LEGAL: TWP: 4 NORTH RGE: 7 EAST CORNER CODE: MN-15
ADDITIONAL IDENTIFIER: (BLM designation, street, or plat names, block, lot, etc.)

COUNTY: SKAMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM: (DATE OF ADJUSTMENT):

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

Corner History:

This corner was originally established by Roy Gaylord, PLS#18731, of Terra Surveying in Aug. of 1982. He set a 2 1/2" aluminum pipe with 2 1/2" aluminum cap. He also marked 2 bearing trees:

A 12" D.Fir - S48°14'W, 17.8 ft. scribed "CSS 1/64 S15"

A 11" D.Fir - N64°52'W, 14.93 ft. scribed "CSS 1/64 S15"

On August 6, 2002 I found the corner monument in good condition, set 4" above ground.

Found Gaylord BT's:

A 15" D.Fir live with overgrown face bears N64°52'W, 14.93 ft. scribed "CSS 1/64 S15"

A 12" D.Fir snag found pushed down with overgrown face and BT tag.

New BT's Established:

A 31" D.Fir bears S34°W, 44.8 ft. scribed "CSS 1/64 S15 BT"

Placed "BT" tags and "Land Survey Monument" signs on all BT's. Painted a 6" red band and faces of all standing BT's. Set location tag on 4" tall 12" dia. fir stump, which bears S64°W 6.8 ft. from monument.


The corner falls on a north-facing slope in blow down area. The private side to the north is clear cut, FS side is good stand of second growth 20" to 30". Forest Service property lines leading west and east are brushed, blazed, and posted w/USFS carsonite posts. Bearings are by compass w/ 21° East declination. Distances are to nail in side center of bearing tree.

Witnessed by: Georgene Wheatley, U.S.F.S., R. Hamilton, T. Walker, Stevenson High School

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated NW 4-5.

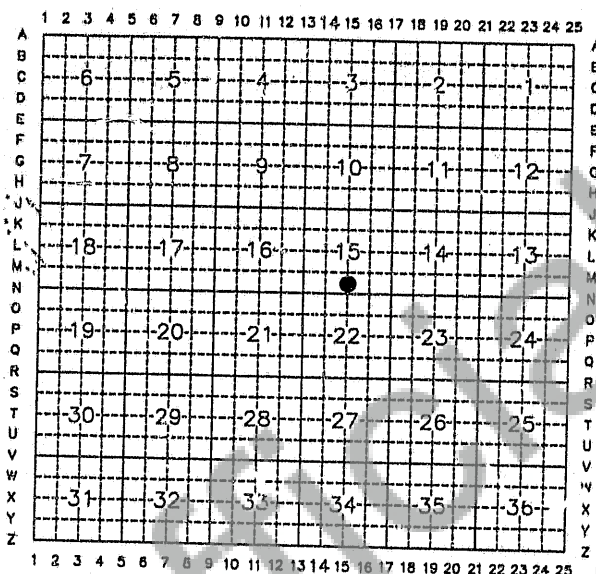

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

SP

21°
ASX

GAYLORD
BT
15" D-Fir

NEW 15" D-Fir
14.93'

FWN R7E
CSS 1/4
S15
1982
P.S. 18731

OLD
Fallen
BT

NEW 15" D-Fir
14.93'

Fd. 2 1/2" aluminum pipe
w/ 2 1/2" aluminum cap
Set 4" above ground.

NEW BT
31" D-Fir
44.8'