

FILED FOR RECORD
SKAMANIA CO. WASHBY *Donald Karsch*

Aug 16 1 31 PM '02

Don Karsch
AUDITOR
J. MICHAEL GARVISON**LAND CORNER RECORD****GRANTOR/SURVEYOR/PUBLIC OFFICER:** This corner record correctly represents work performed by me or under my direction, in conformance with the Survey Recording Act.**COMPANY OR AGENCY:** USDA Forest Service**ADDRESS:** Gifford Pinchot National Forest
10600 NE 51st Circle
Vancouver WA 98682**Don Karsch**
Forest Land Surveyor**8/9/2002**
Date**GRANTEE: PUBLIC****LEGAL:** TWP: 4 NORTH RGE: 7 EAST CORNER CODE: R-18
ADDITIONAL IDENTIFIER: (BLM designation, street, or plat names, block, lot, etc.)**COUNTY: SKAMANIA****WASHINGTON PLANE COORDINATES:** N: E:**ORDER:** **ZONE:** **DATUM:** (DATE OF ADJUSTMENT:**CORNER INFORMATION:** Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.**Corner History:**

This corner was originally established, by Cadastral surveyor Rick E. Tawney, in a 1982 BLM survey of section 23. He set a 2 1/4" x 28" aluminum post with aluminum cap in a mound of stone. He also marked 2 bearing trees:

A 16" D.Fir - S56°E 11.5 (7.3 ft.) mkd "W 1/16 S26 BT"

A 6" D.Fir - N62°W 15 1/2 (9.9 ft) mkd "W 1/16 S23 BT"

On July 17, 2002 I found the corner monument in good condition, set flush in small mound of stone.

Original BLM BT's:

A 23" x 2" tall Fir stump with overgrown face and BLM tag bears S55°E, 7.3 ft.

A 10" dead snag with overgrown face and BLM tag bears N62°W 10.0 ft.

New BT's Established:

A 14" D.Fir bears S26°E, 29.5 ft scribed "W 1/16 S26 BT"

A 16" D.Fir bears N40°W, 41.5 ft scribed "W 1/16 S23 BT"

Placed "BT" tags and "Land Survey Monument" signs on all BT's. Painted 6" red band and faces of all BT's. Set 6" carsonite post 3' north and 3' west of corner.

Corner falls on flat ground, approx. 40. ft. west and 500 ft. south of Little Soda Springs Road. Forest Service property lines leading west and north are brushed, blazed, and posted w/USFS carsonite posts. Bearings are by compass w/ 21° East declination. Distances are to nail in side center of bearing tree.


Witnessed by: Georgene Wheatley, U.S.F.S.

010101

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

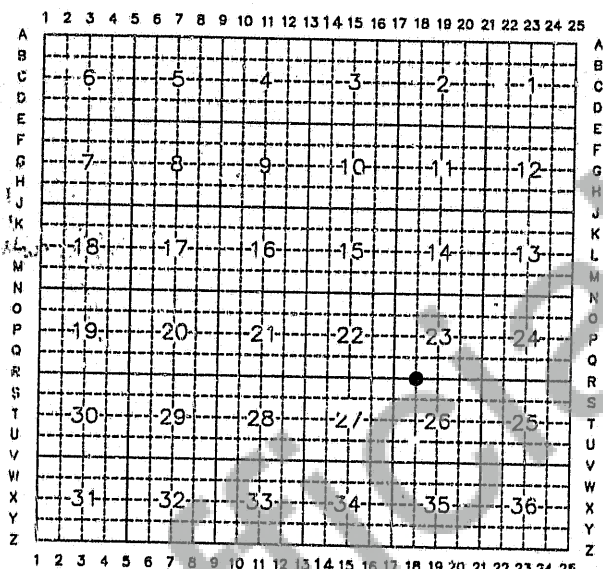

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

PLACE FOR ADDITIONAL COMMENT:

SP

