

FILED FOR RECORD
SKAMANAW, WASH
BY *Donald Karsch*

AUG 16 1 33 PM '02


Howry
AUDITOR
J. MICHAEL GARVISON

LAND CORNER RECORD

GRANTOR/SURVEYOR/PUBLIC OFFICER: This corner record correctly represents work performed by me or under my direction, in conformance with the

COMPANY OR AGENCY: USDA Forest Service

ADDRESS: Gifford Pinchot National Forest
10600 NE 51st Circle
Vancouver WA 98682



Don Karsch
Forest Land Surveyor

8/9/2002
Date

GRANTOR: PUBLIC

LEGAL:

TWP: 4 NORTH

RGE: 7 WEST

SEAL/SIGNATURE/DATE

CORNER CODE: Q-18

ADDITIONAL IDENTIFIER: (BLM designation, street, or plat names, block, lot, etc.)

COUNTY: SEMANIA

WASHINGTON PLANE COORDINATES: N: E:

ORDER:

ZONE:

DATE/M: (DATE OF ADJUSTMENT)

CORNER INFORMATION: Discuss the history, evidence found, and perpetuation of the corner. Diagram the references; provide the date of work; and if applicable, a reference to a map of record and/or the field book/page no. Use the back, if needed.

Corner History:

This corner was originally established by Roy Gaylord, PLS #18731, in 1981, monumented with a 5/8" iron rod. Cadastral surveyor, Rick E. Tawney, accepted this corner position in a 1982 BLM survey of section 23, and set a 2 1/4" x 28" aluminum post with aluminum cap. Tawney also marked 2 bearing trees:

An 8" cedar - N29°E 54 lks (35.6 ft.) mkd "SW 1/16 S23 BT"

A 7" D.Fir - S50°W 39 lks (25.7 ft.) mkd "SW 1/16 S23 BT"

On July 18, 2002, I found the aluminum monument, flush in the ground, in good condition, along side a 16" fallen snag.

Original BLM BT's:

An 11" live D.fir, with overgrown face blaze, bears S50°W, 25.7 ft.

A 15" x 2' high Cedar stump, with face and partial scribing visible "BT" bears N27°E, 35.6 ft.

New BT's Established:

An 18" D.Fir bears S20°E, 27.1 ft scribed "SW 1/16 S23 BT".

Placed "BT" tags and "Land Survey Monument" signs on all BT's. Painted 6" red band and faces of all Bt's. Set 6' carsonite post 3' west and 3' south of corner.


Corner falls on flat ground, approx. 600 ft. east of Little Soda Springs Road. Forest Service property lines leading west and south are brushed, blazed, and posted w/USFS carsonite posts. Bearings are by compass w/ 21° East declination. Distances are to nail in side center of bearing tree.

Witnessed by: Georgene Wheatley, U.S.F.S.

USE THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

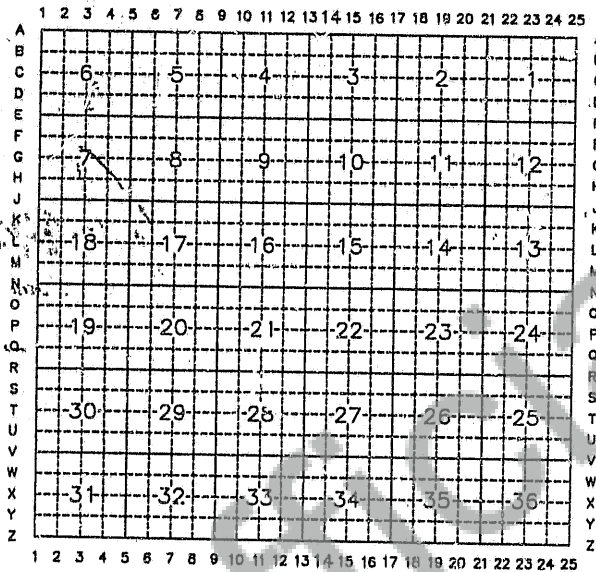

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

