


This form is in compliance with the intent of RCW 65.04.045 and prescribed by the Public Land
Land Survey Office, Department of Natural Resources - 1/97.

MARK THE CORNER LOCATION BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE.
For corners at the intersection of two lines, the corner code is the alphanumeric coordinate that corresponds to the appropriate intersection of lines.

For corners that are only on one line, the corner code is the line designation and the related line segment; i.e., a corner on line 5 between 'B' and 'C' is designated BC-5.

For corners that are between lines, the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN 4-5.

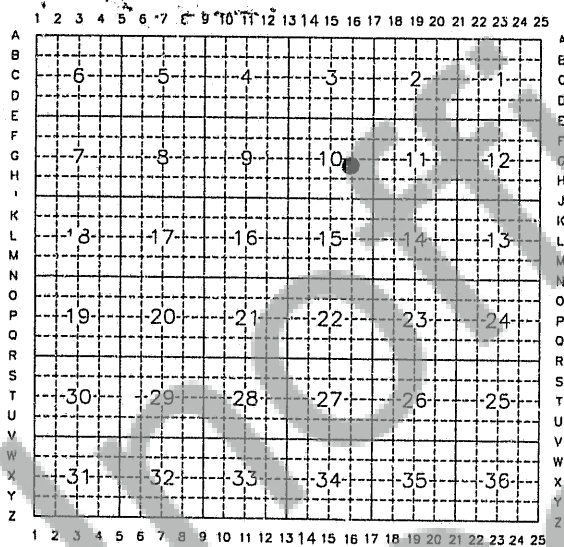

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

Bishop
BT
D-FIR
M₂ N 59° W
17.2'

OLD BT
STUMP
M₂ N 30° E
10.4'

NEW BT
16" D-FIR
M₂ N 44° E
29.4'

Found 2 1/2" x 30" aluminum pipe
w/ 2 1/2" aluminum cap found about
4" above ground.

SP