
## WEYERHAEUSER COMPANY LONGVIEW AREA

## LAND CORNER RECORD

1 10 N, R. GE, W.M.	KAMANIA	County Corner Code NoL-M-3-4
Segregated Surveys: Name: アサクモルロメールの3		
Name PHOENIX NO 3	act, Mining Claim, Indian Allotmen	t, Federal Reserve, Townsite.
I. History of Corner Establishmen	and Subsequent Resto	ration: Segregation Survey
2. Description of Evidence Found:	Southed Stalle	
	•	
2 BT's Scribed.	T.	\ '/ P
	CAL	}
. Describe Monument, Ac ssories	and Corollary Data to F	erpetuate this Corner Location. Dia-
gram corner and indicat meridi 1-81 Page No. 5 Date	an and reference to man	of record. Surveyor's Field Book No.
	1 72.	
89 10 11 12 15 10 23 12 19 Dead	H.F.R TY. 8	bar & Cap
Ser, be	NO DE	bar : Cap 5/6/96
20 20 20 20 20 20 20 20 20 20 20 20 20 2		
	SIN	
27701(1) (1) (1)		
- #CC 3C 36 F		Em lock Dead MAGNETTI
Washington Plane Coordinates:	Zone, Y	7. Scr. 60
Order Accuracy. De	rived from:	
Pin Pointed on Photo No	DateLoc	ated at
SURVEYOR'S CE		[SIAL]
This corner record correctly represented in the compliance and the compliance of 1972. Date of 1972 and the compliance of 1972 and the compliance of 1972 and the corner of 1972 and th	with the provisions of	Chapter
50, Yaws A 1973, Date 2- Mchie Confestion	161	96
,	92421	No.
A)	INTRODE CODMISSION	PEGISTERS STONAL LAND STONAL LAND
Filed for record this // to day of Book of	May May	190/ at 0//2000 / M. To
21212 2.	at pa	ge at the request of
	= [30]	County Auditor
Form prescribed by Bureau of Surv	eys and Maps pursuant	to the provisions of Section 5 (2).

## CORNER RECORD INDEX DIAGRAM

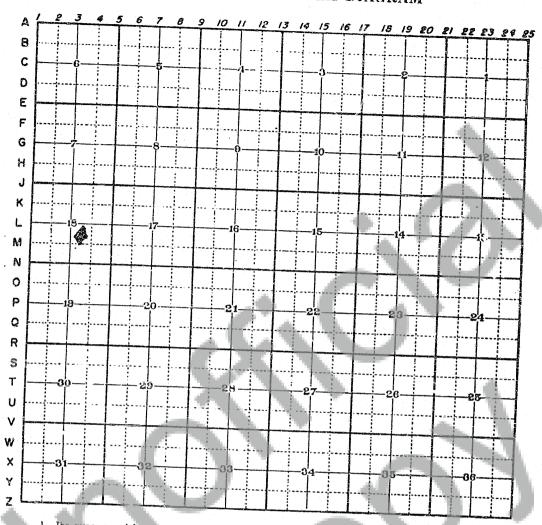

- 1. The corner record form may be duplicated with the land surveyor's or company name and address
- Section and Sect not Subdivision Corners.

Corner Code No. refers to an alphabetical-numerical coordinate number derived from the system shown on the township diagram; i.e., the corner common to sections 5, 6, 7 and 8 is identified by E.5. the 1/2 corner between sections 10 and 15 by J-15. In those cases where double or triple corners exist. The corle number will be for a single point but the corner record must clearly show which corner is being reported

Corners such as meander corners, angle points, witness points, etc., which fall on one line only will be identified by the line and line sector: i.e., a corner falling between B and C on line 5 would be coded BC-5 and a corner falling on line E between lines 3 and 4 would be designated E-3-4. Corners common to two or more townshps will be properly coded and filed in each

Segregated surveys (DLC, HES, Indian Allotments, Tracts, etc.). Corners of segregated tracts will be identified by the name or designation of the tract followed Corners or segregated tracts will be identified by the name or designation of the tract followed by the number assigned that corner during the original survey, or if not so numbered in the original survey, will then be numbered in sequence as established. Example: Homestead Entry Survey No. 218, Corner No. 5: John D. Smith Donation Land Claim, Corner No. 1; Tract 42, Corner No. 7; Mineral Survey No. 1047, Corner No. 2; Charlie Wood Indian Allotment, Corner No. 1

Corners of segregated tracts may be spatially located by the township code; i.e., MN-4-5 would locate a corner in the SE'A SE'A of section 18 HJ-9 would locate a tract corner which happens to fall on a section line and should be indexed under both the township code and the segregated

4. Parts 1, 2 and 3 of the record form boil down to: what information and physical evidence may be available by which a corner position may be ascertained; what evidence was recovered to substantiate this position and what physical evidence and corollary information is available to assist the next person to recover this corner. Let the kind of a corner record you would like to find be your guide in building this record.

Corner records will normally be numbered in sequence for each township as received and the page numbers will be cross indexed on the proper township index plat.