

RES 20-1808(9-77)

STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES
BUREAU OF SURVEYS AND MAPS

LAND CORNER RECORD

T 3 N, R 6 East, W.M. Skamania County Corner Code No. E - 15 W.C.
Segregated Surveys:
Name: N/A Corner No.: N/A
DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:
Originally set by 1903 G.L.O. survey.

No restoration found.

2. Description of Evidence Found:

- 1-20" Fir B.T. snag at S. 39 W., 32 feet from corner location.
1-24" Fir B.T. snag at N. 20 W., 22 feet from corner location.
1-15" Fir stump cut off 2- $\frac{1}{2}$ feet high at corner location as per G.L.O. notes.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 600.20 Page No. 31 Date of work 22 Sept. '80

Witness corner to $\frac{1}{4}$ corner
is PK nail in top of 15" Fir
stump cut off 2- $\frac{1}{2}$ feet high
on top of rock bluff. Tree
was 20" +/- diameter when
alive. Set 2 D.N.R. brass
caps in rock face for R.M. 's
to Witness Corner.

Coordinate for R. M. No 1, Y = 162,087.88
X = 1,603,438.07

See sketch on back.

Coordinate for R. M. No. 2, Y = 162,079.50
X = 1,603,436.94

Washington Plane Coordinates: South Zone, Y 162,080.93, X 1,603,437.17
3rd Order Accuracy. Derived From: USC & GS "Mowich" and USC & GS
"Lookout Mtn. RM # 1"
Pin Pointed on Photo No. _____ Date _____ Located at _____

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or
under my direction in compliance with the provisions of Chapter
50, Laws of 1973. Date 1/28/82

Signature M. G. Kinnaman Certificate No. 11977

93658

AUDITOR'S CERTIFICATE

Filed for record this 1 day of Feb 1982 at 12 P. M. In
Book 3/6 of Monuments at page 6 at the request of
Washington State Department of Natural Resources.

Lucy M. Olson & E. Myerfeld
County Auditor

GLO 1903

589-59W ON TRUE LINE

38.50 CREEK BLKS WIDE N.E

59.87 1/4 COR. FALLS ON ROCK SAND NOT SET.

40.17 20" Fir. Witness Cor.

SLC1000 210 1452 + 14 510

20" Fire S39W 1945 (w.c. 1/4 S 10 ST)

24" Fire N20W 33W (w.c. 145 3 BT)


Witness Corner to the
N 1/4 CORNER S10 T3N R6E

FOUND

15" FIR STUB AT 90° ROCK BANK

20 "FIR SNAG 5394 32' (BT)

24' FIR SWAL N20W 22' (BT)

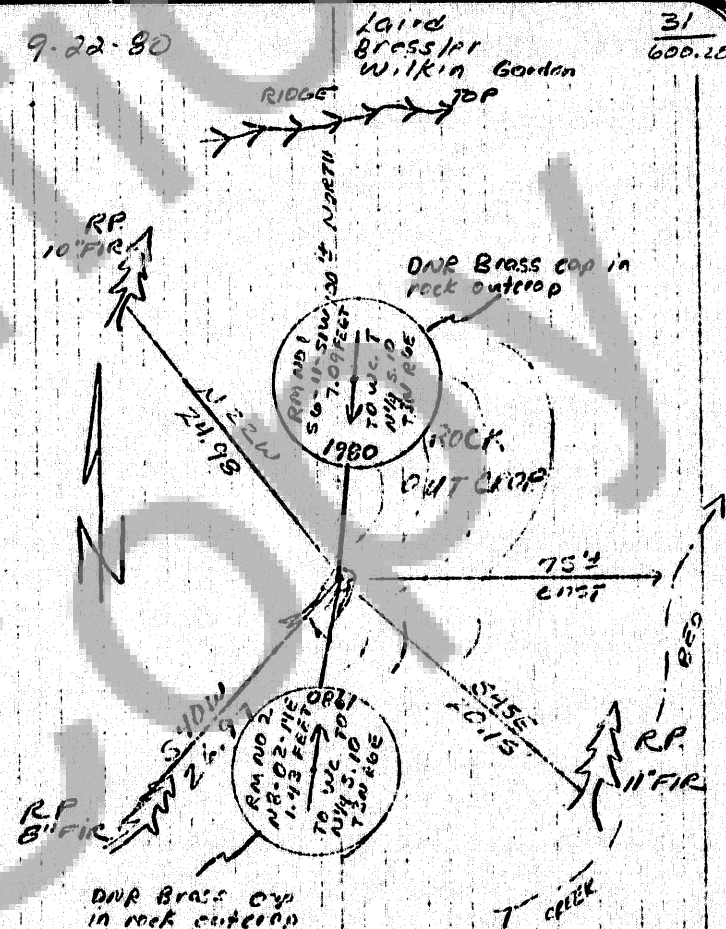

THE WITNESS COR TO 1/4 COR IS A P.K. NAIL
IN 15" FIR STUMP CUT OFF 2 1/2" HIGH ON
TOP OF ROCK BLIND. TREE WAS 30" DIA.
WHEN ALIVE. SET 2 D.N.R. BRASS CAPS IN
ROCK FACE FOR RAILS TO WITNESS CORNER