

RES 20-1808(9-77)

93968

STATE OF WASHINGTON  
DEPARTMENT OF NATURAL RESOURCES  
BUREAU OF SURVEYS AND MAPS

LAND CORNER RECORD

Skamania

County

T 3 N, R 6 East, W.M.

Corner Code No. E - 15 W.C.

Segregated Surveys:

Name: N/A

Corner No.: N/A

DLC, RES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:  
Originally set by 1903 G.L.O. survey.

No restoration found.

2. Description of Evidence Found:

1-20" Fir B.T. snag at S. 39 W., 32 feet from corner location.

1-24" Fir B.T. snag at N. 20 W., 22 feet from corner location.

1-15" Fir stump cut off 2-1/2 feet high at corner location as per G.L.O. notes.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 600.20. Page No. 31. Date of work 22 Sept. '80.

Witness corner to 1/4 corner is PK nail in top of 15" Fir stump cut off 2-1/2 feet high on top of rock bluff. Tree was 20" +/- diameter when alive. Set 2 D.N.R. brass caps in rock face for R.M.'s to Witness Corner.

Coordinate for R.M. No 1, Y = 162,087.88  
X = 1,603,438.07

See sketch on back.

Coordinate for R.M. No. 2, Y = 162,079.50  
X = 1,603,436.94

Washington Plane Coordinates: South Zone, Y 162,080.93, X 1,603,437.17

3rd Order Accuracy. Derived From: USC & GS "Mowich" and USC & GS

"Lookout Mtn. RM # 1"

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date May 11, 1977

Signature

Certificate No.

93968

AUDITOR'S CERTIFICATE

Filed for record this day of at 1977 at M. In Book of at page at the request of Washington State Department of Natural Resources.

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

ROLL 582.4  
DAILY RECORDINGS  
BOARD OF COUNTY COMMISSIONERS  
MARRIAGE APPLICATIONS





G.L.O. 1903

S89-S9W ON TRUE LINE

38.50 CREEK 8LKS WIDE N.E.  
39.87 1/4 COR. FALLS ON ROCK BANK, NOT SET.  
40.17 20" FIR. WITNESS COR.

SUBSIDED W.C. 1453 + 1/4 S10


20" FIR S89W 19LKS (W.C. 1451 SET,  
24" FIR N20W 33LKS (W.C. 1453 SET)

Witness Corner to the  
N 1/4 CORNER S10 T3N R6E

FOUND.

15" FIR STUB ATOP ROCK BANK  
20" FIR SNAG S89W 32' (BT)  
24" FIR SNAG N20W 22' (BT)

9-22-80

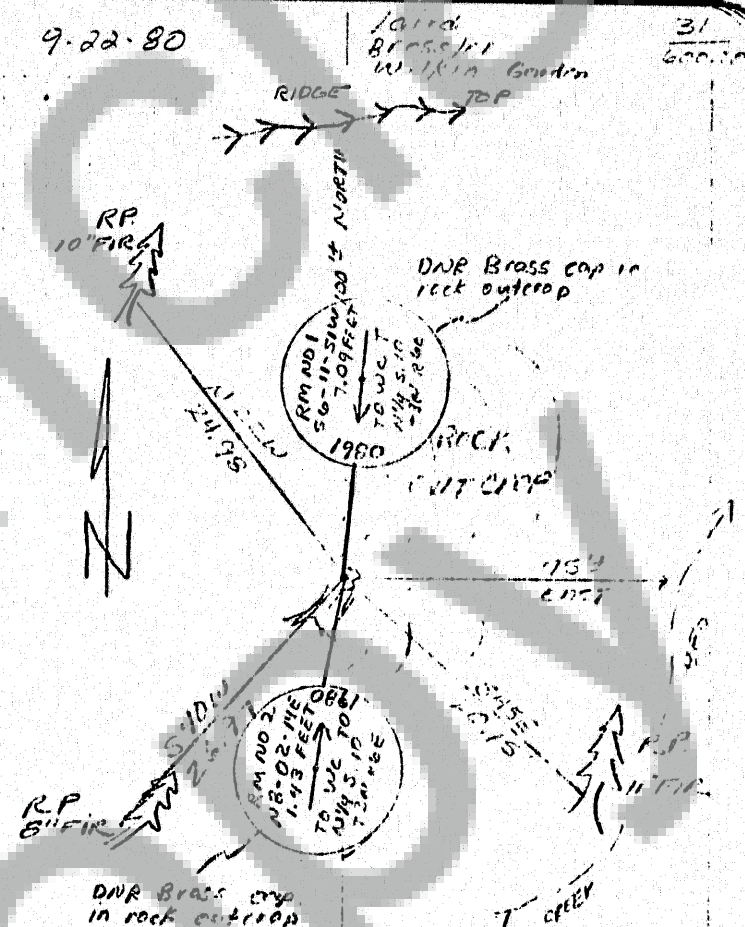

THE WITNESS COR. TO 1/4 COR. IS A P.K. NAIL  
IN 15" FIR STUB CUT OFF 24" HIGH &  
TOP OF ROCK BANK. TREE WAS 20" DIA.  
WHEN ALIVE. SET 2 DNR BRASS CAPS IN  
ROCK FACE FOR RAILS TO WITNESS CORNER.