


LAND CORNER RECORD

SHAMANIA County
 T. 7 N, R. 5E, W.M. Corner Code No. E-13
 Segregated Surveys:
 Name: ~~SE 2nd SEC 4~~ SOUTH-WEST SECTION 3 Corner No.:
 D.L.C., H.E.S., Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.




1. History of Corner Establishment and Subsequent Restoration:

ORIGINALLY SET BY GLO
 RE-SET BY WASH DNR, 1970

2. Description of Evidence Found: DOWNED 42" HEMLOCK STUMP, $\$38\frac{1}{2}^{\circ}W$, 22', VISIBLE SCRIBE
 30" HEMLOCK STUMP, $N71^{\circ}E$, 5', NO VISIBLE SCRIBE, FITS GLO CALLS
 18" ~~WHITE~~ SILVER FIR STUMP, $\$13\frac{1}{2}^{\circ}E$, 32', VISIBLE SCRIBE
 DOWNED 14" ~~WHITE~~ SILVER FIR STUMP, $N30^{\circ}W$, 17', NO VISIBLE SCRIBE, FITS GLO CALLS
 12" SILVER FIR, $N1^{\circ}W$, 51', DNR TAG
 16" SILVER FIR, $N83^{\circ}W$, 16', WEYERHAEUSER TAG
 10" SILVER FIR, $\$59^{\circ}W$, 7', DNR TAG, USFS LOCATION TAG
 49" SILVER FIR, $\$5^{\circ}W$, 24', WEYERHAEUSER TAG
 20" SILVER FIR, $\$22^{\circ}E$, 28', DNR TAG

SEE DIAGRAM BELOW FOR MON. DESC.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 161-1 Page No. 21 Date of work 6-16-82

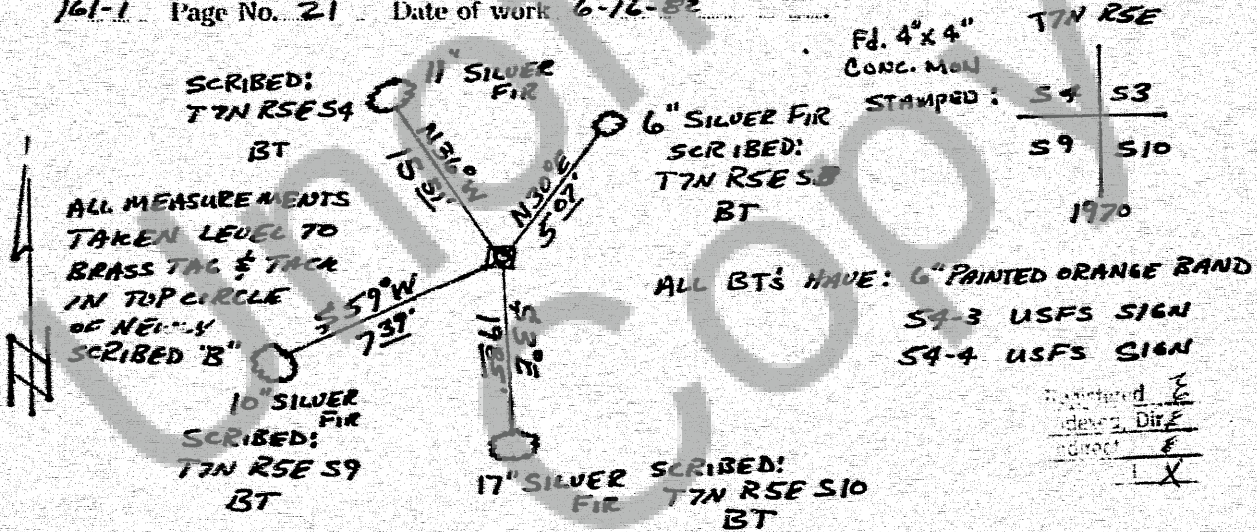

Washington Plane Coordinates: Zone, Y, X
 Order Accuracy. Derived From:
 Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

[SEAL]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date June 25, 1982
 Signature: Michael C. [unclear] Certificate No. 2515652

94276



AUDITOR'S CERTIFICATE

Filed for record this 1 day of July 1982 at 11 A.M. In Book 7/5 of Monument 6 at page 24 at the request of Michael C. [unclear]

Jerry M. [unclear]
 County Auditor