

94313

LAND CORNER RECORD

COWLITZ

County

T 8 N, R. 4E, W.M.

Corner Code No. E-17

Segregated Surveys:

Name: NORTHWEST CORNER OF SECTION ELEVEN Corner No.:

DLC, HPS, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite

1. History of Corner Establishment and Subsequent Restoration:

ORIGINALLY SET BY GOVERNMENT LAND OFFICE SURVEY

RE-SET BY BUREAU OF LAND MANAGEMENT - 1969

2. Description of Evidence Found

FD 2 1/2" PIPE WITH 3" BRASS CAP STAMPED: T8N R4E 53152 510/511 1969 8" UNDER THE SURFACE

7" HEMLOCK STUMP, S 44° E, 55.11', VISIBLE SCRIBE, SET BY BLM

36" HEMLOCK STUMP, S 11° W, 40.34', VISIBLE SCRIBE, REC. DIST - 37.62', DISTURBED BY LOGGING


37" HEMLOCK STUMP, N 38° E, 26.80', VISIBLE SCRIBE, REC. DIST - 32.67', DISTURBED BY LOGGING

48" FIR STUMP, N 30° W, 33.95', VISIBLE SCRIBE, PARTIALLY BURIED BY LOGGING

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

169-1 Page No. 4 Date of work 6-30-82

REFERENCE MONUMENTS ARE 1/2" REBAR WITH CAP (LS15152) APPROX 4" ABOVE GROUND HAVE 54-3 AND 54-4 USFS SIGNS RIVETED TO FIREGLASS POST BEHIND EACH R.M. FACING CORNER

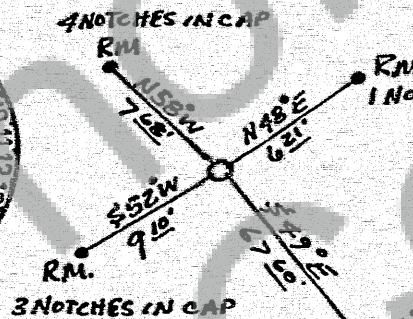

11" HEMLOCK SCRIBED: T8N R4E S11 BT BT HAS: 54-3, 54-4 USFS SIGNS 6" PAINTED ORANGE BAND DIST. TAKEN LEVEL FROM MON TO BRASS TAG TOP OR NEWLY SCRIBED '8'

Washington Plane Coordinates: Zone, Y, X

Order Accuracy. Derived From

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

[SEAL]

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973, Date July 3, 1982

Signature Michael G. [unclear] Certificate No. LS 15152

94313

AUDITOR'S CERTIFICATE

Filed for record this 7 day of July 1982 at 11:30 A.M. In Book 3/4 of Monument at page 1 at the request of

Michael G. [unclear]

County Auditor