

# LAND CORNER RECORD

SKAMANIA

County Corner Code No. A-25

T 7 N, R 5E, W.M.  
Segregated Surveys:

Name: **NE CORNER SECTION 1-T7N-R5E** Corner No.: **NE - 1**  
DLC, HES, Tract, Mining Claim, 1/4 Acre Allotment, Federal Reserve, Townsite.



### 1. History of Corner Establishment and Subsequent Restoration:


ORIGINALLY SET BY G.L.O.  
RESTORED BY B.L.M. 1961

### 2. Description of Evidence Found:

B.L.M. MON. 2 1/2" PIPE W/ BRASS TABLET MARKED:  
ORIGINAL CORNER STONE & 1 1/2" I.P. NEXT TO MON.

- OBT'S FND: 28" SILVER FIR (ALIVE) VIS. SCRIBE S 80 1/2° E 4 1/2' WEYLO RP ("PK" NAIL)
- 27" SILVER FIR SNAG VIS. SCRIBE S 29 3/4° W 11 88' U.S.F.S. BT SIGN
- 32" SILVER FIR STUMP FACE ONLY INTACT N 08 3/4° W 13 86' U.S.F.S. LOL. POSTER
- ASSUMED B.T. 1961 18" S. FIR (ALIVE) N 39 3/4° E 29 20' U.S.F.S. BT SIGN

### 3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 161. Page No. 8 Date of work 9/22/81

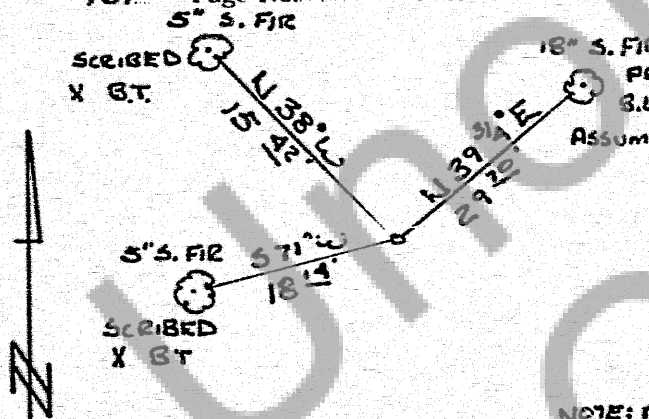

BT'S HAVE: - 54-4 & 54-3 SIGNS NAILED ON  
- 6" RED BANDS PAINTED ON  
54-3 SIGNS NAILED TO O.B.T'S TO  
SE, NW, SW

NOTE: MEASUREMENTS TAKEN HORZ FROM MON TO  
BRASS SURVEY TAGS (LS 15652) NAILED IN TOP  
CIRCLE OF NEWLY SCRIBED "B"s

Washington Plane Coordinates: Zone, X  
Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

### SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date July 24, 1982  
Michael G. Hobbs Signature LS15652 Certificate No.



### AUDITOR'S CERTIFICATE

Filed for record this 30th day of JULY 1982 at 2:00 P.M. In  
Book 715 of MONUMENTS at page 39 at the request of  
MICHAEL G. HOBBS  
J.M. Olson by A. Nevis County Auditor