

LAND CORNER RECORD

T. 3 N, R. 8 East, W.M. Skamania County
 Segregated Surveys: Corner Code No. E-5
 Name: n/a Corner No.: n/a
 DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

Originally set by G.L.O. surveyor, Robert A. Webster, in 1896.
 A 1" O.D. galvanized pipe with stamped brass cap set by Skamania County Engineers. This corner is shown on the following recorded surveys:
 Book 1 pages 53, 54, 118, 135, and 260.
 Book 2 pages 21 and 54.

2. Description of Evidence Found:

30" Fir B.T. stump at N 72 W, 33.3 feet.
 36" Fir B.T. stump with visible scribe at S 37 W, 45.7 feet.
 Above described Skamania County 1" galvanized pipe.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No. 600.22 Page No. 2 Date of work 11-3-82

Shown on D.N.R. Final Map #462. See corner diagram on reverse side.

Washington Plane Coordinates: South Zone, Y 161,300.55 X 1,659,443.34
 3rd Order Accuracy. Derived From: 1975 Olson Eng. survey data at S.W.
 corner Sec. 5 (Recorded in Bk. 1 page 54, Records of Skamania County)
 Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date Sept. 29, 1983
 Signature M. A. Kinnaman Certificate No. 11977



AUDITOR'S CERTIFICATE

Filed for record this 6th day of OCTOBER 1983 at 1:05 P.M. In Book 3/8 of MONUMENT at page 58 at the request of Washington State Department of Natural Resources

M. M. Olson, Jr., Dep. County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973.

G.L.D. OF 1896

30" Fir N58E 17 1/2 L	11.55
24" Fir S65E 19 L	12.34
36" Fir S32 1/2 W 10 L	41.20
30" Fir N75W 49 L	32.34

Sec. Cor. 5-6 7-8 T3N R 8E

FOUND 36" Fir STUMP W/VISIBLE
SCRIBING S37W 45.7' TO CENTER OF
STUMP. 30" FIR STUMP NO SCRIBE
N 72W, 33.3' TO CENTER OF STUMP.,
FROM SKAMANIA Co. Pipe Cap

other recorded surveys using this corner point:


book 1, page 260
book 1 page 54
book 1 page 54
book 1 page 53
book 1 page 135
book 2 page 21
book 1 page 118
book 2 page 64

corner is trav. sta. 100

11-3-82

LAIRD
GORDON
BRESSLER

2
600.22

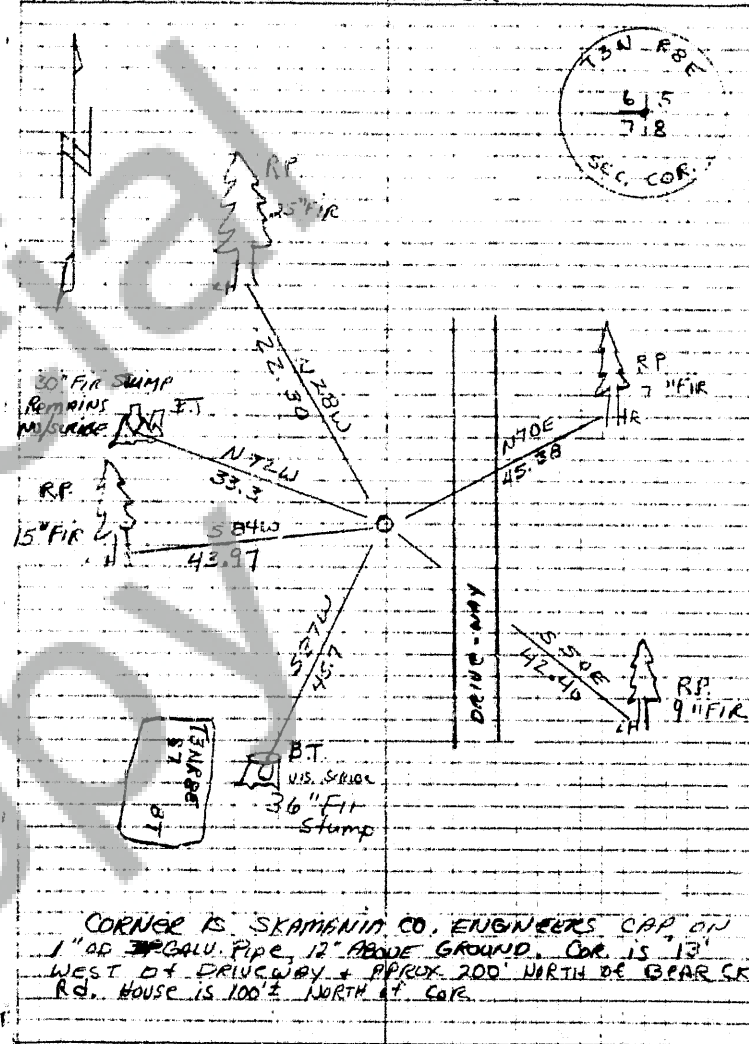

CORNER IS SKAMANIA CO. ENGINEERS CAP ON
1" OD GALV. PIPE 12" ABOVE GROUND. COR IS 13'
WEST OF DRIVEWAY + APPROX 200' NORTH OF BEAR CR
RD. HOUSE IS 100' NORTH OF COR.