

96786

LAND CORNER RECORD

T 3 N, R 7E, W.M. County SKAMANIA
 Segregated Surveys: Corner Code No. A-21
 Name: N/A Corner No. N/A
D.L.C., RES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration: ORIGINALLY SET BY G.I.D. SURVEYOR, ROBERT F. WHITHAM, DURING 1903 G.I.D. SURVEY. CORNER WAS SET 3.14 CHAINS EAST OF FOUND 1895 S.C. 35/36, T4N-R7E.



2. Description of Evidence Found:

NONE.

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

600.24 Page No. 47 Date of work 10-12-83
SHOWN ON D.N.R. F.M. # 477. SEE CORNER DIAGRAM ON REVERSE SIDE.

SET STD. D.N.R. CONCRETE
 MONUMENT W/STAMPED
 BRASS CAP AT SINGLE-
 PROPORTIONED POSITION.



Washington Plane Coordinates: SOUTH Zone, Y 166197.99, X 1643105.35
3RD Order Accuracy. Derived From: UES TO USC&GS "GREENLEAF"
& USC&GS "SEDUM POINT"
 Pin Pointed on Photo No. _____ Date _____ Located at _____

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date December 1, 1983

Signature M. A. Kinnaman Certificate No. 11977



AUDITOR'S CERTIFICATE

Filed for record this 5 day of December 1983 at 1:20 P.M. In Book 3/7 of Monuments at page 34 at the request of

Dep't of Natural Resources

Gary M. Olson
 County Auditor

PAGE 35

GLO survey of 1903 (Robert Whitlam)
76.14 Set post
10" Dead Fir S 5° 30' E 15L. 9.20'
10" Dead Fir S 61° 15' W 85L 56.10'

Closing corner 211 T3N R7E

No orig. evidence found


98496

10-12-83

GARDON
BRESSLER

47
600.21

T4N R1E
S. 36
S. 2 TS
T3N R7E
C. 6
1983

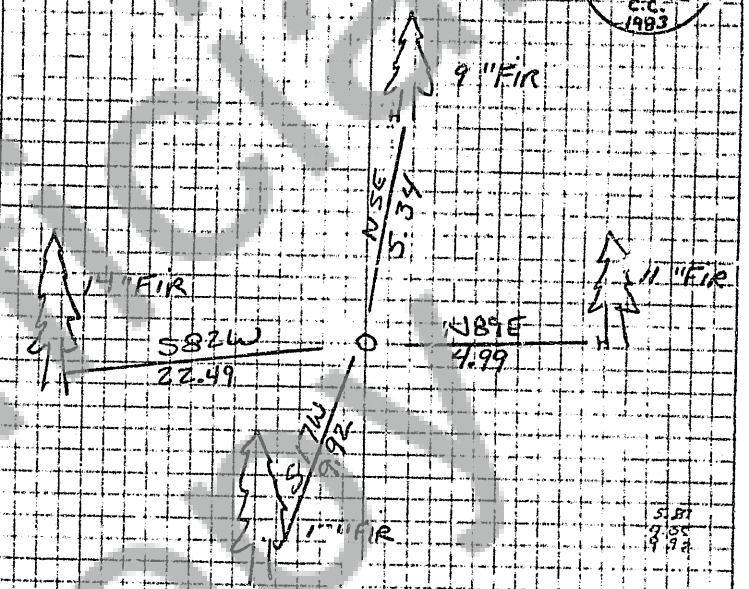

SET CONC. MON. W/ DNR BRASS CAP
6" ABOVE GROUND @ CALL POS.
COR FALLS ON STEEP HILLSIDE TO
NORTH, TOP OF RIDGE 110° E SOUTH