

98033

LAND CORNER RECORD

3/7

PAGE 54

Skamania

County

T 3 N. R. 7 E. W.M.

Corner Code No. J-25

Segregated Surveys:

Name:

N/A

Corner No. N/A

DLC, HES, Tract, Mining Claim, Indian Allotment, Federal Reserve, Townsite.

1. History of Corner Establishment and Subsequent Restoration:

G.L.O. survey by Jacob Richardson in 1893. Set post and two bearing trees.

Iron rod set by Bert Mason in 1956 from line trees to north and south of corner.

D.N.R. replaced iron rod with concrete monument and stamped brass disc in 1968.

2. Description of Evidence Found:

Found D.N.R. concrete monument.

A 5" fir with D.N.R. tag and nail driven in base bears N. 29° W. 13.93 ft.


A 6" fir with D.N.R. tag and nail driven in base bears S. 82° W. 19.47 ft.

A 14" fir with D.N.R. tag and nail driven in base bears S. 4° E. 19.64 ft.

A 22" fir with healed blaze bears N. 71° W. 80 ft. (Mason bearing tree).

3. Describe Monument, Accessories and Corollary Data to Perpetuate this Corner Location. Diagram corner and indicate meridian and reference to map of record. Surveyor's Field Book No.

Page No. Date of work May 21, 1984

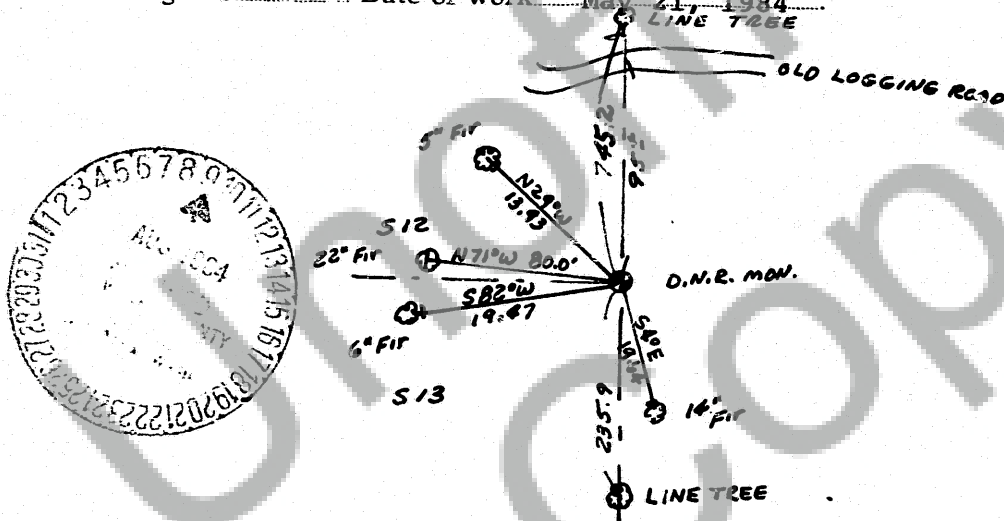

Washington Plane Coordinates: Zone, Y, X

Order Accuracy. Derived From:

Pin Pointed on Photo No. Date Located at

SURVEYOR'S CERTIFICATE

This corner record correctly represents work performed by me or under my direction in compliance with the provisions of Chapter 50, Laws of 1973. Date 4/4 3/1, 1984

Signature

11733

Certificate No.

98033

AUDITOR'S CERTIFICATE

Filed for record this 9TH day of AUGUST 1984 at 3:05 P.M. In Book 37 of MONUMENTS at page 54 at the request of

TENNESON ENGINEERING CORP.

M. Olson by d. J. Davis, Dep.

County Auditor

Form prescribed by Bureau of Surveys and Maps pursuant to the provisions of Section 5 (2), Chapter 50, Laws of 1973

