

115404

BOOK 133 PAGE 160

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:TWP 1N RGE 5E CORNER CODE A-15
(Willamette Meridian) (See Instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

FILED
SPIN
BY Olson Engineering

JAN 29 4 04 PM '93

GARY OLSON

Indexed	
Indirect	
Filed	2/11/93

NORTH 1/4 CORNER SECTION 3COUNTY: **SKAMANIA**

AUDITOR'S USE Mailed

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.


COMPANY OR AGENCY: **OLSON ENGINEERING INC.****1111 BROADWAY**ADDRESS: **VANCOUVER, WA 98660**

1/20/93

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner:
 (1) Pertinent Corner History. (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

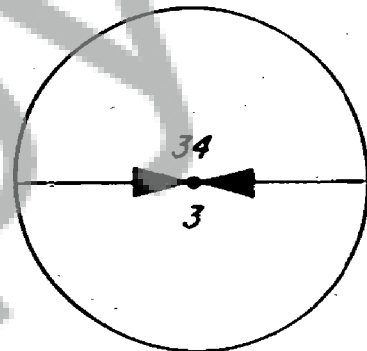

The original corner post was established on April 27, 1859 by United States Deputy Surveyor, Lewis Van Vleet. Bearing trees were a 5" willow South 9° East, 67 links, and a 40" dead fir North 27° East, 24 links of which no evidence remains. During a previous survey by Olson Engineering a 4-way fence corner was tied and used as the quarter corner position, since this fence corner was within 0.10' of being on line with the Southeast and Southwest section corners and fits East-West GLO distance from these same Southeast and Southwest corners fairly well.

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, D.C.'s, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MM-4-5.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C		6				5				4				3					2					1	
D																									
E																									
F																									
G		7				8				9				10					11					12	
H																									
J																									
K																									
L		18				17				16				15					14					13	
M																									
N																									
O																									
P		19				20				21				22					23					24	
Q																									
R																									
S																									
T		30				29				28				27					26					25	
U																									
V																									
W																									
X		31				32				33				34					35					36	
Y																									
Z																									

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: