

115408

BOOK 15 PAGE 170

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09, ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:TWP 3N RGE 8E CORNER CODE S-7,15-16
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

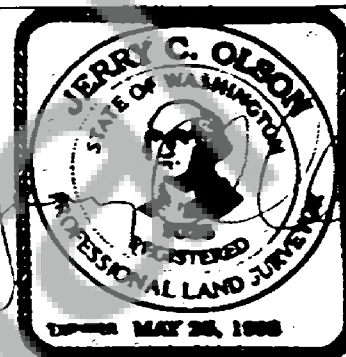
W. Olson Engineering

JAN 20 1993

GARY OLSON

Registered
Indexed 1
Indirect 2
Filed 2/12/93NE CORNER MURPHY D.L.C. #37COUNTY: SKAMANIAAUDITOR'S USE Waited**LAND SURVEYOR INFORMATION:** (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: OLSON ENGINEERING INC.
1111 BROADWAY
ADDRESS: VANCOUVER, WA 98660

1/28/93

WASHINGTON PLANE COORDINATES: N: E:

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner:
 (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

MURPHY
D.L.C. #37

In 1875, Smith and Spray, surveyors for the General Land Office set a post for the Northeast corner of the Murphy Donation Land Claim. The bearing trees are as follows:

A fir tree 12" in diameter South 40° West, 80 links distances,

A fir tree 36" in diameter North 25° East 109 links distance.

In 1935, for a survey for the Bonneville Project Lands, the United States Corps of Engineers found the original stake and bearing tree's set by Smith and Spray. They remonumented the stake by replacing it with a brass cap. Subsequent surveys show a brass cap.

In 1975 our field crews tied a brass cap for the Skamania County Control project.

Since the brass cap was set in the original position of the General Land Office post, we accepted this as the Donation Land Claim corner.

Reference Surveys

Olson - Book 1, Page 59

Wall & Tenneson - Recorded February 1955

U.S. Corps of Engineers - R 0-17-6

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MM-4-5.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C		6			5			4				3			2					1					
D																									
E																									
F																									
G		7			8			9				10			11					12					
H																									
J																									
K																									
L		18			17			16				15			14					13					
M																									
N																									
O																									
P		19			20			21				22			23					24					
Q																									
R																									
S																									
T		30			29			28				27			26					25					
U																									
V																									
W																									
X		31			32			33				34			35					36					
Y																									
Z																									

RCV 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT: