

FILED FOR RECORD
BY
JUL 9 1 12 PM '93

AUDITOR
GARY M. OLSON

DNR HISTORY

NW SECTION CORNER
FOUND 4"x4" DNR BRASS CAP
EXPOSED 4" CARSONITE POST BY MONUMENT
3" PIPES
14" WHITE FIR AT S 29 E @ 13.62'
10" HEMLOCK AT S 59 W @ 23.09'
7" HEMLOCK AT N 35 W @ 12.83'

E-5
NW SECTION CORNER
FOUND 4"x4" DNR BRASS CAP
EXPOSED 4" CARSONITE POST BY MONUMENT
3" PIPES
14" WHITE FIR AT S 29 E @ 13.62'
10" HEMLOCK AT S 59 W @ 23.09'
7" HEMLOCK AT N 35 W @ 12.83'

E-9
NE SECTION CORNER
FOUND 4"x4" DNR BRASS CAP
EXPOSED 4" CARSONITE POST BY MONUMENT
3" PIPES
14" WHITE FIR AT S 29 E @ 13.62'
10" HEMLOCK AT S 59 W @ 23.09'
7" HEMLOCK AT N 35 W @ 12.83'

G-5
WEST QUARTER CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'

G-9
EAST QUARTER CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT S 77 E @ 34.81'
14" HEMLOCK AT S 28 E @ 39.70'
8" HEMLOCK AT S 17 W @ 25.04'
X" ON EASTERLY TOWER LEG 5.7'
ABOVE GROUND AT S 80 W @ 162.00'

J-5
SW SECTION CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'

J-9
SE SECTION CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'

E-7
GLQ CORNER HISTORY
ORIGINAL CORNER BY CHARLES E. SEARS IN 1873. HE SET A POST WITH A 28" x 4" 60" HEMLOCK 218 CHAINS WEST OF A PERPENDICULAR BLUFF OF ROCK. WE FOUND THE BURNT 60" STUMP & CONFIRMED IT WITH THE BLUFF OF ROCK. THE STUMP HAD AN OVAL, BURNT FACE AN AWEAT HEIGHT.

G-7
CENTER QUARTER CORNER
NO PRIOR CORNER HISTORY.

E-9
NE SECTION CORNER
FOUND 4"x4" DNR BRASS CAP
EXPOSED 4" CARSONITE POST BY MONUMENT
3" PIPES
14" WHITE FIR AT S 29 E @ 13.62'
10" HEMLOCK AT S 59 W @ 23.09'
7" HEMLOCK AT N 35 W @ 12.83'

G-5
WEST QUARTER CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'

G-9
EAST QUARTER CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT S 77 E @ 34.81'
14" HEMLOCK AT S 28 E @ 39.70'
8" HEMLOCK AT S 17 W @ 25.04'
X" ON EASTERLY TOWER LEG 5.7'
ABOVE GROUND AT S 80 W @ 162.00'

J-5
SW SECTION CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'


J-9
SE SECTION CORNER
FOUND 1/2" REBAR W/ PLASTIC CAP
MARKED 7.5" 12918
DNR ALUMINUM CAP EXPOSED 3"
4" PIPES
30" FIR AT N 30 E @ 22.26'
16" HEMLOCK AT S 85 E @ 8.05'
24" FIR AT S 12 W @ 20.71'
24" FIR AT N 84 W @ 15.69'

E-7
GLQ CORNER HISTORY
ORIGINAL CORNER BY CHARLES E. SEARS IN 1873. HE SET A POST WITH A 28" x 4" 60" HEMLOCK 218 CHAINS WEST OF A PERPENDICULAR BLUFF OF ROCK. WE FOUND THE BURNT 60" STUMP & CONFIRMED IT WITH THE BLUFF OF ROCK. THE STUMP HAD AN OVAL, BURNT FACE AN AWEAT HEIGHT.

G-7
CENTER QUARTER CORNER
NO PRIOR CORNER HISTORY.

E-9
NE SECTION CORNER
FOUND 4"x4" DNR BRASS CAP
EXPOSED 4" CARSONITE POST BY MONUMENT
3" PIPES
14" WHITE FIR AT S 29 E @ 13.62'
10" HEMLOCK AT S 59 W @ 23.09'
7" HEMLOCK AT N 35 W @ 12.83'

SCALE:

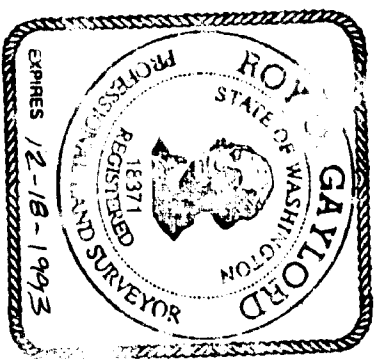

NARRATIVE:

SEARS APPARENTLY STUBBED THE NORTH 1/4 CORNER FROM THE WEST. THE ROCK BLUFF PROBABLY INFLUENCED HIS DECISION.

LOCATION OF SURVEY:

SECTION 8 TOWNSHIP 2 NORTH RANGE 6 EAST, WM, SKAMANIA COUNTY, WA.

BASIS OF BEARING:

USED DNR'S SOUTH LINE OF THE SECTION 8 THEIR FOUND CONTROL POINTS FOR MY BASIS OF BEARING.

REFERENCES:

DNR SURVEY # 106486 OCTOBER, 1988

GLQ, CHARLES E. SEARS, 12/28/1883

LEGEND:

- SET 5/8"x30" IRON ROD W/ CAP
- FOUND MONUMENT OF RECORD
- CALCULATED NOT FOUND OR SET
- DNR PLAT MEASUREMENT
- 2,663.05' = TERRA MEASURE

TERRA SURVEYING:

DATE: MAY, 1993
SCALE: 1" = 500'
PROJECT # 9135
P.O. BOX 617
HOOD RIVER, OR. 97031
PHONE (503) 396-4531

AUDITOR'S CERTIFICATE:

FILED FOR RECORD THIS 9th DAY OF JULY, 1993
AT 1:12 PM IN BOOK 3 OF SURVEYS AT PAGE 120
AT THE REQUEST OF THE LONGVIEW FIBRE COMPANY
116763
AUDITOR'S FILE NUMBER
GARY M. OLSON by D. Osbury
SKAMANIA COUNTY AUDITOR

SURVEY FOR

LONGVIEW FIBRE COMPANY