

# LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

## CORNER INDEXING INFORMATION:

TWP 2N RGE 6E CORNER CODE E-7  
(Willamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

116709

BOOK 136 PAGE 614

COUNTY: SKAMANIA


AUDITOR'S USE

## LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: TERRA SURVEYING

ADDRESS: P.O. Box 617  
HOOD RIVER, OR.  
97031

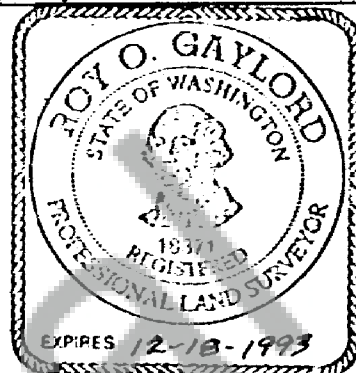

June 3, 1993

*Roy O. Gaylord*

SEAL/SIGNATURE/DATE

WASHINGTON PLANE COORDINATES: N:

E:

ORDER:

ZONE:

DATUM (Date of adjustment):

**CORNER INFORMATION:** Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

DNR HISTORY

CALCULATED NOT FOUND OR SET

TERRA

SET ALUMINUM MONUMENT SET IN Stone mound

SET STEEL FENCE POST ALONG Side.

SET 5/8" V 30' IRON ROD WITH PLASTIC CAP

MARKED TERRA LS 1873

IRON ROD BEARS S. 21° W. 5.13'

SET 5/8" V 30' IRON ROD WITH PLASTIC CAP

MARKED TERRA LS 1873

IRON ROD BEARS S. 73° E 6.78'

Registered	
Indexed, Vir	<u>p</u>
Indirect	<u>p</u>
Filed	<u>p</u>
Filed	

True COMPASS BEARINGS were used to  
LOCATE IRON ROD BEARINGS.

See Filed Survey PLAT Regarding The  
ROCK BLUFF, The Found 60" Hemlock  
STUMP, And why the GLO SURVEYOR  
CHARLES E. SEAR'S Stubbed it in  
in 1883.

REFERENCE TERRA SURVEY #9135 OF  
MAY, 1993, FOR Longview FIBRE. COMPANY.

DATE OF FORM: 2/92

9135

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MN-4-5.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																								
B																								
C	6				5					4				3					2				1	
D																								
E																								
F																								
G	7				8					9				10					11				12	
H																								
J																								
K																								
L	18				17					16				15					14				13	
M																								
N																								
O																								
P	19				20					21				22					23				24	
Q																								
R																								
S																								
T	30				29					28				27					26				25	
U																								
V																								
W																								
X	31				32					33				34					35				36	
Y																								
Z																								

BOOK 136 PAGE 615

RCV 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

GLO Hemlock STUMP BEARS  
N 49W AT 8 LINKS. The corner  
was set from this STUMP using  
the FACE of the STUMP. We  
found an 'O' OVAL in the FACE  
of the BURNED STUMP FACING THE  
CORNER. This WAS PAINTED RED  
and A BEARING TREE TAG & WASHER  
were attached.

Field BOOK #1, PAGES 42 & 43.

