LAND CORNER RECORD FILED FOR RECORD BY Roy Baylord (THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCV 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.) CORNER INDEXING INFORMATION: TVP ZN RGE GE CORNER CODE G-9 (See instructions on back of LCR) (Willamette Meridian) GARY M. OLSON ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.) BOOK 136 PAGE 616 116710 COUNTY: SKAMANIA AUDITOR'S USE O. GAPIO LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090) This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act. COMPANY OR AGENCY: TERRA SURVEYING ADDRESS: P.O. BOX 617 HOOR KINGR, OR. 97031 SEAL/SIGNATURE/DATE

CORNER INFORMATION: Use the space below to provide the following information regarding the corner:

(1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Percetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

OND HISTORY

EATUM (Date of adjustment):

DNR HISTORY

D.N.R. ALUMINUM CAP EXPOSED Y"

IN B.P.A. RIGHT - DF WAY.

Y REFERENCE JOINTS

IG" FIR AT STIE & 34.81'

IY" HEMLOCK AT S. 28° E @ 39.70'

8" HEMLOCK AT S. IT'W. @ 25.04'

"X" ON EASTERLY TOWER LEG 5.7'

ABOVE GROUND AT \$ 80' W & 162.00'

ZONE:

FOUND AND AND THE PROPERTY OF THE PARTY OF T

WASHINGTON PLANE COORDINATES:

ORDER:

No Additional References were Regulated OF Set.

FIELD BOOK 1, PAGES 14 \$15

Reference TERRA SURVEY # 9135 of MAIR, 1993, FOR LONGINEW FIbre Company

Registered	_
igidexed, Oir	b _
indirect.	b _
i i	-
المنطقية المنطقية المنطقية المنطقية المنطقية المنطقية المنطقية المنطقية المنطقة المنطقة المنطقة المنطقة المنطق المنطقة المنطقة	, , -

DATE OF FORM: 2/92


MARK THE CORNER LOCATION ON THE DIAGRAM BELOV AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE: (1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Heander corners, DLC's, HES's,

reservation boundaries, mining claims, etc.): (a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5. (b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SEI/4 of the SEI/4 of section 18 is designated MM-4-5

BOOK /36 PAGE 6/7

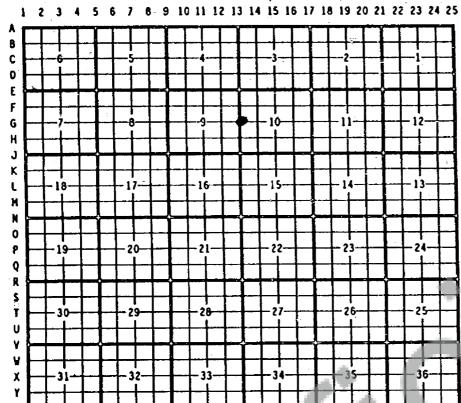

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or

replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and

(d) corollary information that may be helpful to relocate or identify the corner position. SPACE FOR ADDITIONAL COMMENT: