

118208

LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

CORNER INDEXING INFORMATION:

TWP_ 7N RGE_ 4E CORNER CODE_ VW - 25
(Millamette Meridian) (See instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

CLARK COUNTY GPS DESIGNATION : 42600 10 ROAD
GPS CONTROL SERIAL NUMBER : 0091
POINT ALIAS : SWIFT DAM

COUNTY: SKAMANIA

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: CLARK COUNTY SURVEYOR'S OFFICE

ADDRESS: 1300 ESTHER STREET
SUITE 106
VANCOUVER, WA 98660

WASHINGTON PLANE COORDINATES: N: E:

THIS POINT WAS OBSERVED IN THE 1992 CLARK COUNTY GLOBAL POSITIONING SYSTEM SURVEY. CONTACT THE COUNTY SURVEYOR'S OFFICE FOR POSITION INFORMATION.

ORDER: ZONE: DATUM (Date of adjustment):

CORNER INFORMATION: Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Perpetuation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

NOTE: THIS DOCUMENT IS BEING RECORDED IN BOTH CLARK AND SKAMANIA COUNTIES. THE CLARK COUNTY VERSION IS INDEXED IN 77N R4E.

THE POINT IS A 2-1/2 IN DIAMETER BRASS DISK STAMPED "CLARK COUNTY CONTROL POINT 42600 1992" SET INTO A 3/4 INCH IRON PIPE IN THE TOP OF A CONCRETE MONUMENT BURIED 6 INCHES DEEP AND 6 FEET NORTH OF THE NORTH EDGE OF PAVEMENT OF A LOG DUMP OR PARKING LOT. THE PAVED AREA IS ON THE NORTH SIDE OF INTERNATIONAL PAPER (I.P.) ROAD NUMBER 10 AT 1.0 MILES EAST OF THE I.P. MAINLINE ROAD WHICH RUNS ALONG THE SOUTH SIDE OF LEWIS RIVER.

THE STATION IS ABOUT 4 MILES EAST OF THE TOWN OF COUGAR IN THE NW 1/4 NE 1/4 SECTION 31 77N R5E. TO REACH THE STATION FROM THE COUGAR STORE:

- * GO EAST ON SR-503 SPUR (USFS 90) 3.0 MILES TO THE JUNCTION WITH INTERNATIONAL PAPER (I.P.) ROAD NO. 10 AT APPROX. MILEPOST 39.6,
- * GO RIGHT (SOUTHWEST AND WEST) ON ROAD 10 0.2 MILES TO THE BRIDGE OVER SWIFT CREEK AND THE LINE BETWEEN COMLITZ AND CLARK COUNTIES,
- * BEAR LEFT (SOUTH AND EAST) AT THE END OF THE BRIDGE, CONTINUING ON ROAD No. 10 1.0 MILES TO WIDE PAVED AREA ON LEFT. IT IS 32 FEET EAST OF A JEEP ROAD AND APPROXIMATELY AT THE MID POINT OF THE NORTH SIDE OF THE PAVED AREA.

SEE REVERSE FOR SKETCH AND REFERENCES.

BOOK 140 PAGE 144

FILED FOR RECORD
SKAMANIA CO. WASH

BY David Hills
Clark Co Surveyor
Dec 10 4 32 PM '93


P. Lowry
AUDITOR
GARY M. OLSON

AUDITOR'S USE



SEAL/SIGNATURE/DATE

Registered
Indexed, Dir
Indirect
Filed
Mailed

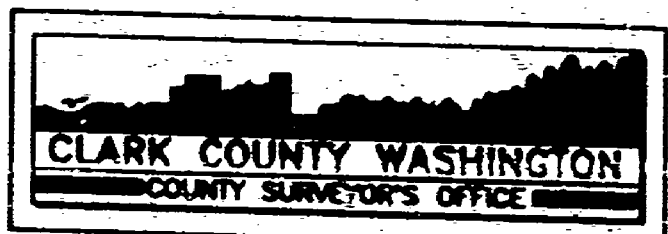

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLC's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "B" and "C" is designated BC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated MK-4-5.

BOOK 140 PAGE 145

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																								
B																								
C		6			5								3				2							
D																								
E																								
F																								
G		7			8				9				10				11							
H																								
J																								
K																								
L		18			17				16				15				14							
M																								
N																								
O																								
P		19			20				21				22				23							
Q																								
R																								
S																								
T		30			29				28				27				26							
U																								
V																								
W																								
X		31			32				33				34				35							
Y																								
Z																								

RCM 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

GPS CONTROL PT. #91

42600 NE. RD #10 (NEAR SWIFT DAM)
(IP RD #10)

FOUND 2 1/2" BRASS DISC SET IN CONC.
10' BELOW GROUND, 7' N. OF N.
EDGE OF A.C. PAVED AREA @ OLD
SORTING YARD (MILL?) 390' ± N. OF
E. RD #10 & 265' E. OF W. EDGE
OF PAVED AREA

RP #1 FOUND 5" IR W/ (RED) CLARK CO. CAP
N. OF PAVED AREA IN LIGHT BUSH AREA
N 60° W; 45' 22"

RP #2 FOUND 5" IR W/ (RED) CLARK CO. CAP
N. OF PAVED AREA IN LIGHT BUSH AREA
N 26° E; 51' 06"


RP #3 FOUND 5" IR W/ (RED) CLARK CO. CAP
0 1/2' N. OF N. EDGE OF PAVED AREA
N 75° E; 43' 02"

RP #4 FOUND 5" IR W/ (RED) CLARK CO. CAP
1' N. OF PAVED AREA @ E. JEEP TRAIL
S 58° W; 30' 02"

3-12-93

HAND COMPASS
100' SET. CAN.

ANDREWS
FADNESS

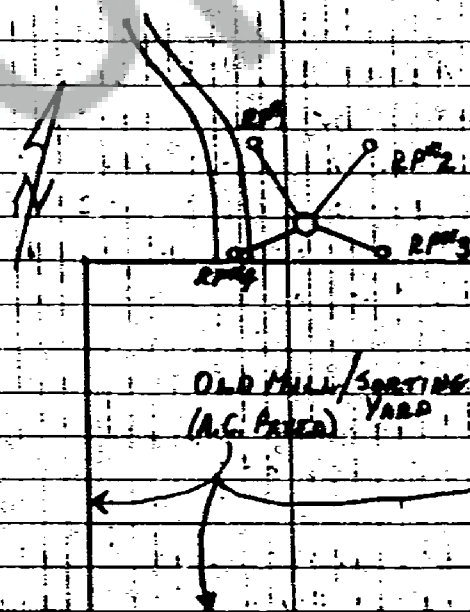

(GRAVE) IP RD #10
← (TO SE5036) (TO SWIFT DAM) →

