

118211

## LAND CORNER RECORD

(THIS FORM PRESCRIBED BY THE PUBLIC LAND SURVEY OFFICE, DEPARTMENT OF NATURAL RESOURCES, PURSUANT TO RCW 58.09. ALPHA-NUMERIC INDEX DIAGRAM ON THE BACK.)

## CORNER INDEXING INFORMATION:

TWP\_6N RGE\_5E CORNER CODE\_ST - 2-3  
(Willamette Meridian) (See Instructions on back of LCR)

ADDITIONAL IDENTIFIER: (e.g., BLM designation for the corner, street intersection, plat name, block, lot, etc.)

CLARK COUNTY GPS DESIGNATION : 42111 S-2000 ROAD  
GPS CONTROL SERIAL NUMBER : 0098  
POINT ALIAS : QUARRY

COUNTY: SKAMANIA

LAND SURVEYOR INFORMATION: (or Public Officer as per RCW 58.09.090)

This corner record correctly represents work performed by me or under my direction in conformance with the Survey Recording Act.

COMPANY OR AGENCY: CLARK COUNTY SURVEYOR'S OFFICE

ADDRESS: 1300 ESTHER STREET  
SUITE 106  
VANCOUVER, WA 98660

WASHINGTON PLANE COORDINATES: N: E:

THIS POINT WAS OBSERVED IN THE 1992 CLARK COUNTY GLOBAL POSITIONING SYSTEM SURVEY. CONTACT THE COUNTY SURVEYOR'S OFFICE FOR POSITION INFORMATION.

ORDER: ZONE: DATUM (Date of adjustment):

**CORNER INFORMATION:** Use the space below to provide the following information regarding the corner: (1) Pertinent Corner History, (2) Evidence Found at the Corner, and (3) Corner Permutation Information. Please title and number the parts of your discussion accordingly. If additional space is needed use the back. (For (3), diagram the references. Also, provide the cross-reference to a map of record, if applicable, the surveyor's field book no./page no., and the date of work.) (See the back of this form for the requirements of the Survey Recording Act.)

**NOTE:** THIS DOCUMENT IS BEING RECORDED IN BOTH CLARK AND SKAMANIA COUNTIES. THE CLARK COUNTY VERSION IS INDEXED IN TEN RAE.

THE POINT IS A 2-1/2 INCH DIAMETER BRASS DISK STAMPED "CLARK COUNTY CONTROL POINT 42111 1992" SET INTO A 3/4 INCH IRON PIPE IN THE TOP OF A CONCRETE MONUMENT FLUSH WITH THE SURFACE AT THE NORTHEASTERLY EDGE OF A WIDE TURNOUT AND OUTSIDE OF A SWITCHBACK IN ROAD S2000 OPPOSITE A ROCK BORROW PIT. THE STATION IS IN THE SE 1/4 NW 1/4 SECTION 30 TOWNSHIP 6 NORTH RANGE 5 EAST WILLAMETTE MERIDIAN.

THE STATION IS ABOUT 6 MILES SOUTHEAST OF COUGAR. TO REACH THE POINT FROM THE COUGAR STORE:

- \* GO EAST ON SR-503 SPUR (USFS 90) 3.0 MILES TO THE JUNCTION WITH INTERNATIONAL PAPER (I.P.) ROAD NO. 10 AT APPROX. MILEPOST 39.6,
- \* GO RIGHT (SOUTHWEST AND WEST) ON ROAD 10 0.2 MILES TO THE BRIDGE OVER SWIFT CREEK AND THE LINE BETWEEN COMLITZ AND CLARK COUNTIES,
- \* BEAR LEFT (SOUTH AND EAST) AT THE END OF THE BRIDGE, CONTINUING ON ROAD No. 10 0.4 MILES TO ROAD S6000,
- \* GO RIGHT (SOUTH) ON S6000 4.7 MILES TO S1000 IN A SADDLE AT MILE POST 5,
- \* CONTINUE SOUTH ON S1000 4.1 MILES TO BRIDGE OVER N. FORK SIOUXON RIVER,
- \* CONTINUE SOUTH ON S1000 0.7 MILES TO S2000,
- \* GO LEFT (NORTHEAST) ON S2000 1.4 MILES TO SWITCHBACK TO RIGHT AND QUARRY.

ALTERNATIVELY, FROM THE INTERSECTION OF STATE ROUTE 503 (NE YALE BRIDGE ROAD) AND NE HEALY ROAD IN THE TOWN OF CHELATCHIE: GO EAST AND NORTH ON HEALY ROAD AND USFS 54 6.5 MILES TO MILE POST 30.5 AND YELLOW GATE ACROSS ROAD 8050 ON THE LEFT,

- \* GO LEFT (EAST AND NORTH) ON 8050 1.1 MILES TO 8050C,
- \* GO LEFT (NORTH) ON 8050C 1.1 MILES TO S1000,
- \* GO RIGHT (EAST) 1.8 MILES TO BRIDGE OVER SIOUXON CREEK,
- \* CONTINUE NORTH ON S1000 0.3 MILES TO S2000,
- \* GO RIGHT (NORTHEAST) ON S-2000 1.4 MILES TO THE STATION.

SEE REVERSE FOR SKETCH AND REFERENCE POINTS.

BOOK 140 PAGE 150


FILED FOR RECORD  
SKAMANIA CO. WASH  
BY David Hills  
Clark Co. Surveyor  
DEC 10 4 41 PM '93  
G. Sherry  
AUDITOR  
GARY H. OLSON

AUDITOR'S USE



SEAL/SIGNATURE/DATE

Registered  
Indexed, Dir  
Indirect  
Filmed  
Mailed

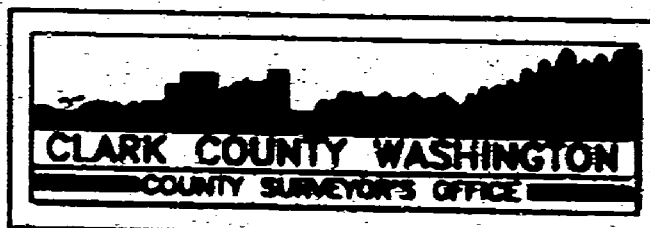

MARK THE CORNER LOCATION ON THE DIAGRAM BELOW AND FILL IN THE CORNER CODE BLANK ON THE OTHER SIDE:

(1) For corners located at the intersection of two lines (Section corners, quarter corners and sixteenth corners):

(a) The corner code is the alpha-numeric coordinate from the diagram below that corresponds to the appropriate intersection of lines.

(2) For corners that are not located at the intersection of two lines (Meander corners, DLO's, HES's, reservation boundaries, mining claims, etc.):

(a) For corners that are on one line only the corner code is the line designation and the related line segment; i.e., a corner on line 5 between "A" and "C" is designated AC-5.

(b) For corners that are between lines the corner code is both line segments; i.e., a corner in the SE1/4 of the SE1/4 of section 18 is designated M-4-5.

BOOK 140 PAGE 151

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																								
B																								
C		6			5			4				3					2							
D																								
E																								
F																								
G		7			8			9				10					11							
H																								
J																								
K																								
L		18			17			16				15					14							
M																								
N																								
O																								
P		19			20			21				22					23							
Q																								
R																								
S																								
T																								
U																								
V																								
W																								
X		31			32			33				34					35							
Y																								
Z																								

RCW 58.09.060 (2) requires the following information on this form: an accurate description and location, in reference to the corner position, of all monuments and accessories (a) found at the corner and (b) placed or replaced at the corner; (c) basis of bearings used to describe or locate such monuments or accessories; and (d) corollary information that may be helpful to relocate or identify the corner position.

SPACE FOR ADDITIONAL COMMENT:

GPS CONTROL PT. #98

42111 RD. S-2000 (DNR)

FOUND 3" BRASS DISC 7' ± FROM EDGE OF TURNOUT @ GRD. LEVEL W/STL POST + B.T. TAG 20° ±, N 30° W

RP#1 FND. 5" IR W/RED CLARK CO. CAP 7' ± FROM TOP OF BANK

N 38° W; 92' ±

W/STL POST + B.T. TAG

RP#2 FND. 5" IR W/RED CLARK CO. CAP 4' ± FROM TOP OF BANK

S 22° E; 30' ±

W/STL POST + B.T. TAG

RP#3 FND. 5" IR W/RED CLARK CO. CAP

5' ± W OF RD. EDGE + 5' ± S. OF

HP 1 1/2 S 32° W; 102' ±

W/STL POST + B.T. TAG

3-18-93

HAND COMPASS  
200' STL. LNN.

ANDREWS  
EADNESS

